


ACCTON TECHNOLOGY CORPORATION ETHERCOAX-8 (EN1809)

NIC Type	Ethernet
Transfer Rate	10Mbps
Data Bus	8-bit ISA
Topology	Linear Bus
Wiring Type	RG-58A/U 50ohm coaxial
	AUI transceiver via DB-15 port
Boot ROM	Available

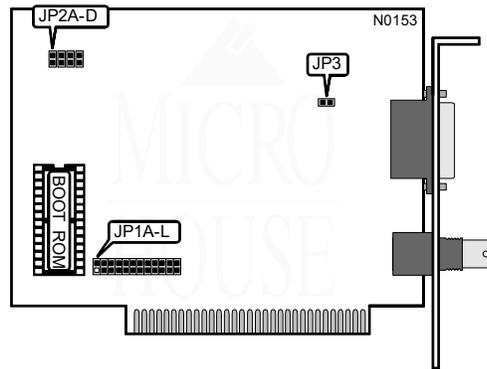

INTERRUPT REQUEST						
IRQ	JP1A	JP1B	JP1C	JP1D	JP1E	JP1F
2	Closed	Open	Open	Open	Open	Open
3	Open	Closed	Open	Open	Open	Open
4	Open	Open	Closed	Open	Open	Open
5	Open	Open	Open	Closed	Open	Open
6	Open	Open	Open	Open	Closed	Open
7	Open	Open	Open	Open	Open	Closed

DMA CHANNEL				
Channel	JP1G	JP1H	JP1I	JP1J
iDisabled	Open	Open	Open	Open
DMA1	Closed	Open	Closed	Open
DMA3	Open	Closed	Open	Closed

I/O BASE ADDRESS		
Address	JP1K	JP1L
i300-31Fh	Closed	Closed
320-33Fh	Open	Closed
340-35Fh	Closed	Open
360-37Fh	Open	Open

Continued next page . . .

ACCTON TECHNOLOGY CORPORATION
ETHERCOAX-8 (EN1809)

... continued from previous page

BOOT ROM	
Setting	JP2A
Disabled	Open
Enabled	Closed

BOOT ROM ADDRESS			
Address	JP2B	JP2C	JP2D
1C8000h	Closed	Closed	Closed
CC000h	Open	Closed	Closed
D8000h	Closed	Open	Closed
DC000h	Open	Open	Closed
E8000h	Closed	Closed	Open
EC000h	Open	Closed	Open

CABLE TYPE	
Type	JP3
IRG-58A/U 50ohm coaxial	Closed
AUI transceiver via DB-15 port	Open