


ARTISOFT, INC.
A 2 M b p s

NIC Type LANTastic
Transfer Rate 2Mbps
Data Bus 8-bit ISA
Topology Star
 Linear Bus (with optional LANTastic Repeater Hub)
Wiring Type Shielded twisted pair
 Belden 9792/Plenum 89729
Boot ROM Available

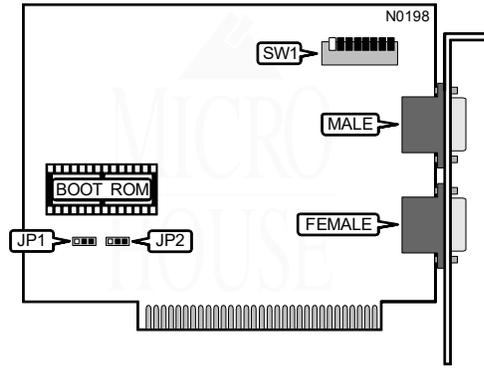

OPTIONAL CHIP SELECTION		
Type	JP1	JP2
32KB RAM chip	Pins 1 & 2 Closed	Pins 1 & 2 Closed
Boot ROM	Pins 2 & 3 Closed	Pins 2 & 3 Closed
Note: This card can use either a 32KB RAM chip or a boot ROM in the boot ROM socket, but not both.		

Continued next page . . .

... continued from previous page

I/O BASE ADDRESS				
Address	SW1/1	SW1/2	SW1/3	SW1/4
200h	Off	Off	Off	Off
220h	Off	Off	Off	On
240h	Off	Off	On	Off
260h	Off	Off	On	On
280h	Off	On	Off	Off
2A0h	Off	On	Off	On
2C0h	Off	On	On	Off
2E0h	Off	On	On	On
300h	On	Off	Off	Off
320h	On	Off	Off	On
340h	On	Off	On	Off
360h	On	Off	On	On
380h	On	On	Off	Off
3A0h	On	On	Off	On
3C0h	On	On	On	Off
3E0h	On	On	On	On

BOOT ROM ADDRESS				
Address	SW1/5	SW1/6	SW1/7	SW1/8
8000h	Off	Off	Off	Off
8800h	Off	Off	Off	On
9000h	Off	Off	On	Off
9800h	Off	Off	On	On
A000h	Off	On	Off	Off
A800h	Off	On	Off	On
B000h	Off	On	On	Off
B800h	Off	On	On	On
C000h	On	Off	Off	Off
C800h	On	Off	Off	On
D000h	On	Off	On	Off
D800h	On	Off	On	On
E000h	On	On	Off	Off
E800h	On	On	Off	On
F000h	On	On	On	Off
F800h	On	On	On	On