


ACCTON TECHNOLOGY CORPORATION  
ETHERPAIR-16 (EN1641)

**NIC Type** Ethernet  
**Transfer Rate** 10Mbps  
**Data Bus** 8/16-bit ISA  
**Topology** Star  
**Wiring Type** Unshielded twisted pair  
 AUI transceiver via DB-15 port  
**Boot ROM** Available

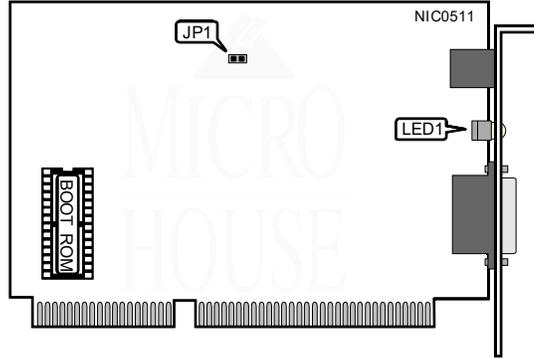

CARD CONFIGURATION					
Mode	I/O Address	IRQ	Cable Type	Boot ROM	JP1
iSoftware	Software	Software	Software	Software	Open
NE1000	280h	Disabled	AUI transceiver	Disabled	Closed

Note: The card is normally configured using the included software utility. The second configuration is provided to allow easier troubleshooting if the system will not boot or locks-up.

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Green	On	Twisted pair network connection is good
LED1	Green	Off	Twisted pair network connection is broken