


CONTROL CORPORATION CNIC/T

NIC Type Ethernet
Transfer Rate 10Mbps
Data Bus 16-bit ISA
Topology Linear Bus, Star
Wiring Type Unshielded twisted pair
Boot ROM Available

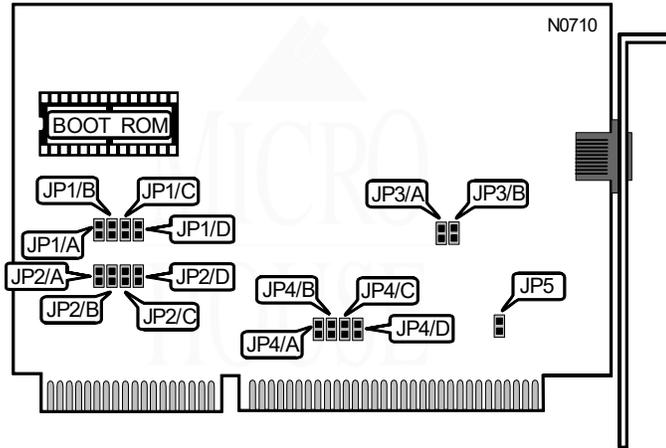

ADDRESS/INTERRUPT SELECT					
I/O Address	Memory Address	DMA	IRQ	JP3/A	JP3/B
300h	C8000h	5	IRQ3	Closed	Closed
320h	CC000h	6	IRQ4	Closed	Open
340h	C0000h	7	IRQ5	Open	Closed
360h	D4000h	3	IRQ9	Open	Open

DMA CONFIGURATION				
DACK	JP1/A	JP1/B	JP1/C	JP1/D
5	Open	Open	Closed	Open
3	Open	Open	Open	Closed
6	Open	Closed	Open	Open
7	Closed	Open	Open	Open

Continued on next page . . .

CONTROL CORPORATION
CNIC/T

... continued from previous page

DMA CONFIGURATION (CONTINUED)				
DRQ	JP2/A	JP2/B	JP2/C	JP2/D
5	Open	Open	Closed	Open
3	Open	Open	Open	Closed
6	Open	Closed	Open	Open
7	Closed	Open	Open	Open

BOOT ROM	
Setting	JP5
Disabled	Open
Enabled	Closed

INTERRUPT SELECT				
IRQ	JP4/A	JP4/B	JP4/C	JP4/D
5	Open	Open	Closed	Open
3	Closed	Open	Open	Open
4	Open	Closed	Open	Open
9	Open	Open	Open	Closed
Disabled	Open	Open	Open	Open