


**Chapter 5: Jumper Settings**  
**SYSKONNECT, INC.**  
**SK-NET FLASH/TP**

**NIC Type** Ethernet  
**Transfer Rate** 10Mbps  
**Data Bus** 16-bit ISA  
**Topology** Star  
**Wiring Type** Unshielded twisted pair  
**Boot ROM** Available (location unidentified)

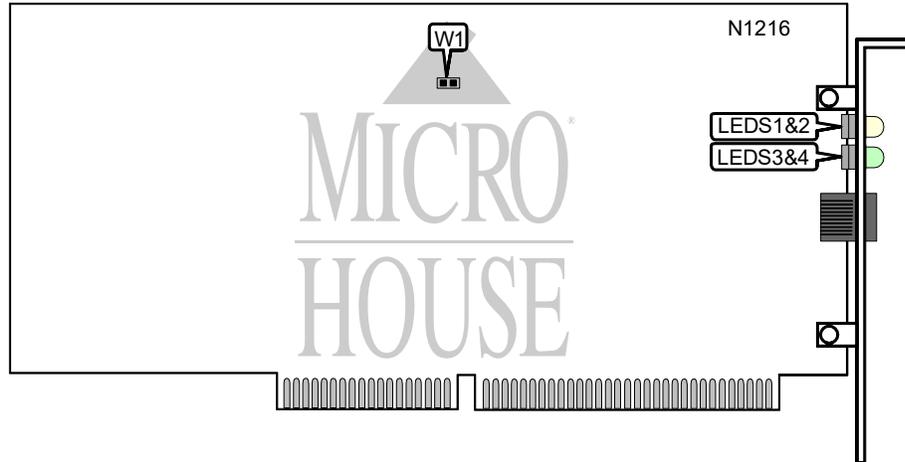

CARD SELECTION	
Setting	W1
Enabled	Closed
Disabled	Open

*Continued next page...*

**THE NETWORK INTERFACE CARD TECHNICAL GUIDE**  
**SYSKONNECT, INT.**  
**SK-NET FLASH**

... continued from previous page.

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Yellow	Blinking	Data is being received
LED1	Yellow	Off	Data is not being received
LED2	Yellow	Blinking	Data is being transmitted
LED2	Yellow	Off	Data is not being transmitted
LED3	Green	On	Polarity is normal
LED3	Green	Off	Polarity is reversed
LED4	Green	On	Network connection is good
LED4	Green	Off	Network connection is broken