



Chapter 5: Jumper Settings
SYSKONNECT, INT.
SK-NET FLASH

NIC Type	Ethernet
Transfer Rate	10Mbps
Data Bus	16-bit ISA
Topology	Linear Bus/Star
Wiring Type	Unshielded twisted pair
	RG-58A/U 50ohm coaxial
Boot ROM	Available (location unidentified)

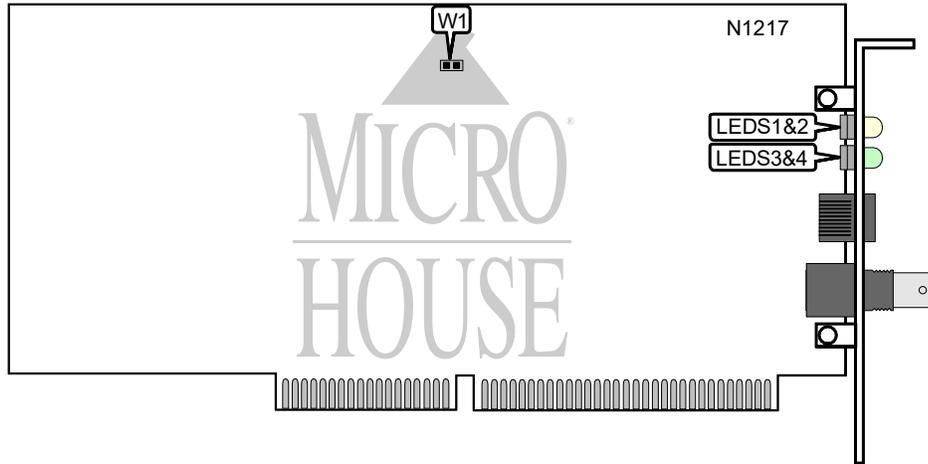

Continued next page...

THE NETWORK INTERFACE CARD TECHNICAL GUIDE
SYSKONNECT, INT.
SK-NET FLASH

... continued from previous page.

CARD SELECTION	
Setting	W1
Enabled	Closed
Disabled	Open

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Yellow	Blinking	Data is being received
LED1	Yellow	Off	Data is not being received
LED2	Yellow	Blinking	Data is being transmitted
LED2	Yellow	Off	Data is not being transmitted
LED3	Green	On	10Base-T polarity is normal
LED3	Green	Off	10Base-T polarity is reversed
LED4	Green	On	10Base-T network connection is good
LED4	Green	Off	10Base-T network connection is broken