


COMPU-SHACK PRODUCTION, GMBH

CS-FDDI PCI-MMF-SAS

Card Type	Network Interface Card
NIC Type	FDDI
Maximum Onboard Memory	Unidentified
Boot ROM	Available
Network Transfer Rate	100Mbps
Topology	Ring
Wiring Type	Fiber optic cable
Data Bus	32-bit PCI

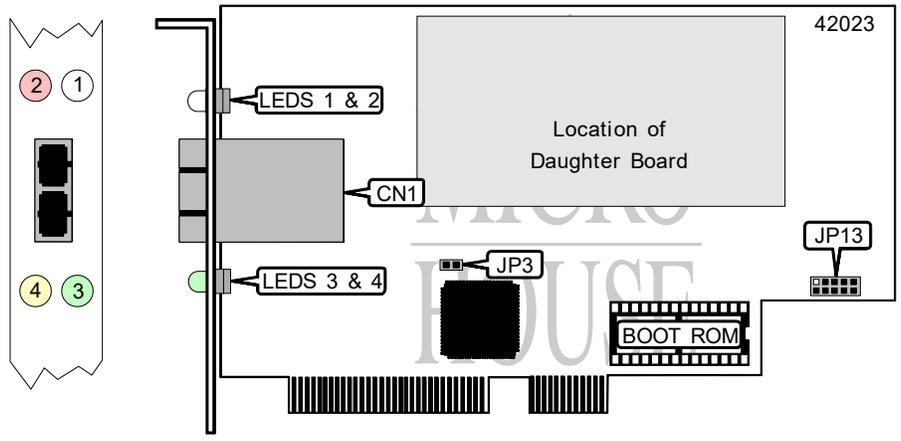

CONNECTIONS	
Function	Label
Fiber-optic connector via MIC	CN1

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Boot ROM disabled	JP13/A	Open
Boot ROM enabled	JP13/A	Closed
í Factory configured - do not alter	JP13/E	Unidentified
í Factory configured - do not alter	JP3	Unidentified

BASE I/O ADDRESS SELECTION			
Address	JP13/B	JP13/C	JP13/D
200h-21Fh	Closed	Closed	Closed
220h-23Fh	Closed	Closed	Open
240h-25Fh	Closed	Open	Closed
280h-29Fh	Closed	Open	Open
í 300h-31Fh	Open	Closed	Closed
320h-33Fh	Open	Closed	Open
340h-35Fh	Open	Open	Closed

Continued on next page. . .


COMPU-SHACK PRODUCTION, GMBH

CS-FDDI PCI-MMF-SAS

. . . continued from previous page

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Unidentified	On	See conditions in note below
LED1	Unidentified	Off	See conditions in note below
LED2	Red	On	Cable fault detected (SDDI only)
LED2	Red	Off	No cable fault detected (SDDI only)
LED3	Green	On	Network connection is good
LED3	Green	Off	Network connection is broken
LED4	Yellow	On	Data is being transmitted/received
LED4	Yellow	Off	Data is not being transmitted/received

Note: LED1 varies depending on model. Green (On: UTP link is good, Off: UTP link is broken); Red (On: Illegal connection, Off: Valid connection); or Orange (On: Line error alarm activated, Off: Line error alarm not activated).

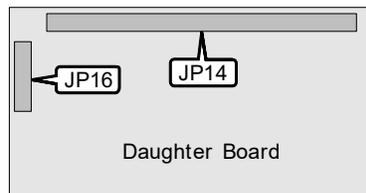

USER CONFIGURABLE SETTINGS
Note: JP14 and JP16 are unidentified.