


ACCTON TECHNOLOGY CORPORATION ETHERCOMBO-98X (EN1668)

| | |
|------------------------|---|
| Card Type | Network Interface Card |
| NIC Type | Ethernet |
| Maximum Onboard Memory | 16KB |
| Boot ROM | Unidentified |
| Network Transfer Rate | 10Mbps |
| Topology | Linear Bus, Star |
| Wiring Type | Unshielded twisted pair AUI transceiver via DB-15 port RG-58A/U 50ohm coaxial |
| Data Bus | 16-bit ISA |

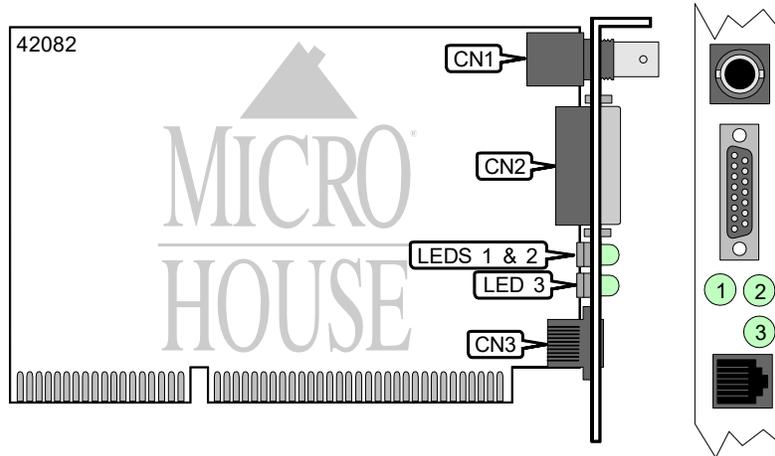

| CONNECTIONS | | | |
|--------------------------------|-------|-----------------|-------|
| Function | Label | Function | Label |
| RG-58A/U connector | CN1 | RJ-45 connector | CN3 |
| AUI transceiver via DB-15 port | CN2 | | |

| DIAGNOSTIC LED(S) | | | |
|-------------------|-------|----------|--|
| LED | Color | Status | Condition |
| LED1 | Green | On | Data is being transmitted |
| LED1 | Green | Blinking | Light or intermittent network transmission |
| LED1 | Green | Off | Data is not being transmitted |
| LED2 | Green | On | Data is being received |
| LED2 | Green | Blinking | Light or intermittent network reception |
| LED2 | Green | Off | Data is not being received |
| LED3 | Green | On | UTP link is good |
| LED3 | Green | Off | UTP link is broken |