


ACCTON TECHNOLOGY CORPORATION
ETHERCOAX-8 (EN1809)
143809-402

NIC Type Ethernet
Transfer Rate 10Mbps
Data Bus 8-bit ISA
Topology Linear Bus
Wiring Type RG-58A/U 50ohm coaxial
 AUI transceiver via DB-15 port
Boot ROM Available

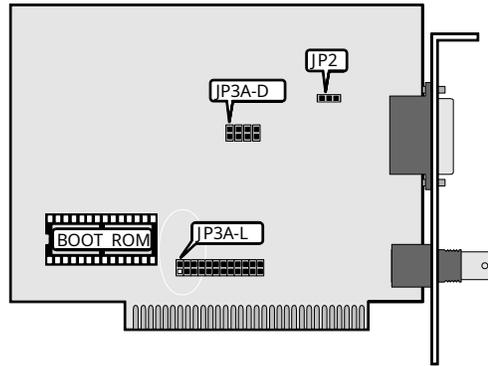

INTERRUPT REQUEST						
IRQ	JP3A	JP3B	JP3C	JP3D	JP3E	JP3F
2	Closed	Open	Open	Open	Open	Open
3	Open	Closed	Open	Open	Open	Open
4	Open	Open	Closed	Open	Open	Open
5	Open	Open	Open	Closed	Open	Open
6	Open	Open	Open	Open	Closed	Open
7	Open	Open	Open	Open	Open	Closed

DMA CHANNEL				
Channel	JP3G	JP3H	JP3I	JP3J
iDisabled	Open	Open	Open	Open
DMA1	Closed	Open	Closed	Open
DMA3	Open	Closed	Open	Closed

I/O BASE ADDRESS		
Address	JP3K	JP3L
i300-31Fh	Closed	Closed
320-33Fh	Open	Closed
340-35Fh	Closed	Open
360-37Fh	Open	Open

Continued next page . . .

ACCTON TECHNOLOGY CORPORATION
 ETHERCOAX-8 (EN1809)
 143809-402

... continued from previous page

BOOT ROM	
Setting	JP1A
Disabled	Open
Enabled	Closed

BOOT ROM ADDRESS			
Address	JP1B	JP1C	JP1D
IC8000h	Closed	Closed	Closed
CC000h	Open	Closed	Closed
D8000h	Closed	Open	Closed
DC000h	Open	Open	Closed
E8000h	Closed	Closed	Open
EC000h	Open	Closed	Open

CABLE TYPE	
Type	JP2
IRG-58A/U 50ohm coaxial	Closed
AUI transceiver via DB-15 port	Open