


PLANET TECHNOLOGY CORPORATION SMART COM ISA (ENW-2400P-T/2T)

NIC Type	Ethernet
Network Transfer Rate	10Mbps
Data Bus	16-bit ISA
Topology	Linear Bus, Star
Wiring Type	Unshielded twisted pair AUI transceiver via DB-15 port RG-58A/U 50ohm coaxial
Boot ROM	Available

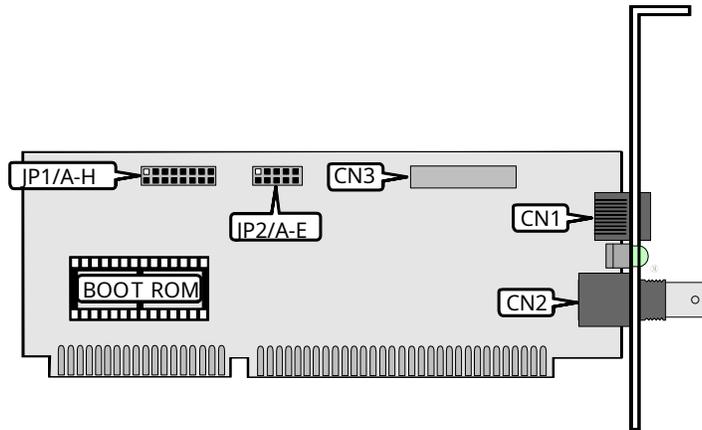

CONNECTIONS			
Function	Label	Function	Label
Unshielded twisted pair port	CN1	RG-58A/U 50ohm coaxial port	CN2
AUI transceiver via header	CN3		

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
PnP mode	JP1/H	Open	
Jumper mode	JP1/H	Closed	

INTERRUPT SELECTION			
IRQ	JP1/E	JP1/F	JP1/G
2/9	Open	Open	Open
3	Open	Open	Closed
4	Open	Closed	Open
5	Open	Closed	Closed
10	Closed	Open	Open
11	Closed	Open	Closed
12	Closed	Closed	Open
15	Closed	Closed	Closed

Continued on next page. . .

PLANET TECHNOLOGY CORPORATION

SMART COM ISA (ENW-2400P-T/2T)

... continued from previous page

BASE I/O ADDRESS SELECTION				
Setting	JP1/A	JP1/B	JP1/C	JP1/E
300h	Open	Open	Open	Open
320h	Open	Open	Open	Closed
340h	Open	Open	Closed	Open
360h	Open	Open	Closed	Closed
380h	Closed	Open	Open	Open
3A0h	Closed	Open	Open	Closed
3C0h	Closed	Open	Closed	Open
3E0h	Closed	Open	Closed	Closed
200h	Open	Closed	Open	Open
220h	Open	Closed	Open	Closed
240h	Open	Closed	Closed	Open
260h	Open	Closed	Closed	Closed
280h	Closed	Closed	Open	Open
2A0h	Closed	Closed	Open	Closed
2C0h	Closed	Closed	Closed	Open
2E0h	Closed	Closed	Closed	Closed

ROM ADDRESS SELECTION					
Address	JP2/A	JP2/B	JP2/C	JP2/D	JP2/E
Disabled	Open	Open	Open	Open	Open
C000h, 32KB	Open	Closed	Open	Open	Open
C800h, 32KB	Open	Closed	Open	Open	Closed
D000h, 32KB	Open	Closed	Open	Closed	Open
D800h, 32KB	Open	Closed	Open	Closed	Closed
C000h, 64KB	Open	Closed	Closed	Open	Open
D000h, 64KB	Open	Closed	Closed	Open	Closed
C000h, 16KB	Closed	Open	Open	Open	Open
C400h, 16KB	Closed	Open	Open	Open	Closed
C800h, 16KB	Closed	Open	Open	Closed	Open
CC00h, 16KB	Closed	Open	Open	Closed	Closed
D000h, 16KB	Closed	Open	Closed	Open	Open
D400h, 16KB	Closed	Open	Closed	Open	Closed
D800h, 16KB	Closed	Open	Closed	Closed	Open
DC00h, 16KB	Closed	Open	Closed	Closed	Closed

TECHNICAL NOTE

Note: The exact purpose and location of JP3 is unidentified.