


JAMECO ELECTRONIC COMPONENTS

JE3006

Processor	80286
Processor Speed	8/12MHz
Chip Set	Headland
Max. Onboard DRAM	4MB
Cache	None
BIOS	AMI
Dimensions	220mm x 220mm
I/O Options	None
NPU Options	80287

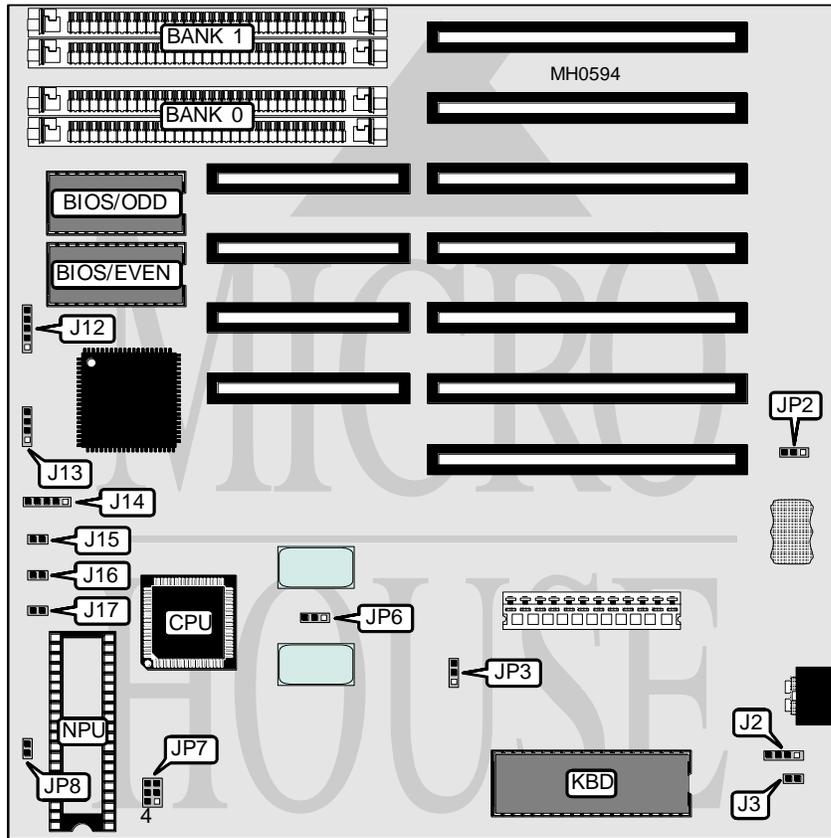

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J2	Power LED & keylock	J14
Turbo switch	J3 or J16	Reset switch	J15
Speaker	J13	Turbo LED	J17

Continued on next page . . .

JAMECO ELECTRONIC COMPONENTS

JE3006

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Battery type select external	JP2	pins 1 & 2 closed
Battery type select internal	JP2	pins 2 & 3 closed
í Monitor type select color	JP3	Closed
Monitor type select monochrome	JP3	Open
í Factory configured - do not alter	JP6	pins 1 & 2 closed
í Factory configured - do not alter	J12	N/A

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
512KB	(2) 256K x 9	NONE
1MB	(2) 256K x 9	(2) 256K x 9
2MB	(2) 1M x 9	NONE
2.5MB	(2) 256K x 9	(2) 1M x 9
4MB	(2) 1M x 9	(2) 1M x 9

NPU CONFIGURATION		
Speed	JP7	JP8
8MHz	pins 2 & 5 closed	Closed
10MHz	pins 5 & 6 closed	Closed
12MHz	pins 4 & 5 closed	Open