


INFORMTECH INTERNATIONAL, INC.

Q P 2 8 6 A D

Processor	80286
Processor Speed	16MHz
Chip Set	C & T
Max. Onboard DRAM	8MB
SRAM Cache	None
BIOS	Award
Dimensions	330mm x 218mm
I/O Options	Floppy drive interface, game port, IDE interface, parallel port, serial ports (2), VGA interface
NPU Options	80287

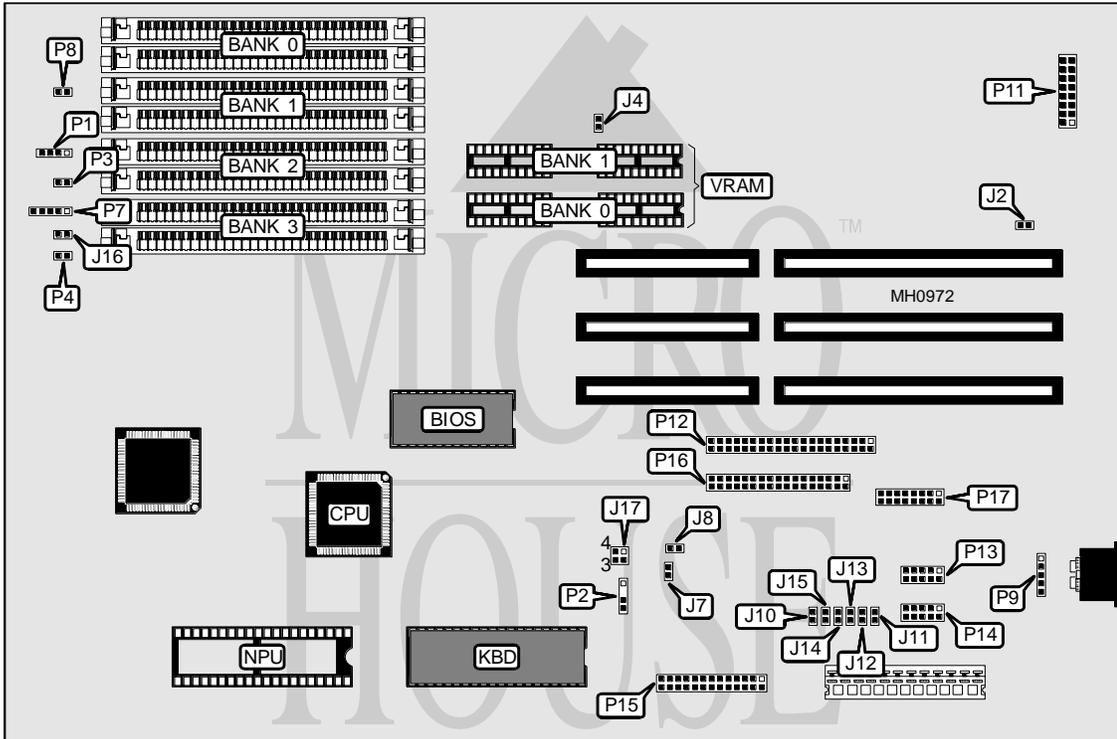

CONNECTIONS			
Purpose	Location	Purpose	Location
Speaker	P1	VGA interface	P11
External battery	P2	IDE interface	P12
Reset switch	P3	Serial port 2	P13
IDE interface LED	P4	Serial port 1	P14
Power LED & keylock	P7	Parallel port	P15
Turbo LED	P8	Floppy drive interface	P16
Auxiliary keyboard	P9	Game port	P17

Continued on next page . . .

INFORMTECH INTERNATIONAL, INC.

Q P 2 8 6 A D

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í VGA interrupt select none	J2	Open
VGA interrupt select IRQ9	J2	Closed
í VGA interface enabled	J4	Closed
VGA interface disabled	J4	Open
í Floppy drive interface enabled	J10	Open
Floppy drive interface disabled	J10	Closed
í Monitor type select color	J16	Closed
Monitor type select monochrome	J16	Open
í Battery select internal 3.6VDC with current limiting resistor	J17	pins 2 & 3 closed
Battery select internal 4.5VDC alkaline	J17	pins 3 & 4 closed
Battery select external 6VDC	J17	pins 1 & 4 closed

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
512KB	(2) 256K x 9	NONE	NONE	NONE
1MB	(2) 256K x 9	(2) 256K x 9	NONE	NONE
1.5MB	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9	NONE
2MB	(2) 256K x 9			
2MB	(2) 1M x 9	NONE	NONE	NONE
2.5MB	(2) 256K x 9	(2) 1M x 9	NONE	NONE
3MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	NONE
4MB	(2) 1M x 9	(2) 1M x 9	NONE	NONE
4.5MB	(2) 256K x 9	(2) 1M x 9	(2) 1M x 9	NONE
5MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	(2) 1M x 9
6MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	NONE
6.5MB	(2) 256K x 9	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9
8MB	(2) 1M x 9			

PARALLEL PORT CONFIGURATION		
Setting	J14	J15
LPT1	Open	Closed
LPT2	Open	Open
LPT3	Closed	Open
Disabled	Closed	Closed

SERIAL PORT CONFIGURATION				
UART1	UART2	J11	J12	J13
COM1	COM2	Open	Open	Open
COM1	Disabled	Open	Closed	Open
COM2	COM1	Closed	Open	Open
Disabled	COM1	Closed	Open	Closed
Disabled	COM2	Open	Open	Closed
COM2	Disabled	Closed	Closed	Open
Disabled	Disabled	N/A	Closed	Closed

Continued on next page . . .

INFORMTECH INTERNATIONAL, INC.**Q P 2 8 6 A D**

... continued from previous page

VRAM CONFIGURATION		
Size	Bank 0	Bank 1
256KB	(2) 44256	NONE
512KB	(2) 44256	(2) 44256

IDE CONFIGURATION		
Setting	J7	J8
Enabled	Closed	Closed
Disabled	Open	Open