


# IBM CORPORATION PERSONAL COMPUTER

**Processor** 8088  
**Processor Speed** 8MHz  
**Chip Set** None  
**Max. Onboard DRAM** 64KB  
**Cache** None  
**BIOS** AMI/MR  
**Dimensions** 355mm x 304mm  
**I/O Options** Cassette interface  
**NPU Options** 8087

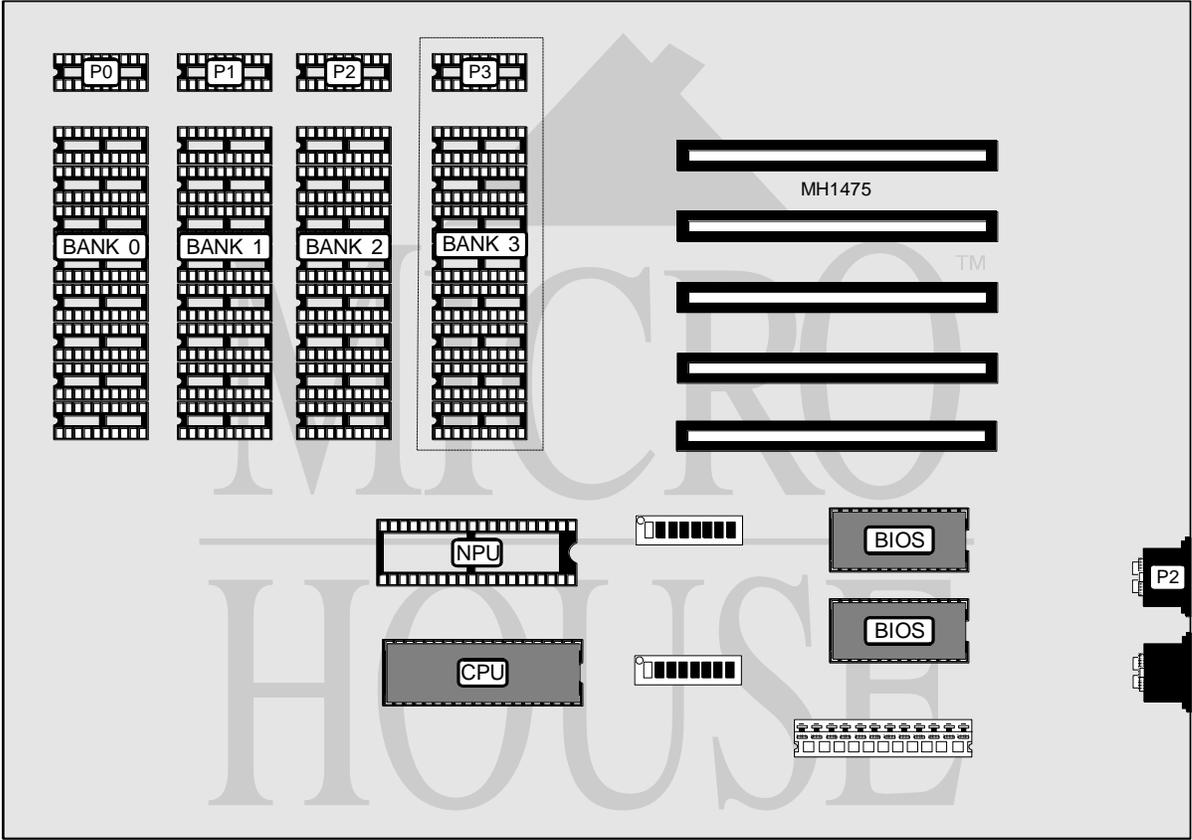

CONNECTIONS	
Purpose	Location
Cassette interface	P2

Continued on next page . . .

# IBM CORPORATION PERSONAL COMPUTER

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Switch	Position
NPU enabled	SW1/switch 2	on
NPU disabled	SW1/switch 2	off

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
16KB	(9) 4116	NONE	NONE	NONE
32KB	(9) 4116	(9) 4116	NONE	NONE
48KB	(9) 4116	(9) 4116	(9) 4116	NONE
64KB	(9) 4116	(9) 4116	(9) 4116	(9) 4116

DRAM CONFIGURATION - Switch SW1								
Size	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5	SW1/6	SW1/7	SW1/8
16KB	off	off	on	on	off	off	off	off
32KB	off	off	off	on	off	off	off	off
48KB	off	off	on	off	off	off	off	off
64KB	off	off	on	off	off	off	off	off

DRAM CONFIGURATION - Switch SW2								
Size	SW2/1	SW2/2	SW2/3	SW2/4	SW2/5	SW2/6	SW2/7	SW2/8
16KB	on	on	on	on	on	off	off	off
32KB	on	on	on	on	on	off	off	off
48KB	on	on	on	on	on	off	off	off
64KB	on	on	on	on	on	off	off	off

FLOPPY DRIVES INSTALLED			
Drives	SW1/1	SW1/7	SW1/8
0	On	On	On
1	Off	On	On
2	Off	Off	On

MONITOR TYPE CONFIGURATION		
Type	SW1/5	SW1/6
Color 40 x 25	Off	On
Color 80 x 25	On	Off
Monochrome	Off	Off