


# INFORMTECH INTERNATIONAL, INC.

## IT - A M 4 0

<b>Processor</b>	80386DX/CX486DLC
<b>Processor Speed</b>	16/25/33/40MHz
<b>Chip Set</b>	Unidentified
<b>Max. Onboard DRAM</b>	32MB
<b>Cache</b>	64KB
<b>BIOS</b>	AMI
<b>Dimensions</b>	220mm x 218mm
<b>I/O Options</b>	None
<b>NPU Options</b>	None

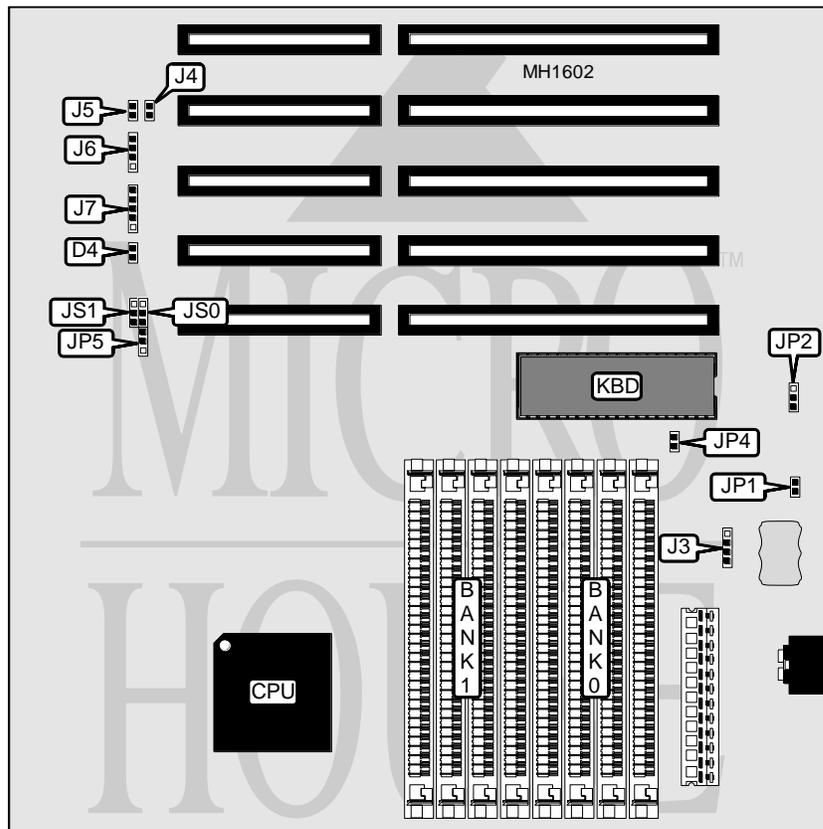

CONNECTIONS			
Purpose	Location	Purpose	Location
Turbo LED	D4	Reset switch	J5
External battery	J3	Speaker	J6
Turbo switch	J4	Power LED & keylock	J7

Continued on next page . . .

**INFORMTECH INTERNATIONAL, INC.**  
**IT - A M 4 0**

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í MC146818 enabled	JP1	pins 2 & 3 closed
DS1287 enabled	JP1	pins 1 & 2 closed
í CMOS memory normal operation	JP2	pins 1 & 2 closed
CMOS memory clear	JP2	pins 2 & 3 closed
í Monitor type select color	JP4	Closed
Monitor type select monochrome	JP4	Open

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
5MB	(4) 1M x 9	(4) 256K x 9
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
17MB	(4) 4M x 9	(4) 256K x 9
20MB	(4) 4M x 9	(4) 1M x 9
32MB	(4) 4M x 9	(4) 4M x 9

CPU TYPE CONFIGURATION	
CPU Type	JP5
Intel/AMD	pins 1 & 2 closed
Cyrix	pins 2 & 3 closed

CPU SPEED CONFIGURATION		
Speed	JS0	JS1
16MHz	pins 2 & 3 closed	pins 2 & 3 closed
25MHz	pins 1 & 2 closed	pins 2 & 3 closed
33MHz	pins 2 & 3 closed	pins 1 & 2 closed
40MHz	pins 1 & 2 closed	pins 1 & 2 closed