SIEMENS NIXDORF INFORMATIONSSYSTEME AG
S 2 6 3 6 1 - D 8 4 1

Processor	Pentium Overdrive/Pentium
Processor Speed	60MHz
Chip Set	Unidentified
Max. Onboard DRAM	128MB
Cache	256KB
BIOS	Unidentified
Dimensions	310mm x 254mm
I/O Options	PS/2 mouse port, parallel port, serial ports (2), VGA port, VGA feature connector, floppy drive interface, IDE interface
NPU Options	None

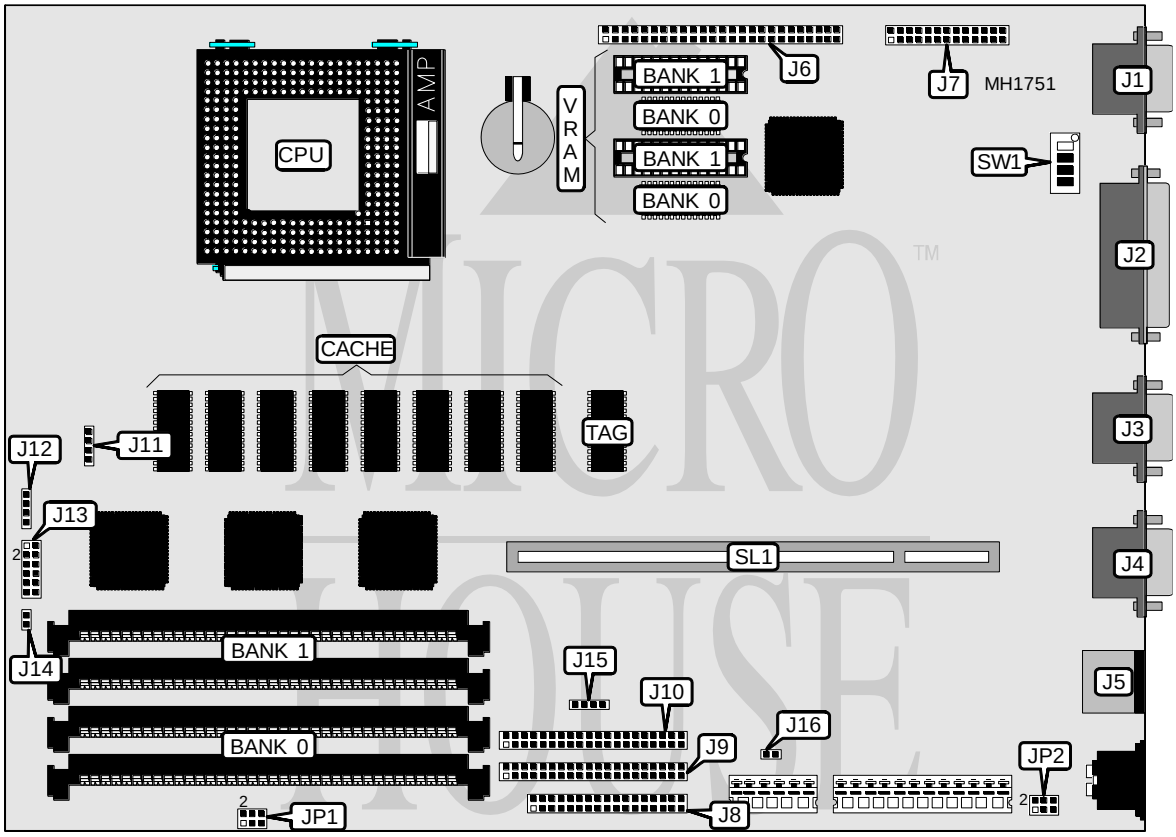

CONNECTIONS			
Purpose	Location	Purpose	Location
VGA port	J1	CPU fan connector	J11
Parallel port	J2	Speaker	J12
Serial port	J3	Power LED	J13 pins 1 & 7
Serial port 1	J4	Reset switch	J13 pins 5 & 11
PS/2 mouse port	J5	IDE hard drive LED	J13 pins 12 & 11
Proprietary image connector	J6	Keylock	J14
VGA feature connector	J7	SCSI hard drive LED	J15
Floppy drive interface	J8	Remote power-on connector	J16
IDE interface (primary)	J9	Proprietary riser card slot	SL1
IDE interface (secondary)	J10		

Continued on next page. . .

Copyright © 1994, 1995, **Micro House International** (303) 443-3388. All rights reserved. Including the right of reproduction in any form.

SIEMENS NIXDORF INFORMATIONSSYSTEME AG
S Y S T E M B A U G R U P P E S 2 6 3 6 1 - D 8 4 1

. . . continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper/Switch	Position
í Flash BIOS normal operation	SW1/1	Off
Flash BIOS recovery mode	SW1/1	On
í Password enabled	SW1/2	Off
Password disabled	SW1/2	On
í BIOS write protect enabled	SW1/3	Off
BIOS write protect disabled	SW1/3	On
í Floppy interface enabled	SW1/4	Off
Floppy interface disabled	SW1/4	On

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
128MB	(2) 8M x 36	(2) 8M x 36

VRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(2) 441000	NONE
2MB	(2) 441000	(2) 441000

Copyright © 1994, 1995, **Micro House International** (303) 443-3388. All rights reserved. Including the right of reproduction in any form.