


DELL COMPUTER CORPORATION

4XX/ME, 4XXS/ME

Processor	80486SX/80486DX/80486DX2
Processor Speed	25/33/50(internal)/66(internal)MHz
Chip Set	Intel
Max. Onboard DRAM	64MB
Cache	128KB (on external cache card)
BIOS	Phoenix
Dimensions	330mm x 218mm
I/O Options	Floppy drive interface, IDE interface, parallel port, PS/2 mouse port, serial ports (2), VGA feature connector, VGA port
NPU Options	None

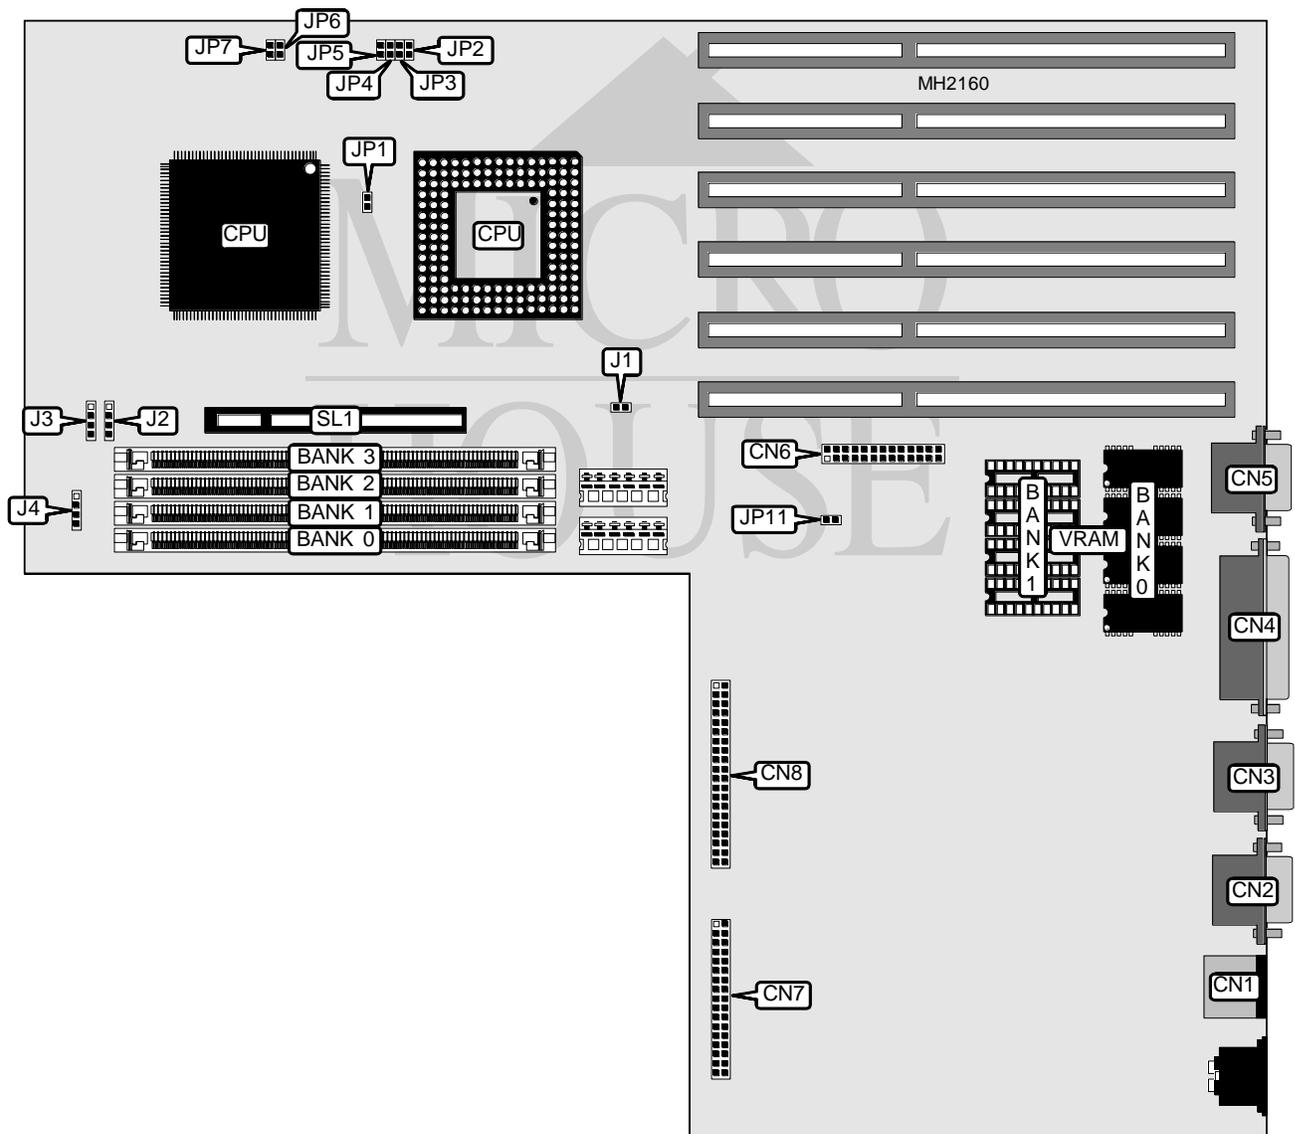

Continued on next page. . .

DELL COMPUTER CORPORATION

4XX/ME, 4XS/ME

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
PS/2 mouse port	CN1	IDE interface	CN8
Serial port 1	CN2	IDE interface LED	J1
Serial port 2	CN3	Chassis fan power	J2
Parallel port	CN4	External battery	J3
VGA port	CN5	Front panel connector	J4
VGA feature connector	CN6	External cache card slot	SL1
Floppy drive interface	CN7		

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í External cache card not installed (486/M mainboard only)	JP1	Open
External cache card installed (486/M mainboard only)	JP1	Closed
í Password enabled	JP2	Closed
Password disabled	JP2	Open
í Factory configured - do not alter	JP3	Open
í BIOS & EISA upgrade from diskette enabled	JP4	Closed
BIOS & EISA upgrade from diskette disabled	JP4	Open
í On board VGA enabled	JP5	Closed
On board VGA disabled	JP5	Open
í EISA configuration retained at boot	JP7	Open
EISA configuration cleared at boot	JP7	Closed
í Factory configured - do not alter	JP11	Open

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
4MB	(1) 1M x 36	NONE	NONE	NONE
8MB	(1) 1M x 36	(1) 1M x 36	NONE	NONE
12MB	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36	NONE
16MB	(1) 1M x 36			
16MB	(1) 4M x 36	NONE	NONE	NONE
20MB	(1) 4M x 36	(1) 1M x 36	NONE	NONE
24MB	(1) 4M x 36	(1) 1M x 36	(1) 1M x 36	NONE
28MB	(1) 4M x 36	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36
32MB	(1) 4M x 36	(1) 4M x 36	NONE	NONE
36MB	(1) 4M x 36	(1) 4M x 36	(1) 1M x 36	NONE
40MB	(1) 4M x 36	(1) 4M x 36	(1) 1M x 36	(1) 1M x 36
48MB	(1) 4M x 36	(1) 4M x 36	(1) 4M x 36	NONE
52MB	(1) 4M x 36	(1) 4M x 36	(1) 4M x 36	(1) 1M x 36
64MB	(1) 4M x 36			

Continued on next page. ...

DELL COMPUTER CORPORATION

4XX/ME, 4XXS/ME

... continued from previous page

CPU SPEED CONFIGURATION	
Speed	JP6
25MHz	Closed
33MHz	Open
50iMHz	Closed
66iMHz	Open

VIDEO MEMORY CONFIGURATION		
Wait states	Bank 0	Bank 1
512KB	(4) 256K x 4	NONE
1MB	(4) 256K x 4	(4) 256K x 4
Note: Bank 0 is factory installed and is not configurable.		