


SUMO SYSTEMS / STORAGE PLUS, INC.
SPI 200
Formerly the SCSI AT-R1

Q4/92

Data bus: 8-bit, ISA
 Size: Half-length, full-height card
 Hard drives supported: Up to seven SCSI devices
 Floppy drives supported: Two 320KB, 720KB, 1.2MB OR 1.44MB

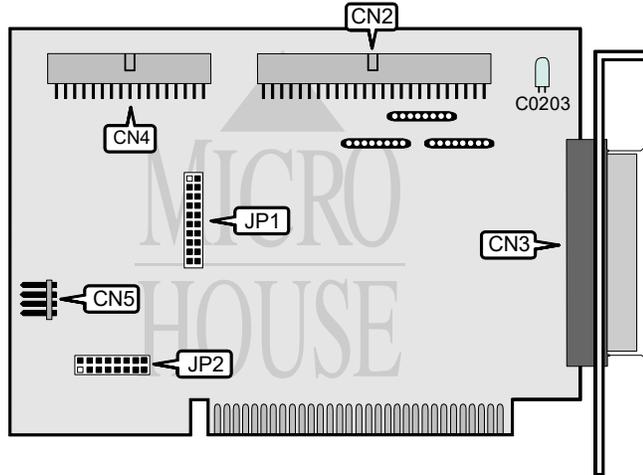

CONNECTIONS	
Function	Location
50-pin SCSI connector-internal	CN2
50-pin SCSI connector-external	CN3
34-pin control cable connector-floppy drive	CN4
4-pin connector-LED Drive Active	CN5

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
Zero Wait State enabled	JP1/jumper 1	closed
Zero Wait State disabled	JP1/jumper 1	open
Factory configured - do not alter	JP1/jumper 2	open
Floppy drive enabled	JP1/jumper 3	closed
Floppy drive disabled	JP1/jumper 3	open

Continued on next page . . .

SUMO SYSTEMS / STORAGE PLUS, INC.
SPI 200
Formerly the SCSI AT-R1

... continued from previous page

BIOS ADDRESS			
Address	JP1/jumper 4	JP1/jumper 5	JP1/jumper 6
í D800h	closed	open	closed
Disabled	open	open	open
C800h	closed	closed	closed
CC00h	open	closed	closed
DC00h	open	open	closed

I/O PORT ADDRESS				
Address	JP1/jumper 7	JP1/jumper 8	JP1/jumper 9	JP1/jumper 10
Disabled	N/A	N/A	N/A	open
300h	closed	closed	closed	closed
í 310h	open	closed	closed	closed
320h	closed	open	closed	closed
330h	open	open	closed	closed
340h	closed	closed	open	closed
350h	open	closed	open	closed
360h	closed	open	open	closed
370h	open	open	open	closed

INTERRUPT REQUEST JUMPERS - JP2								
IRQ	J1	J2	J3	J4	J5	J6	J7	J8
Disabled	open							
IRQ3	closed	open						
IRQ4	open	closed	open	open	open	open	open	open
IRQ5	open	open	closed	open	open	open	open	open
IRQ10	open	open	open	closed	open	open	open	open
IRQ11	open	open	open	open	closed	open	open	open
IRQ12	open	open	open	open	open	closed	open	open
í IRQ14	open	open	open	open	open	open	closed	open
IRQ15	open	closed						