


# ARTOP ELECTRONIC CORPORATION AEC6710F

Card Type	Hard drive controller card
Hard Drives supported	Up to 7 SCSI-2 Fast devices
Floppy drives supported	None
Data Bus	32-bit PCI
Card Size	Full-height, quarter-length card

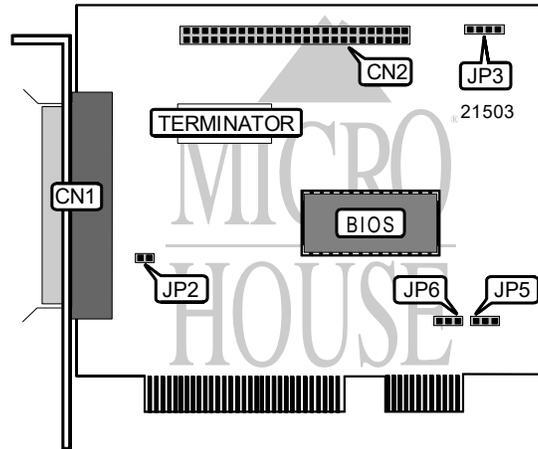

CONNECTIONS			
Function	Location	Function	Location
50-pin SCSI connector - external	CN1	4-pin connector - drive active LED	JP3
50-pin SCSI connector - internal	CN2		

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
Termination power supply	JP2	Unidentified	
Factory configured - do not alter	JP5	N/A	
Flash ROM normal mode	JP6	Pins 1 & 2 closed	
Flash ROM emergency mode	JP6	Pins 2 & 3 closed	
Note: Jumper JP6 position 2 & 3 is for emergency use only. When the system has written to the Flash ROM more than 10,000 times, an error message is posted that requests jumper JP6 be moved to pins 2 & 3. The flash ROM should then be replaced as soon as possible so normal mode can be resumed.			