


MONOLITHIC SYSTEMS INC. (COLORADO MSI)

MICROFRAME MEM32 (REVISION A1)

Card Type Memory card
Chipset/Controller N/A
I/O Options N/A
Maximum DRAM 8192KB

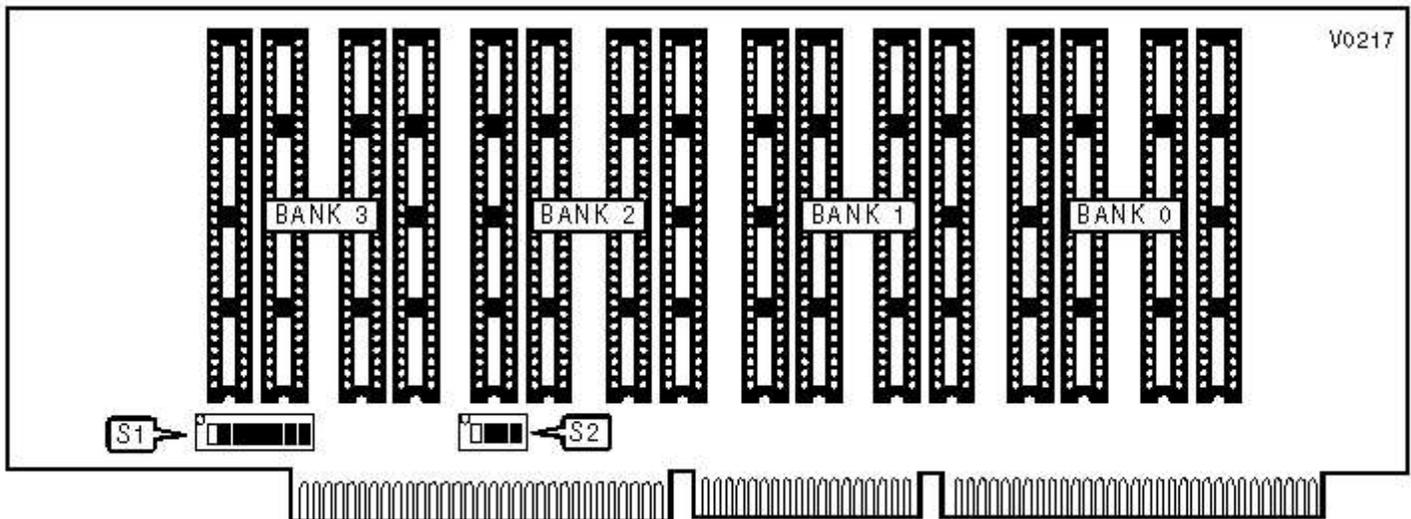

MEMORY SETTINGS FOR 8MB MICROFRAME 386CT MOTHERBOARD

MEM32	Total Memory	S1/1	S1/3	S1/5	S1/6	S1/7	S1/8	S2/1	S2/2	S2/3
4MB	12MB	Off	On	Off	Off	Off	Off	On	Off	Off
8MB	16MB	Off	On	Off	Off	Off	On	Off	Off	On

Note: S1/switches 2 & 4, S2/switch 4 should remain Off.

MEMORY SETTINGS FOR 0MB MICROFRAME 386CX MOTHERBOARD

MEM32	Total Memory	S1/1	S1/5	S1/6	S1/7	S1/8	S2/1	S2/2	S2/3	S2/4
4MB	4MB	On	Off	Off	Off	Off	On	Off	Off	Off
8MB	8MB	On	Off	On	Off	Off	On	Off	Off	Off

Note: S1/switches 2, 3, & 4 should remain Off.

MEMORY SETTINGS FOR 1MB OR 2MB MICROFRAME 386CX MOTHERBOARD

MEM32	Total Memory	S1/1	S1/5	S1/6	S1/7	S1/8	S2/1	S2/2	S2/3	S2/4
4MB	5MB	On	Off	Off	Off	Off	Off	On	Off	Off
8MB	9MB	On	Off	On	Off	Off	Off	On	Off	Off

Note:S1/switches 2, 3, & 4 should remain Off.

MEMORY SETTINGS FOR 4MB MICROFRAME 386CX MOTHERBOARD

MEM32	Total Memory	S1/1	S1/5	S1/6	S1/7	S1/8	S2/1	S2/2	S2/3	S2/4
4MB	5MB	On	Off	Off	Off	Off	Off	On	Off	Off
8MB	9MB	On	Off	On	Off	Off	Off	On	Off	Off

Note:S1/switches 2, 3, & 4 should remain Off.

MEMORY SETTINGS FOR 8MB MICROFRAME 386CX MOTHERBOARD

MEM32	Total Memory	S1/3	S1/5	S1/6	S1/7	S1/8	S2/1	S2/2	S2/3	S2/4
4MB	12MB	On	Off	Off	Off	Off	Off	On	Off	Off
8MB	16MB	On	Off	On	Off	Off	Off	On	Off	Off

Note:S1/switches 1, 2, & 4 should remain Off.