


MULTI-TECH SYSTEMS, INC. SPFC-A

Card Type Multi-I/O card
Chipset/Controller N/A
I/O Options Parallel port, serial ports (2), floppy-drive port
Maximum DRAM N/A

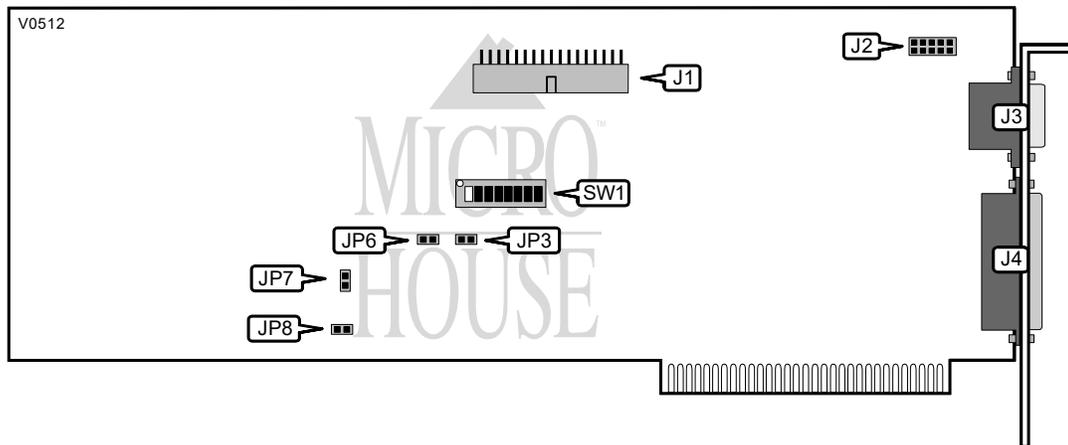

CONNECTIONS			
Purpose	Location	Purpose	Location
Floppy-drive port - internal	J1	Serial port 1 - external	J3
Serial port 2 - internal	J2	Parallel port	J4

SERIAL PORT 1 CONFIGURATION		
Port 1	SW1 1	SW1 3
COM1/3F8h	On	Off
COM3/3E8h	Off	On
Disabled	Off	Off

SERIAL PORT 2 CONFIGURATION		
Port 2	SW1 2	SW1 4
Disabled	Off	Off
COM2/2F8h	On	Off
COM4/3E0h	Off	On

Continued on next page . . .

MULTI-TECH SYSTEMS, INC.
 SPFC-A

... continued from previous page

PARALLEL PORT CONFIGURATION				
LPT Address/IRQ	SW1/5	SW1/6	SW1/7	SW1/8
LPT1/378h/IRQ7	On	Off	On	Off
LPT1/378h/IRQ5	On	Off	Off	On
LPT2/278h/IRQ7	Off	On	On	Off
LPT2/278h/IRQ5	Off	On	Off	On
Disabled	Off	Off	Off	Off

HARD DRIVE CONTROLLER	
Setting	JP3
Hard drive controller not present in system	Closed
Hard drive controller present in system	Open

FLOPPY DRIVE CONTROLLER			
Setting	P6	P7	P8
Enabled	Closed	Closed	Closed
Disabled	Open	Open	Open