

A. ADDRESS SETTING

PORT A	PORT B	378	278	3BC	208	218	228	238	248	258	268	318	338	358	398
JP2	JP11	1-2	1-2	1-2	1-2	1-2	1-2	2-3	2-3	2-3	2-3	2-3	2-3	2-3	2-3
JP3	JP12	1-2	1-2	1-2	2-3	2-3	2-3	1-2	1-2	1-2	1-2	2-3	2-3	2-3	2-3
JP4	JP13	1-2	1-2	2-3	1-2	1-2	2-3	1-2	1-2	2-3	2-3	1-2	1-2	2-3	2-3
JP5	JP14	1-2	2-3	1-2	1-2	2-3	1-2	1-2	2-3	1-2	2-3	1-2	2-3	1-2	2-3

B. PRINT MODE

PROT A	JP6	JP7	
PROT B	JP15	JP16	
	2-3	2-3	ECP
	2-3	1-2	EPP
	1-2	2-3	PS2
	1-2	1-2	SPP

C. IRQ SETTING

IRQ : 3,4,5,6,7,9,10,11,12,15


D. DMA CHANNEL (FOR ECP MODE ONLY)

PORT A	JP8		
PORT B	JP17		
	1-2	3-4	DMA CHANNEL 1
	5-6	7-8	DMA CHANNEL 2
	9-10	11-12	DMA CHANNEL 3

Megapower International Corp.

Room 403, No. 24, Wu-Chung 2nd Rd., Hsing Chium,
Taipei, Taiwan, R.O.C. Tel:886-2-22995172~4 Fax:886-2-22995134

LINK
PS2.SCH
PS3.SCH

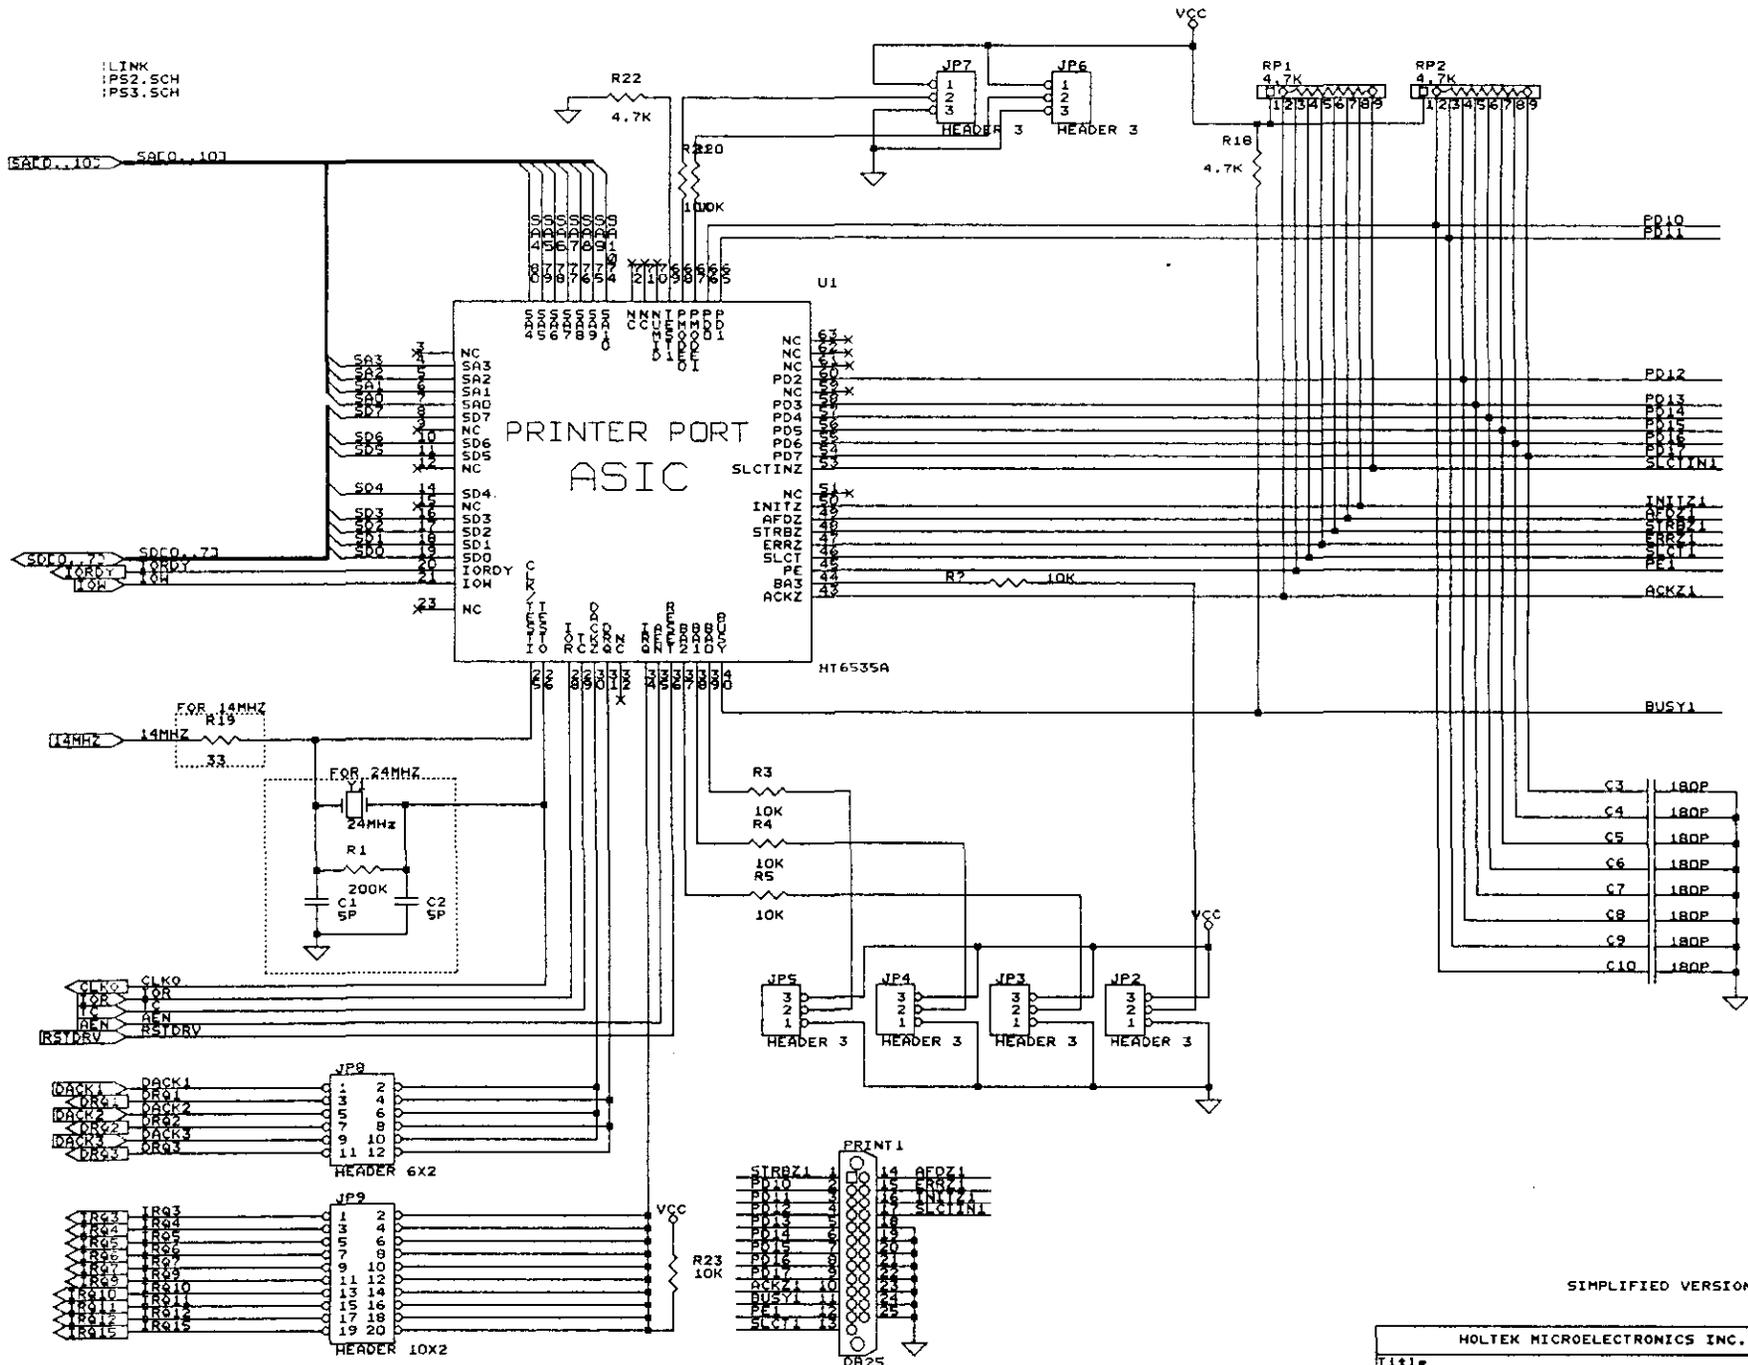

Parallel PORT 1

SIMPLIFIED VERSION

HOLTEK MICROELECTRONICS INC.		
Title HT6535A PARALLEL PORT 1		
Size Document Number D92-980105-1		
C	D92-980105-1	REV. 1.0
Date:	January 11, 1988 (M124)	

PRINTER PORT 1 JUMPER SETTINGS

JP8 :

1-2	3-4	DMA CHANNEL 1
5-6	7-8	DMA CHANNEL 2
9-10	11-12	DMA CHANNEL 3

JP9 :

1-2	IR0 3
3-4	IR0 4
5-6	IR0 5
7-8	IR0 6
9-10	IR0 7
11-12	IR0 9
13-14	IR0 10
15-16	IR0 11
17-18	IR0 12
19-20	IR0 15

JP2 JP3 JP4 JP5

1-2	1-2	1-2	1-2	378
1-2	1-2	1-2	2-3	278
1-2	1-2	2-3	1-2	38C
1-2	2-3	1-2	1-2	208
1-2	2-3	2-3	1-2	218
2-3	1-2	1-2	1-2	238
2-3	1-2	2-3	2-3	248
2-3	1-2	2-3	1-2	258
2-3	1-2	2-3	2-3	268
2-3	2-3	1-2	2-3	338
2-3	2-3	2-3	1-2	358
2-3	2-3	2-3	2-3	398

JP6 JP7

2-3	2-3	SPP
2-3	1-2	PS/2
1-2	2-3	EPP
1-2	1-2	ECP

PRINTER PORT 2 JUMPER SETTINGS

JP17 :

1-2	3-4	DMA CHANNEL 1
5-6	7-8	DMA CHANNEL 2
9-10	11-12	DMA CHANNEL 3

JP10 :


1-2	IR0 3
3-4	IR0 4
5-6	IR0 5
7-8	IR0 6
9-10	IR0 7
11-12	IR0 9
13-14	IR0 10
15-16	IR0 11
17-18	IR0 12
19-20	IR0 15

JP11 JP12 JP13 JP14

1-2	1-2	1-2	1-2	378
1-2	1-2	1-2	2-3	278
1-2	1-2	2-3	1-2	38C
1-2	2-3	1-2	1-2	208
1-2	2-3	1-2	2-3	218
1-2	2-3	2-3	1-2	228
2-3	1-2	1-2	1-2	238
2-3	1-2	2-3	2-3	248
2-3	1-2	2-3	1-2	258
2-3	1-2	2-3	2-3	268
2-3	2-3	1-2	2-3	318
2-3	2-3	2-3	1-2	338
2-3	2-3	2-3	2-3	358
2-3	2-3	2-3	2-3	398


JP15 JP16

2-3	2-3	SPP
1-2	1-2	PS/2
1-2	1-2	EPP
1-2	1-2	ECP

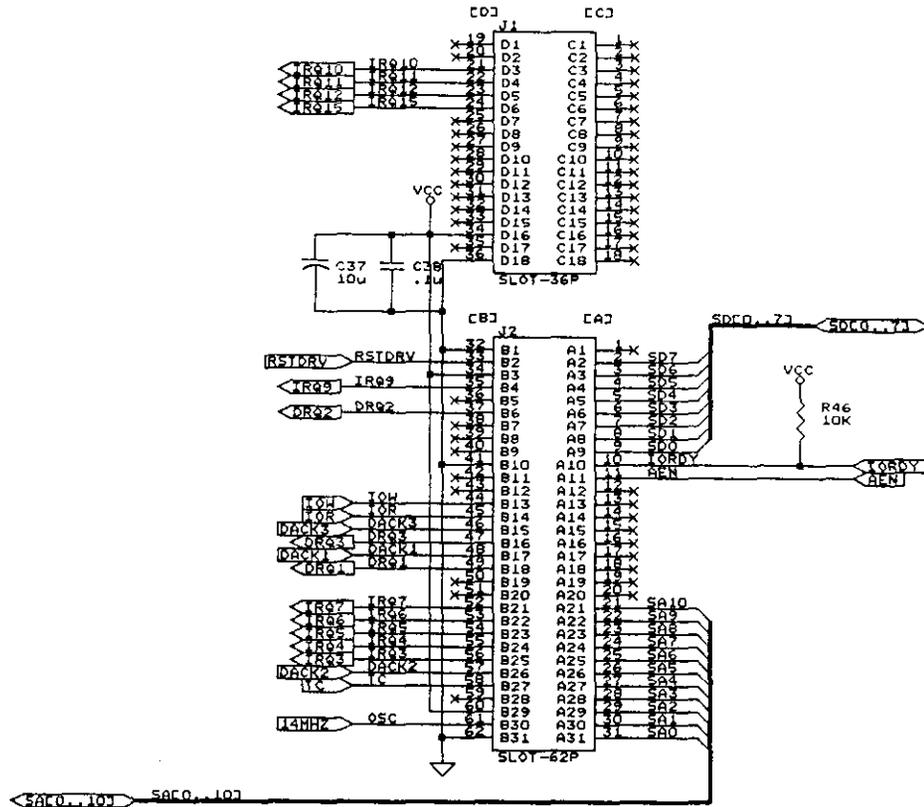

SIMPLIFIED VERSION

HOLTEK MICROELECTRONICS INC.	
Title	HT6535A ISA BUS
Size Document Number	REV
C	002 000100 1

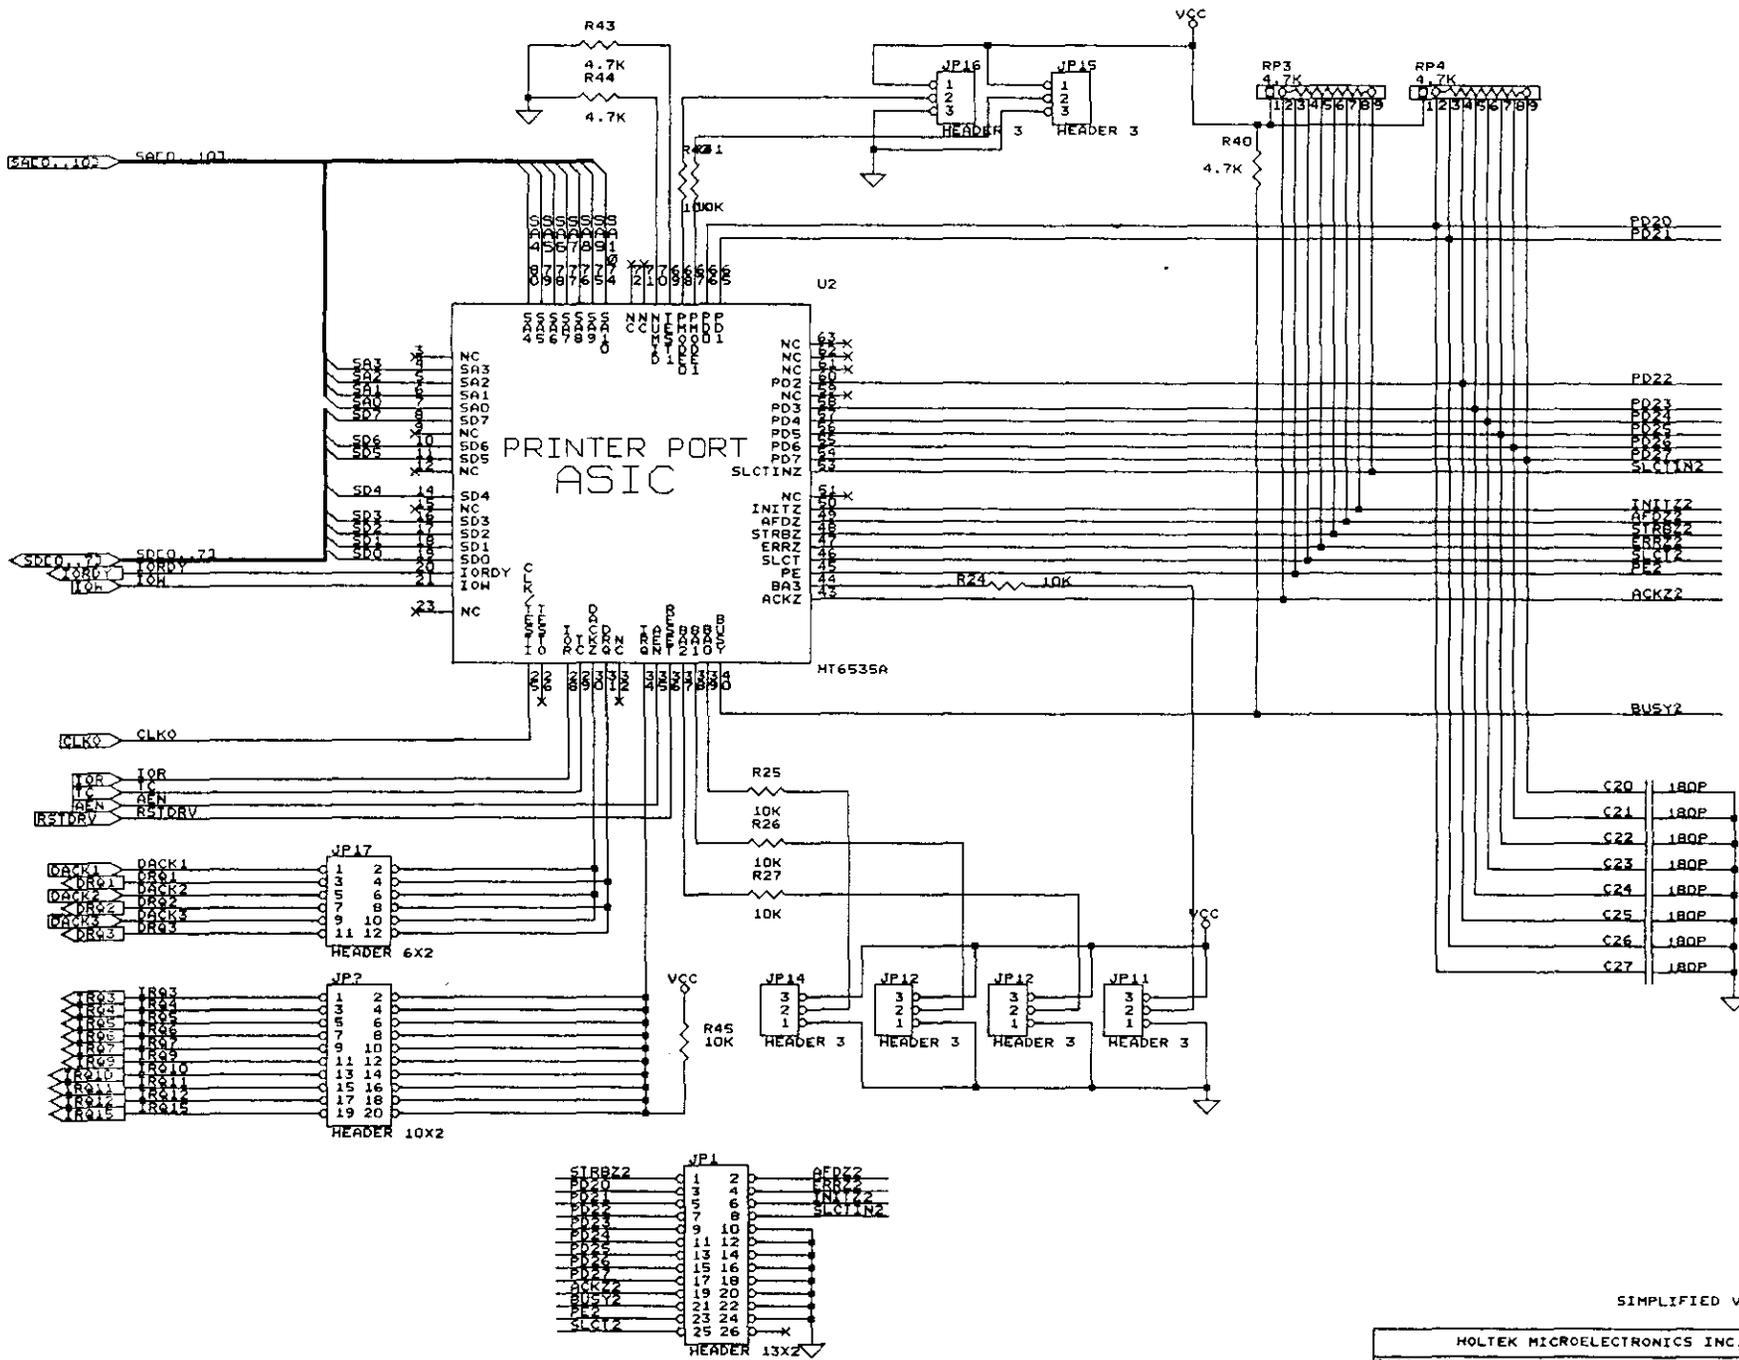

Parallel Port 2

SIMPLIFIED VERSION

HOLTEK MICROELECTRONICS INC.		
Title	HT6535A PARALLEL PORT 2	
Size Document Number	C D92-980105-1	
REV	1.0	