


PIXELWORKS, INC.  
 ULTRA CLIPPER GRAPHICS UA1280/V (2-SWITCH)

|                              |   |
|------------------------------|---|
| Category                     | Video   |
| Video Types Supported        | XVGA  |
| Video Processor              | Pixelworks, Inc.(exact location unidentified) |
| Highest Resolution Supported | 1280 x 1024                                   |
| Data Bus Type                | 16-bit ISA                                    |
| Memory Type                  | DRAM  |
| Maximum Onboard Memory       | 1.5MB   |

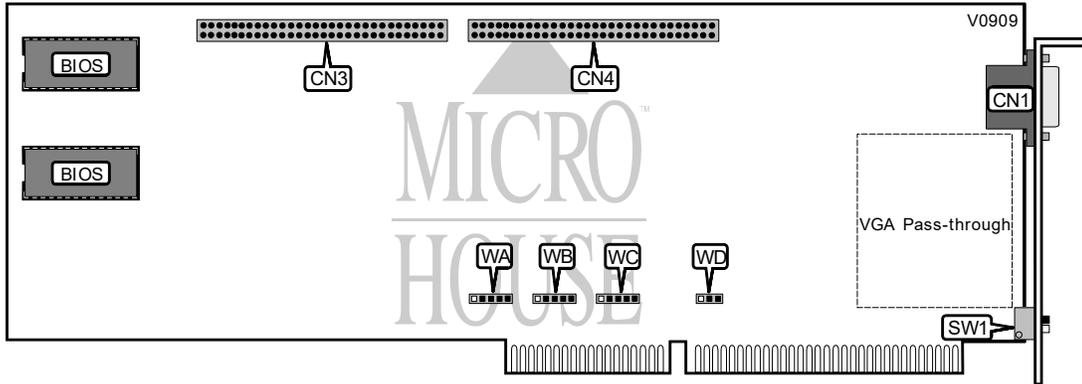

| CONNECTIONS              |          |                         |           |
|--------------------------|----------|-------------------------|-----------|
| Purpose                  | Location | Purpose                 | Location  |
| 15-pin analog video port | CN1      | Daughterboard connector | CN3 & CN4 |

| BASE I/O ADDRESS SELECTION |                   |
|----------------------------|-------------------|
| Address                    | WD                |
| 330h                       | Pins 1 & 2 closed |
| 340h                       | Pins 2 & 3 closed |

| DMA SELECTION |                   |                   |
|---------------|-------------------|-------------------|
| Channel       | WA                | WB                |
| 6             | Pins 1 & 2 closed | Pins 1 & 2 closed |
| 5             | Pins 4 & 5 closed | Pins 4 & 5 closed |
| 7             | Pins 2 & 3 closed | Pins 2 & 3 closed |

| INTERRUPT SELECTION |                   |
|---------------------|-------------------|
| IRQ                 | WC                |
| 10                  | Pins 1 & 2 closed |
| 11                  | Pins 2 & 3 closed |
| 12                  | Pins 4 & 5 closed |


Continued on next page. . .

PIXELWORKS, INC.  
 ULTRA CLIPPER GRAPHICS UA1280/V (2-SWITCH)

...continued from previous page

| CGA EMULATION CONFIGURATION |       |
|-----------------------------|-------|
| Setting                     | SW1/1 |
| Enabled                     | On    |
| Disabled                    | Off   |

| VGA PASS-THROUGH CONFIGURATION |       |
|--------------------------------|-------|
| Setting                        | SW1/2 |
| Enabled                        | On    |
| Disabled                       | Off   |



| CONNECTIONS           |          |
|-----------------------|----------|
| Purpose               | Location |
| VGA pass-through port | CN2      |

| MONITOR SYNC MODE SELECTION |       |       |       |       |
|-----------------------------|-------|-------|-------|-------|
| Mode                        | SW2/1 | SW2/2 | SW2/3 | SW2/4 |
| 3                           | On    | On    | Off   | Off   |
| 4                           | On    | Off   | Off   | Off   |
| 5                           | Off   | Off   | On    | Off   |