


# LAVA COMPUTER MANUFACTURING, INC. LAVA PARALLEL-ECP/EPP

Card Type	Parallel card
Chip Set	Unidentified
Maximum Onboard Memory	N/A
I/O Options	Parallel port
Hard Drives supported	None
Floppy drives supported	None
Data Bus	16-bit ISA
Card Size	Half-length, half-height

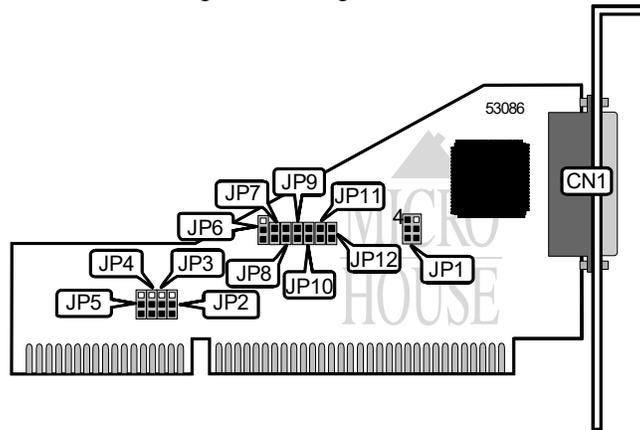

CONNECTIONS				
Function	Label	Function	Label	
Parallel port	CN1			

DMA CHANNEL SELECTION	
Channel	JP1
1	Pins 1 & 2, 4 & 5 closed
3	Pins 2 & 3, 5 & 6 closed

PARALLEL PORT INTERRUPT SELECTION								
Setting	JP2/ pins 1 & 2	JP2/ pins 2 & 3	JP3/ pins 1 & 2	JP3/ pins 2 & 3	JP4/ pins 1 & 2	JP4/ pins 2 & 3	JP5/ pins 1 & 2	JP5/ pins 2 & 3
IRQ2	Closed	Open						
IRQ3	Open	Closed	Open	Open	Open	Open	Open	Open
IRQ4	Open	Open	Closed	Open	Open	Open	Open	Open
IRQ5	Open	Open	Open	Closed	Open	Open	Open	Open
IRQ7	Open	Open	Open	Open	Closed	Open	Open	Open
IRQ10	Open	Open	Open	Open	Open	Closed	Open	Open
IRQ11	Open	Open	Open	Open	Open	Open	Closed	Open
IRQ12	Open	Closed						

Continued on next page . . .

# LAVA COMPUTER MANUFACTURING, INC.

## LAVA PARALLEL-ECP/EPP

. . . continued from previous page

PARALLEL PORT ADDRESS SELECTION							
Setting	JP6	JP7	JP8	JP9	JP10	JP11	JP12
3BCh	Pins 2 & 3	Closed	Open	Open	Open	Open	Open
378h	Pins 1 & 2	Open	Closed	Open	Open	Open	Open
278h	Pins 1 & 2	Open	Open	Closed	Open	Open	Open
238h	Pins 1 & 2	Open	Open	Open	Closed	Open	Open
2B8h	Pins 1 & 2	Open	Open	Open	Open	Closed	Open
338h	Pins 1 & 2	Open	Open	Open	Open	Open	Closed

Note: Designated pins should be in the closed position.