


SEA LEVEL SYSTEMS, INC.

SIO-104

| | |
|--------------------|------------------------------------|
| Card Type | Serial card |
| Chip Set | Unidentified |
| I/O Options | PC/104 connectors (2), serial port |
| Data Bus | Unidentified |

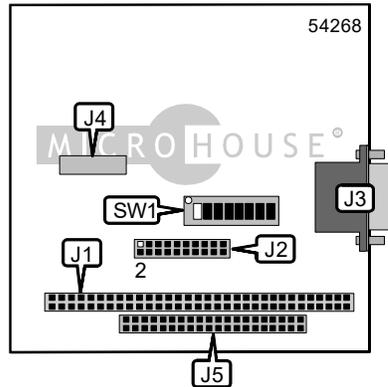

| CONNECTIONS | | | |
|------------------|-------|------------------|-------|
| Function | Label | Function | Label |
| PC/104 connector | J1 | PC/104 connector | J5 |
| Serial port | J3 | | |

| USER CONFIGURABLE SETTINGS | | | |
|-------------------------------------|--------|--------------|--|
| Function | Label | Position | |
| í Factory configured – do not alter | J4 | Unidentified | |
| í Factory configured – do not alter | SW 1/8 | Unidentified | |

| SERIAL PORT INTERRUPT SELECTION | |
|---------------------------------|---------------------|
| IRQ | J2 |
| 2/9 | Pins 1 & 2 closed |
| 3 | Pins 3 & 4 closed |
| í 4 | Pins 5 & 6 closed |
| 5 | Pins 7 & 8 closed |
| 7 | Pins 9 & 10 closed |
| 10 | Pins 11 & 12 closed |
| 11 | Pins 13 & 14 closed |
| 12 | Pins 15 & 16 closed |
| 15 | Pins 17 & 18 closed |
| R | Pins 19 & 20 closed |

Continued on next page. . .

SEA LEVEL SYSTEMS, INC.
SIO-104

... continued from previous page

| BASE I/O ADDRESS SELECTION | | | | | | | |
|----------------------------|-------|-------|-------|-------|-------|-------|-------|
| Setting | SW1/1 | SW1/2 | SW1/3 | SW1/4 | SW1/5 | SW1/6 | SW1/7 |
| 280 | Off | On | Off | On | On | On | On |
| 2A0 | Off | On | Off | On | Off | On | On |
| 2E8 | Off | On | Off | Off | Off | On | Off |
| 2F8 | Off | On | Off | Off | Off | Off | Off |
| 3E8 | Off | Off | Off | Off | Off | On | Off |
| 300 | Off | Off | On | On | On | On | On |
| 328 | Off | Off | On | On | Off | On | Off |
| i 3F8 | Off |