


DIALOGIC CORPORATION

D/42-NE2

Card Type	Voice processor card
Chip Set	Intel
Maximum Onboard Memory	Unidentified
I/O Options	RJ-14 ports (4), 26-pin PEB connector
Data Bus	16-bit ISA
Card Size	Full-length, full-height

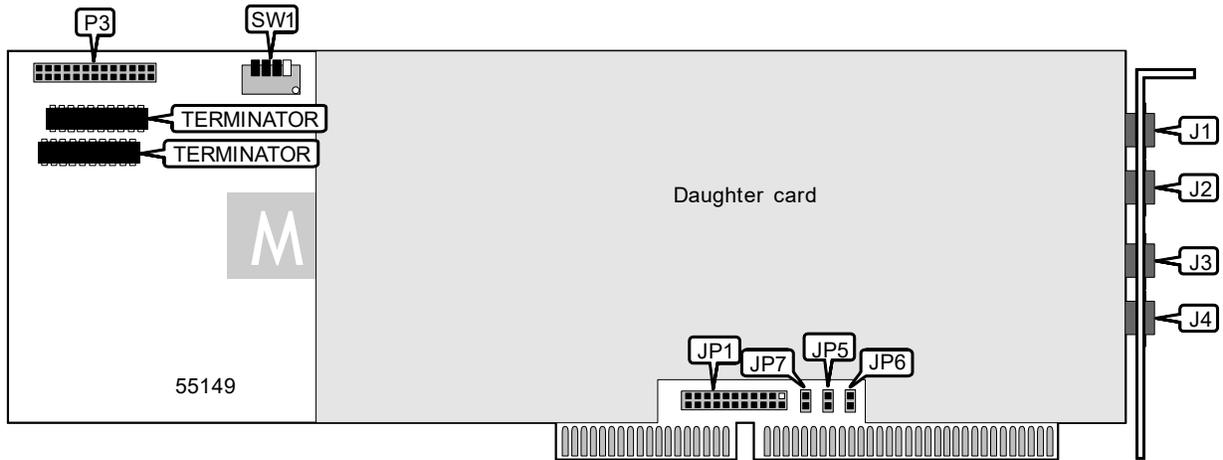

CONNECTIONS			
Function	Label	Function	Label
Channel 1 via RJ-14	J1	Channel 4 via RJ-14	J4
Channel 2 via RJ-14	J2	26-pin PEB connector	P3
Channel 3 via RJ-14	J3		

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
Interrupt settings for single board enabled	JP7	Closed	
Interrupt settings for multiple boards enabled	JP7	Open	
Hook switch set for on hook operation	SW1/4	Off	
Hook switch set to off hook operation	SW1/4	On	

BASE I/O ADDRESS SELECTION		
Setting	JP5	JP6
Interrupt D000h	Open	Open
A000h	Closed	Open
C000h	Open	Closed

Continued on next page...

DIALOGIC CORPORATION
D/42-NE2

...continued from previous page

OFFSET I/O ADDRESS SELECTION			
Setting	SW1/1	SW1/2	SW1/3
í 0000h	Off	Off	Off
2000h	Off	Off	On
4000h	Off	On	Off
6000h	Off	On	On
8000h	On	Off	Off
A000h	On	Off	On
C000h	On	On	Off
E000h	On	On	On

INTERRUPT SELECTION						
IRQ	JP1/Pins 1 & 2	JP1/Pins 3 & 4	JP1/Pins 5 & 6	JP1/Pins 7 & 8	JP1/Pins 9 & 10	JP1/Pins 11 & 12
í IRQ3	Open	Open	Open	Open	Open	Closed
IRQ4	Open	Open	Open	Open	Closed	Open
IRQ5	Open	Open	Open	Closed	Open	Open
IRQ6	Open	Open	Closed	Open	Open	Open
IRQ7	Open	Closed	Open	Open	Open	Open
IRQ9	Closed	Open	Open	Open	Open	Open
IRQ10	Open	Open	Open	Open	Open	Open
IRQ11	Open	Open	Open	Open	Open	Open
IRQ12	Open	Open	Open	Open	Open	Open
IRQ14	Open	Open	Open	Open	Open	Open
IRQ15	Open	Open	Open	Open	Open	Open

INTERRUPT SELECTION (CON'T)					
IRQ	JP1/Pins 13 & 14	JP1/Pins 15 & 16	JP1/Pins 17 & 18	JP1/Pins 19 & 20	JP1/Pins 21 & 22
í IRQ3	Open	Open	Open	Open	Open
IRQ4	Open	Open	Open	Open	Open
IRQ5	Open	Open	Open	Open	Open
IRQ6	Open	Open	Open	Open	Open
IRQ7	Open	Open	Open	Open	Open
IRQ9	Open	Open	Open	Open	Open
IRQ10	Closed	Open	Open	Open	Open
IRQ11	Open	Closed	Open	Open	Open
IRQ12	Open	Open	Closed	Open	Open
IRQ14	Open	Open	Open	Closed	Open
IRQ15	Open	Open	Open	Open	Closed