


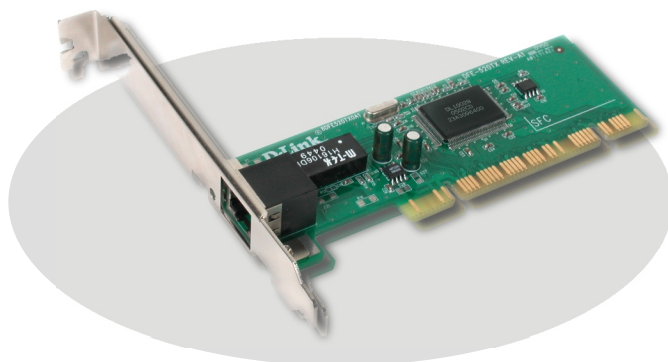

DFE-520TX

10/100Mbps Ethernet PCI Card for PC

The DFE-520TX is a very low-cost auto-sensing 10/100Mbps dual-speed network card installable in a PC equipped with PCI expansion slots. This card makes extensive use of the single-chip technology and is equipped with an on-board FIFO buffer, providing your computer with an easy and effective connection to an Ethernet network.

PCI Bus Master Performance

Plugged into your PC's PCI expansion bus, this network card is automatically configured by the PC BIOS. Supporting 32-bit Bus Master operation, the card provides a guaranteed performance for your networked PC. Bus Master transfers data directly between the card and the PC host, bypassing your computer host CPU to alleviate its workload. This allows your computer to concentrate on the application at hand, instead of the network operation task.

10/100Mbps Connection

The card's single RJ-45 connector connects to either 10BASE-T Ethernet or 100BASE-TX Fast Ethernet. 10/100Mbps speeds are auto-negotiated, completely without your need to intervene.

802.3x Flow Control for Secure Transmission

In the fast 200Mbps full-duplex mode, the card's embedded flow control provides a means to protect your data against possible loss during transmission on the network. When connected to a LAN switch that supports flow control, the card receives signals from the switch regarding buffer overrun during peak usage periods. The card then delays transmission until the switch is ready again to accept new data.

Key Features

- 802.3 10BASE-T/802.3u 100Base-TX standard
- Auto-detection of 10Mbps and 100Mbps network speeds
- Supports 802.1x function (MD5 only)
- 32-bit PCI Local Bus Master high-speed operation
- Full/half duplex operation
- Complies with Advanced Configuration and Power Interface specification v.1.0
- Complies with PCI Power Management v.1.1
- Supports 802.3x Flow Control
- Supports PCI clock speed up to 33Mhz independent of network clock
- On-board FIFO buffer; no external memory on host required
- Low Ethernet command processing overhead

DFE-520TX

Technical Specifications

10/100Mbps PCI Card

General

Standards

- IEEE 802.3 10BASE-T Ethernet
- IEEE 802.3u 100BASE-TX Fast Ethernet
- IEEE 802.3 NWay auto-negotiation
- IEEE 802.3x Flow Control
- PCI local bus 2.2 specification

Topology

Star

Protocol

CSMA/CD

Network Data Transfer Rates

- 10BASE-T:
 - 10Mbps (half-duplex)
 - 20Mbps (full-duplex)
- 100BASE-TX:
 - 100Mbps (half-duplex)
 - 200Mbps (full-duplex)

Network Cables

- 10BASE-T:
 - UTP Cat.3, 4, 5 (100 m max.)
 - EIA/TIA-568 STP (100 m max.)
- 100BASE-TX:
 - UTP Cat. 5 (100 m max.)
 - EIA/TIA-568 STP (100 m max.)

Diagnostic LED Report

- Link
- Activity

Physical & Environmental

Power Consumption

0.4 watts max.

Dimensions

120 x 20 mm

Weight

106 grams

Operating Temperature

0° to 40 °C

Storage Temperature

-10° to 70 °C

Operating Humidity

10% to 90% RH

Storage Humidity

5% to 90% RH

Emission

- FCC Class B
- CE Class B
- C-Tick

O.S. Driver Support

Microsoft Windows 98 SE, 2000, ME, XP



Ordering Information

DFE-520TX 10/100Mbps Ethernet PCI card

D-Link®

Specifications subject to change without prior notice.
D-Link is a registered trademark of D-Link Corporation/D-Link System Inc. All other trademarks belong to their proprietors.

U.S.A	TEL: 1-800-326-1688	FAX: 1-866-743-4905
Canada	TEL: 1-905-8295033	FAX: 1-905-8295223
Europe (U. K.)	TEL: 44-20-8731-5555	FAX: 44-20-8731-5511
Germany	TEL: 49-6196-77990	FAX: 49-6196-7799300
France	TEL: 33-1-30238688	FAX: 33-1-30238689
Netherlands	TEL: 31-10-282-1445	FAX: 31-10-282-1331
Belgium	TEL: 32(0)2-517-7111	FAX: 32(0)2-517-6500
Italy	TEL: 39-02-2900-0676	FAX: 39-02-2900-1723
Sweden	TEL: 46-(0)8564-61900	FAX: 46-(0)8564-61901
Denmark	TEL: 45-43-969040	FAX: 45-43-424347
Norway	TEL: 47-23-897189	FAX: 47-22-309085
Finland	TEL: 358-9-2707 5080	FAX: 358-9-2707-5081
Spain	TEL: 34-93-4090770	FAX: 34-93-4910795
Portugal	TEL: 351-21-8688493	
Czech Republic	TEL: 420-(603)-276-589	
Switzerland	TEL: 41-(0)-1-832-11-00	FAX: 41(0)-1-832-11-01
Greece	TEL: 30-210-9914 512	FAX: 30-210-9916902
Luxemburg	TEL: 32-(0)2-517-7111	FAX: 32-(0)2-517-6500
Poland	TEL: 48-(0)-22-583-92-75	FAX: 48-(0)-22-583-92-76
Hungary	TEL: 36-(0)-1-461-30-00	FAX: 36-(0)-1-461-30-09
Singapore	TEL: 65-6774-6233	FAX: 65-6774-6322
Australia	TEL: 61-2-8899-1800	FAX: 61-2-8899-1868
India	TEL: 91-022-26526696	FAX: 91-022-26528914
Middle East (Dubai)	TEL: 971-4-3916480	FAX: 971-4-3908881
Turkey	TEL: 90-212-289-56-59	FAX: 90-212-289-76-06
Egypt	TEL: 202-414-4295	FAX: 202-415-6704
Israel	TEL: 972-9-9715700	FAX: 972-9-9715601
Latin America	TEL: 56-2-232-3185	FAX: 56-2-232-0923
Brazil	TEL: 55-11-218-59300	FAX: 55-11-218-59322
South Africa	TEL: 27-12-665-2165	FAX: 27-12-665-2186
Russia	TEL: 7-095-744-0099	FAX: 7-095-744-0099 #350
China	TEL: 86-10-58635800	FAX: 86-10-58635799
Taiwan	TEL: 886-2-2910-2626	FAX: 886-2-2910-1515
Headquarters	TEL: 886-2-2916-1600	FAX: 886-2-2914-6299