


EVERSOURCE COMPUTERS, INC.

HT18 386SX

Processor	80386SX
Processor Speed	16/20/25MHz
Chip Set	Headland
Max. Onboard DRAM	8MB
Cache	None
BIOS	AMI
Dimensions	220mm x 220mm
I/O Options	None
NPU Options	80387SX

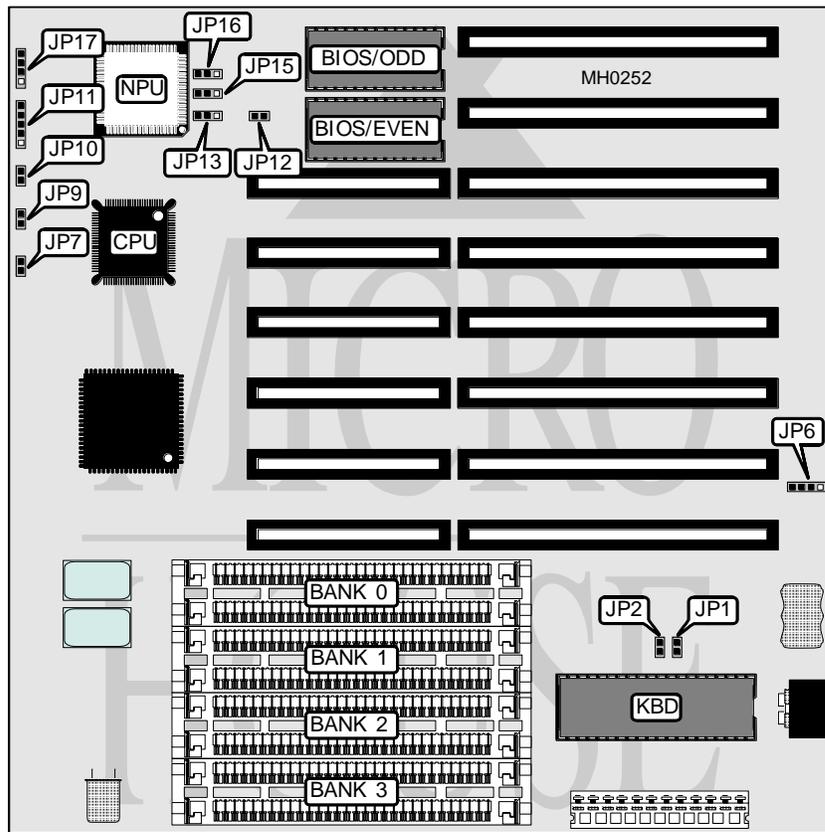

CONNECTIONS			
Purpose	Location	Purpose	Location
Turbo button	JP2	Turbo switch	JP10
External battery	JP6	Power LED & keylock	JP11
Reset switch	JP7	Speaker	JP17
Turbo LED	JP9		

Continued on next page . . .

EVERSOURCE COMPUTERS, INC.
HT18 386SX

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select color	JP1	Closed
Monitor type select monochrome	JP1	Open

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
512KB	(2) 256K x 9	NONE	NONE	NONE
1MB	(2) 256K x 9	(2) 256K x 9	NONE	NONE
1.5MB	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9	NONE
2MB	(2) 256K x 9			
2MB	(2) 1M x 9	NONE	NONE	NONE
3MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	NONE
4MB	(2) 1M x 9	(2) 1M x 9	NONE	NONE
4.5MB	(2) 256K x 9	(2) 1M x 9	(2) 1M x 9	NONE
5MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	(2) 1M x 9
6MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	NONE
8MB	(2) 1M x 9			

PIPELINE MODE CONFIGURATION				
Size	JP12	JP13	JP15	JP16
Disabled	Open	pins 1 & 2 closed	pins 2 & 3 closed	pins 1 & 2 closed
Enabled	Closed	pins 2 & 3 closed	pins 1 & 2 closed	pins 2 & 3 closed