


NOVACOR, INC.

OPTIMUM 486-25/33

Processor	80486DX
Processor Speed	25/33MHz
Chip Set	OPTI
Max. Onboard DRAM	32MB
Cache	None
BIOS	AMI/MR
Dimensions	330mm x 218mm
I/O Options	32-bit external memory card, 32-bit external cache card
NPU Options	4167

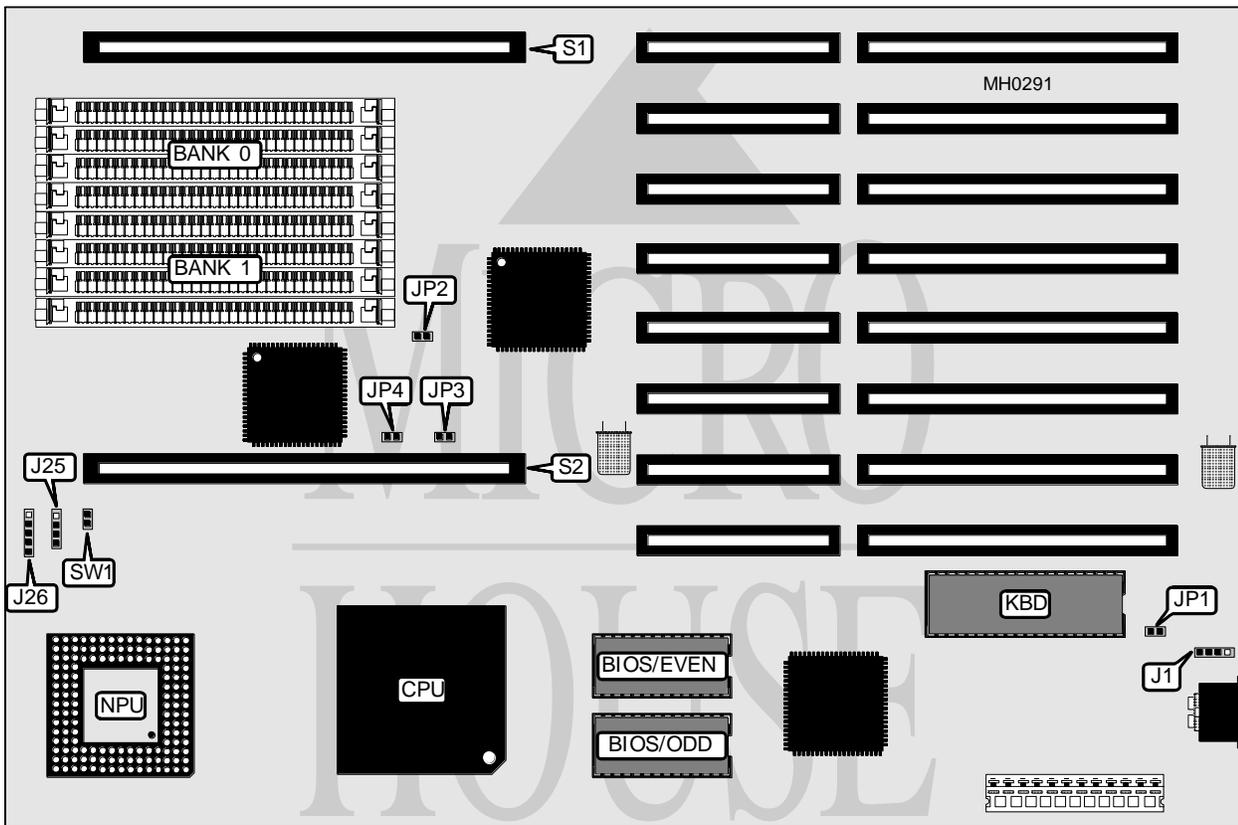

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J1	32-bit external memory card	S1
Speaker	J25	32-bit external cache card	S2
Power LED & keylock	J26	Reset switch	SW1

Continued on next page . . .

NOVACOR, INC.

OPTIMUM 486-25/33

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select color (AMI BIOS)	JP1	Closed
Monitor type select monochrome (AMI BIOS)	JP1	Open
í Password enabled (MR BIOS)	JP1	Closed
Password disabled (MR BIOS)	JP1	Open
í Factory configured - do not alter	JP2	N/A
í Factory configured - do not alter	JP3	N/A
í Factory configured - do not alter	JP4	N/A

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
5MB	(4) 256K x 9	(4) 1M x 9
8MB	(4) 1M x 9	(4) 1M x 9