


UNIDENTIFIED INTEL P 9

Processor	80386SX
Processor Speed	16/20MHz
Chip Set	Intel
Max. Onboard DRAM	8MB
Cache	64KB
BIOS	AMI
Dimensions	330mm x 218mm
I/O Options	None
NPU Options	80387SX

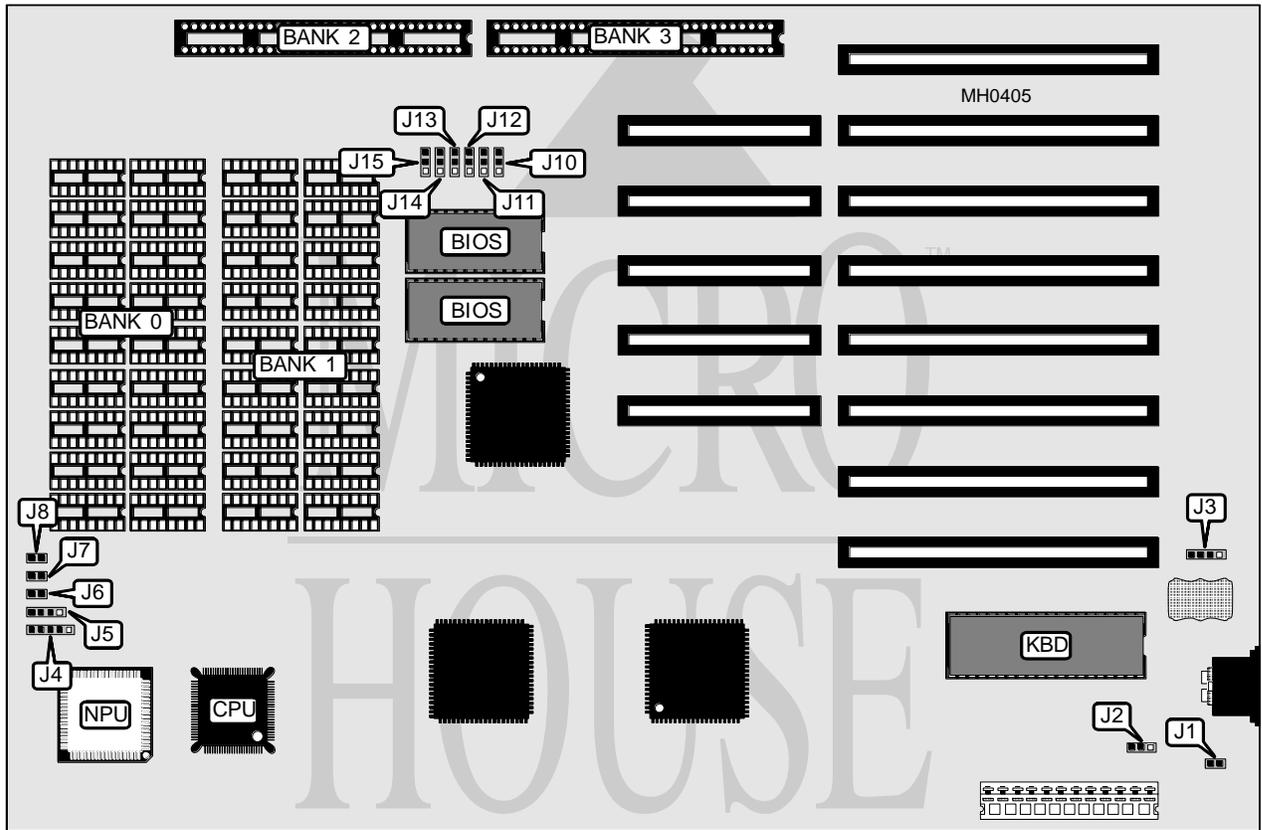

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J3	Turbo LED	J6
Power LED & Keylock	J4	Turbo switch	J7
Speaker	J5	Reset switch	J8

Continued on next page . . .

UNIDENTIFIED INTEL P9

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select color	J1	Closed
Monitor type select monochrome	J1	Open
í Battery select internal	J2	pins 1 & 2 closed
Battery select external	J2	pins 2 & 3 closed

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
512KB	(18) 44256	NONE	NONE	NONE
512KB	NONE	NONE	(2) 256K x 9	NONE
1MB	(18) 44256	(18) 44256	NONE	NONE
1MB	NONE	NONE	(2) 256K x 9	(2) 256K x 9
2MB	(18) 44256	(18) 44256	(2) 256K x 9	(2) 256K x 9
2MB	(18) 411000	NONE	NONE	NONE
2MB	NONE	NONE	(2) 1M x 9	NONE
4MB	(18) 411000	(18) 411000	NONE	NONE
4MB	NONE	NONE	(2) 1M x 9	(2) 1M x 9
8MB	(18) 411000	(18) 411000	(2) 1M x 9	(2) 1M x 9

DRAM JUMPER CONFIGURATION						
Size	J10	J11	J12	J13	J14	J15
512KB	2 & 3	2 & 3	2 & 3	2 & 3	2 & 3	2 & 3
512KB	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2
1MB	2 & 3	2 & 3	2 & 3	2 & 3	2 & 3	2 & 3
1MB	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2
2MB	2 & 3	2 & 3	2 & 3	2 & 3	2 & 3	2 & 3
2MB	2 & 3	2 & 3	2 & 3	2 & 3	2 & 3	2 & 3
2MB	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2
4MB	2 & 3	2 & 3	2 & 3	2 & 3	2 & 3	2 & 3
4MB	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2
8MB	2 & 3	2 & 3	2 & 3	2 & 3	2 & 3	2 & 3

Note: Pins designated should be in the closed position.