


# CYBLE TECHNOLOGY, INC.

## C-301V2

<b>Processor</b>	80286
<b>Processor Speed</b>	12MHz
<b>Chip Set</b>	Unidentified
<b>Max. Onboard DRAM</b>	4MB
<b>Cache</b>	None
<b>BIOS</b>	AMI
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	None
<b>NPU Options</b>	80287

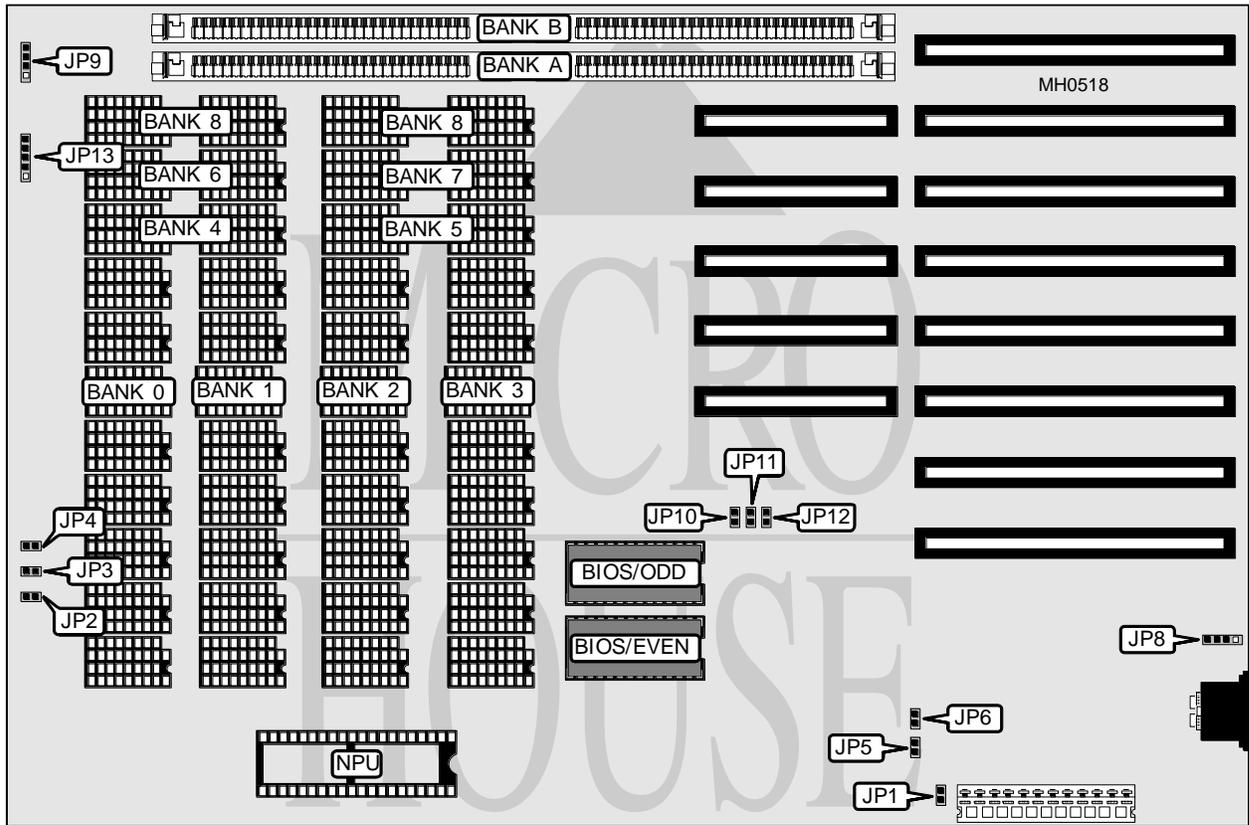

CONNECTIONS			
Purpose	Location	Purpose	Location
Reset switch	JP1	External battery	JP8
Turbo switch	JP3	Speaker	JP9
Turbo LED	JP4	Power LED & keylock	JP13

Continued on next page . . .

**CYBLE TECHNOLOGY, INC.**  
**C - 3 0 1 V 2**

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Location
í Clock speed select 8MHz	JP2	Closed
Clock speed select 6MHz	JP2	Open
í Monitor type select color	JP5	Closed
Monitor type select monochrome	JP5	Open
í Wait states select 0	JP6	Closed
Wait state select 1	JP6	Open

DRAM CONFIGURATION (DIP)				
Size	Bank 0	Bank 1	Bank 2	Bank 3
512KB	NONE	NONE	(8) 41256	(8) 41256
512KB	NONE	NONE	NONE	NONE
512KB	NONE	NONE	NONE	NONE
640KB	(8) 4164	(8) 4164	(8) 41256	(8) 41256
640KB	(8) 4164	(8) 4164	NONE	NONE
640KB	(8) 4164	(8) 4164	NONE	NONE
1MB	(8) 41256	(8) 41256	(8) 41256	(8) 41256
1MB	NONE	NONE	NONE	NONE
1MB	NONE	NONE	NONE	NONE
2MB	NONE	NONE	(8) 411000	(8) 411000
2MB	NONE	NONE	NONE	NONE
4MB	(8) 411000	(8) 411000	(8) 411000	(8) 411000
4MB	NONE	NONE	NONE	NONE

DRAM PARITY CONFIGURATION (DIP)					
Size	Bank 4	Bank 5	Bank 6	Bank 7	Bank 8
512KB	NONE	(2) 41256	NONE	NONE	NONE
512KB	NONE	(2) 41256	(2) 44256	(2) 44256	NONE
512KB	NONE	NONE	NONE	NONE	NONE
640KB	(2) 4164	(2) 41256	NONE	NONE	NONE
640KB	(2) 4164	(2) 41256	(2) 44256	(2) 44256	NONE
640KB	(2) 4164	NONE	NONE	NONE	NONE
1MB	(2) 41256	(2) 41256	NONE	NONE	NONE
1MB	(2) 41256	(2) 41256	(2) 44256	(2) 44256	(2) 44256
1MB	NONE	NONE	NONE	NONE	NONE
2MB	NONE	(2) 411000	NONE	NONE	NONE
2MB	NONE	NONE	NONE	NONE	NONE
4MB	(2) 411000	(2) 411000	NONE	NONE	NONE
4MB	NONE	NONE	NONE	NONE	NONE

Continued on next page . . .

**CYBLE TECHNOLOGY, INC.**  
**C-301V2**

... continued from previous page

DRAM CONFIGURATION (SIMM)		
Size	Bank A	Bank B
512KB	(2) 256K x 9	NONE
1MB	(2) 256K x 9	(2) 256K x 9
2MB	(2) 1M x 9	NONE
4MB	(2) 1M x 9	(2) 1M x 9

DRAM JUMPER CONFIGURATION			
Size	JP10	JP11	JP12
512KB	Closed	Closed	Closed
640KB	Open	Closed	Closed
1MB	Closed	Open	Closed
2MB	Open	Open	Closed
4MB	Closed	Closed	Open