


UNIDENTIFIED ZERO WAIT HAM/12-TI

Processor 80286
Processor Speed 12MHz
Chip Set TI
Max. Onboard DRAM 4MB
Cache None
BIOS AMI/Award/Phoenix
Dimensions 271mm x 218mm
I/O Options None
NPU Options 80287

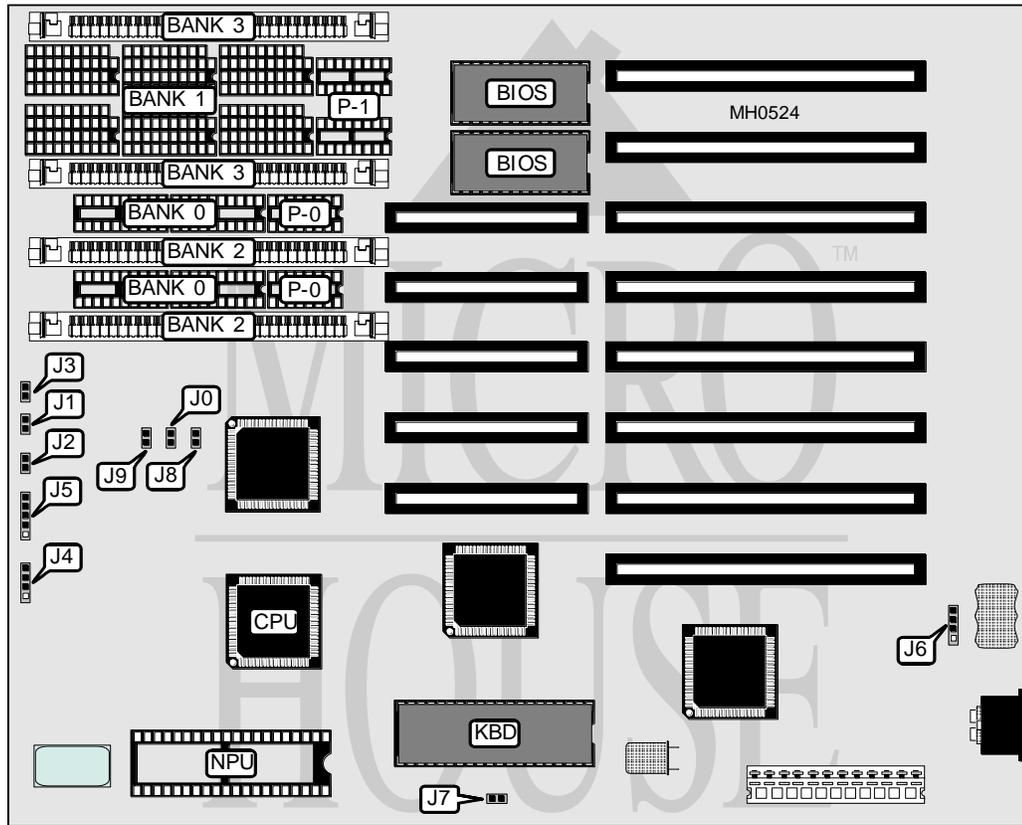

CONNECTIONS			
Purpose	Location	Purpose	Location
Turbo switch	J1	Speaker	J4
Turbo LED	J2	Power LED & keylock	J5
Reset switch	J3	External battery	J6

Continued on next page . . .

UNIDENTIFIED

ZERO WAIT HAM/12-TI

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select color	J7	Closed
Monitor type select monochrome	J7	Open
í Wait state select 0	J8	Closed
Wait state select 1	J8	Open
í Parity check enabled	J9	Open
Parity check disabled	J9	Closed
í DRAM type select 256K	J0	Closed
DRAM type select 1M	J0	Open

DRAM CONFIGURATION						
Size	Bank 0	Bank 1	P-0	P-1	Bank 2	Bank 3
512KB	(4) 44256	NONE	(2) 41256	NONE	NONE	NONE
512KB	NONE	NONE	NONE	NONE	(2) 256K x 9	NONE
640KB	(4) 44256	(4) 4464	(2) 41256	(2) 4164	NONE	NONE
1MB	(4) 44256	(4) 44256	(2) 41256	(2) 41256	NONE	NONE
1MB	NONE	NONE	NONE	NONE	(2) 256K x 9	(2) 256K x 9
2MB	NONE	NONE	NONE	NONE	(2) 1M x 9	NONE
4MB	NONE	NONE	NONE	NONE	(2) 1M x 9	(2) 1M x 9