


UNIDENTIFIED SUPER 386

Processor	80386DX
Processor Speed	16/20MHz
Chip Set	C & T
Max. Onboard DRAM	8MB
Cache	None
BIOS	AMI
Dimensions	330mm x 218mm
I/O Options	32-bit external cache connector, 32-bit external memory card slot
NPU Options	80387/3167

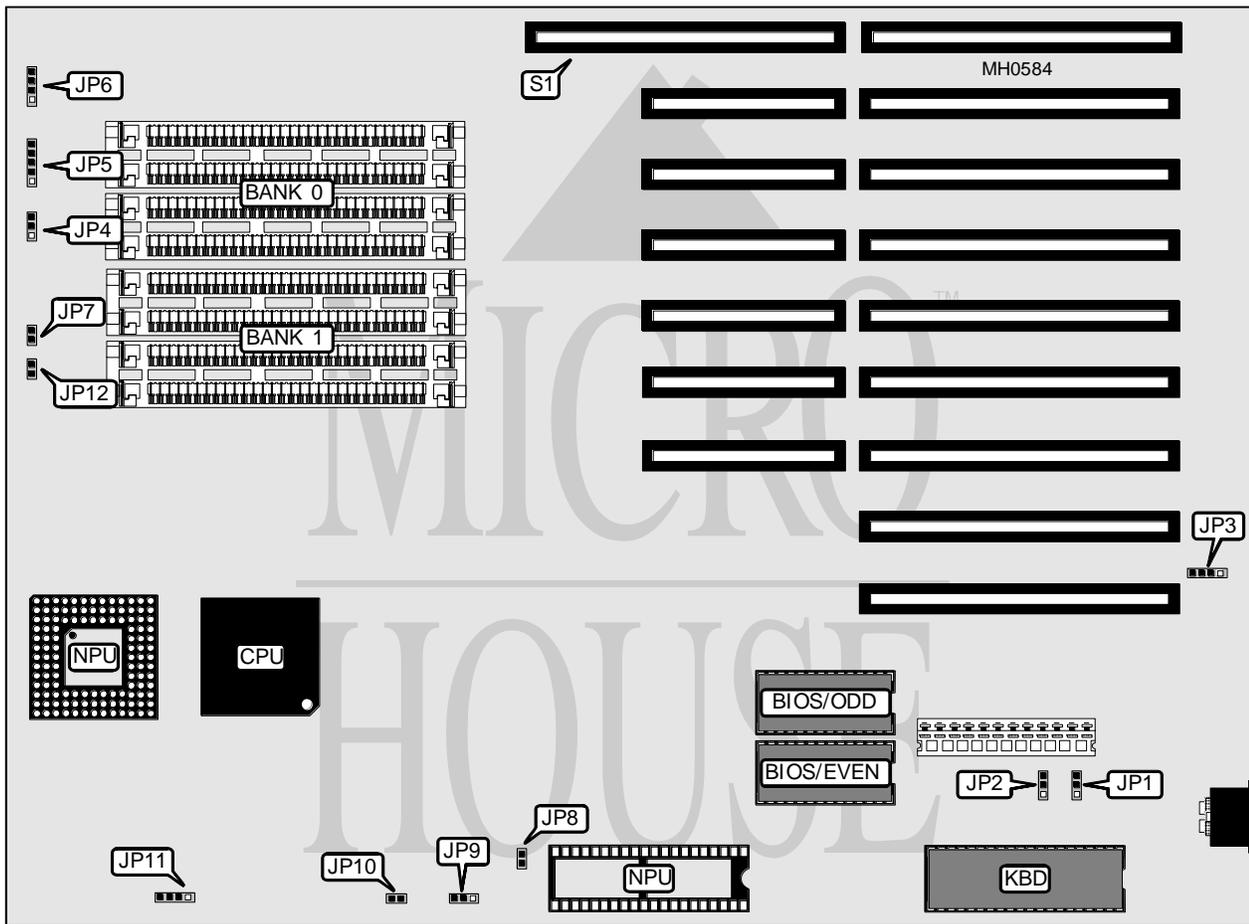

CONNECTIONS

Purpose	Location	Purpose	Location
External battery	JP3	Proprietary external cache	JP11
Power LED & keylock	JP5	Reset switch	JP12
Speaker	JP6	32-bit external memory card	S1
Turbo LED	JP7		

Continued on next page . . .

UNIDENTIFIED SUPER 386

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í CPU speed switchable from keyboard	JP1	pins 1 & 2 closed
í Monitor type select color	JP2	pins 1 & 2 closed
Monitor type select monochrome	JP2	pins 2 & 3 closed
í CMOS memory normal operation (internal battery)	JP3	pins 1 & 2 closed
CMOS memory normal operation (external battery)	JP3	Closed
CMOS memory clear	JP3	pins 3 & 4 closed
í CPU type select 20MHz/25MHz/33MHz	JP4	pins 1 & 2 closed
í CPU type select 16MHz	JP4	pins 1 & 2 closed
Factory configured - do not alter	JP8	N/A

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
2MB	(4) 256K x 9	(4) 256K x 9
8MB	(4) 1M x 9	(4) 1M x 9
Note: The location of Bank 0 is unidentified.		

NPU CONFIGURATION		
Type	JP9	JP10
Disabled	pins 1 & 2 closed	Open
80287	pins 1 & 2 closed	Closed
80387	pins 2 & 3 closed	Closed