


**EVEREX SYSTEMS, INC.**  
**STEP 286/20 (EV-1820)**

<b>Processor</b>	80286
<b>Processor Speed</b>	20MHz
<b>Chip Set</b>	Everex
<b>Max. Onboard DRAM</b>	4MB
<b>SRAM Cache</b>	32/64/128KB
<b>BIOS</b>	Everex
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	32-bit external memory card slot
<b>NPU Options</b>	80287

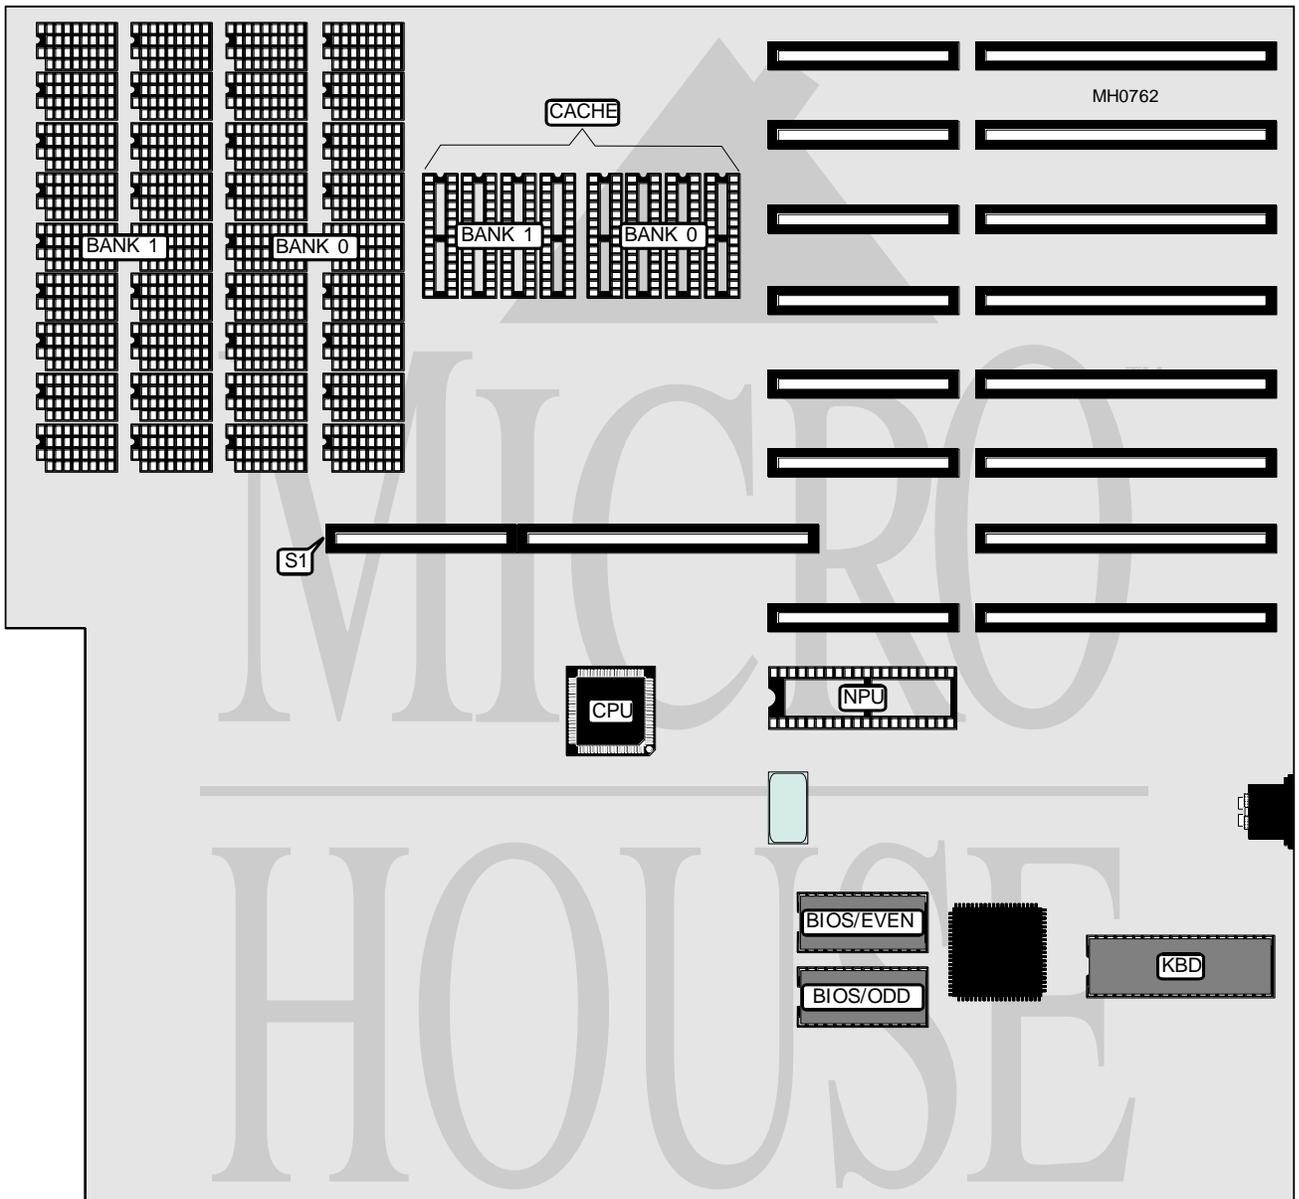

*Continued on next page . . .*

**EVEREX SYSTEMS, INC.**  
**STEP 286/20 (EV-1820)**

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
External memory card slot	S1		

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
512KB	(18) 41256	NONE	NONE	NONE
1MB	(18) 41256	(18) 41256	NONE	NONE
2MB	(18) 41256	(18) 41256	(18) 41256	(18) 41256
2MB	(18) 411000	NONE	NONE	NONE
4MB	(18) 411000	(18) 411000	NONE	NONE
8MB	(18) 411000	(18) 411000	(18) 411000	(18) 411000

Note: Banks 2 and 3 are utilized when a 32-bit external memory card is installed at S1.

SRAM CONFIGURATION		
Size	Cache SRAM	Location
32KB	(4) 8K x 8	Bank 0
64KB	(8) 8K x 8	Banks 0 & 1
128KB	(4) 32K x 8	Bank 0