


# EVEREX SYSTEMS, INC.

## TEMPO 486SX/20 (EV-18133)

<b>Processor</b>	80486SX/80487SX/80486DX
<b>Processor Speed</b>	25/33MHz
<b>Chip Set</b>	Everex
<b>Max. Onboard DRAM</b>	32MB
<b>Cache</b>	128KB
<b>BIOS</b>	Everex
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	None
<b>NPU Options</b>	None

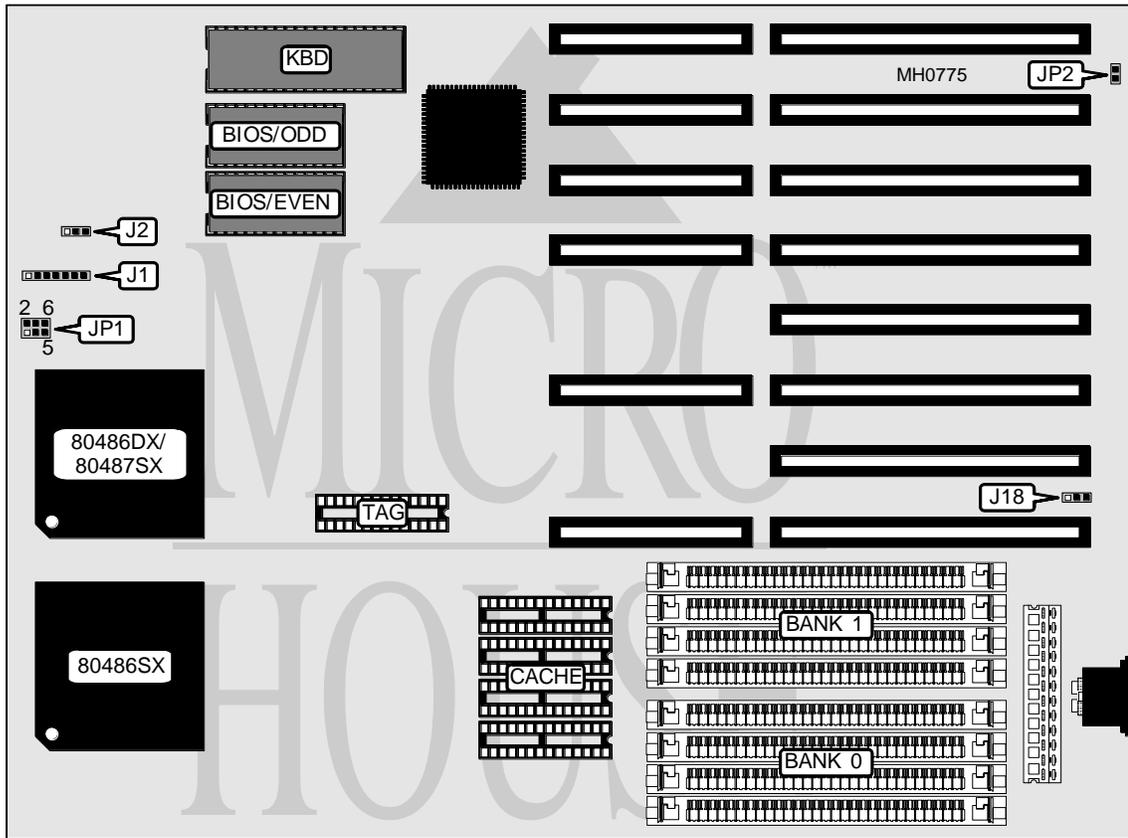

CONNECTIONS			
Purpose	Location	Purpose	Location
Front panel LED	J1	External battery	J18
Speaker	J2		

Continued on next page . . .

**EVEREX SYSTEMS, INC.**  
**TEMPO 486SX/20 (EV-18133)**

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í NPU disabled	JP1	Closed
NPU enabled	JP1	pins 1 & 2, 3 & 4, 5 & 6 closed
í Monitor type select color	JP2	Closed
Monitor type select monochrome	JP2	Open

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
5MB	(4) 1M x 9	(4) 256K x 9
5MB	(4) 256K x 9	(4) 1M x 9
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
17MB	(4) 4M x 9	(4) 256K x 9
17MB	(4) 256K x 9	(4) 4M x 9
20MB	(4) 4M x 9	(4) 1M x 9
20MB	(4) 1M x 9	(4) 4M x 9
32MB	(4) 4M x 9	(4) 4M x 9