


# EVEREX SYSTEMS, INC.

## AGI METRO 486DX/33 (EV-18202)

**Processor** 80486DX  
**Processor Speed** 33MHz  
**Chip Set** C & T/Suntac  
**Max. onboard DRAM** 32MB  
**Cache** 32/128KB  
**BIOS** AMI  
**Dimensions** 220mm x 330mm  
**I/O Options** None  
**NPU Options** 4167

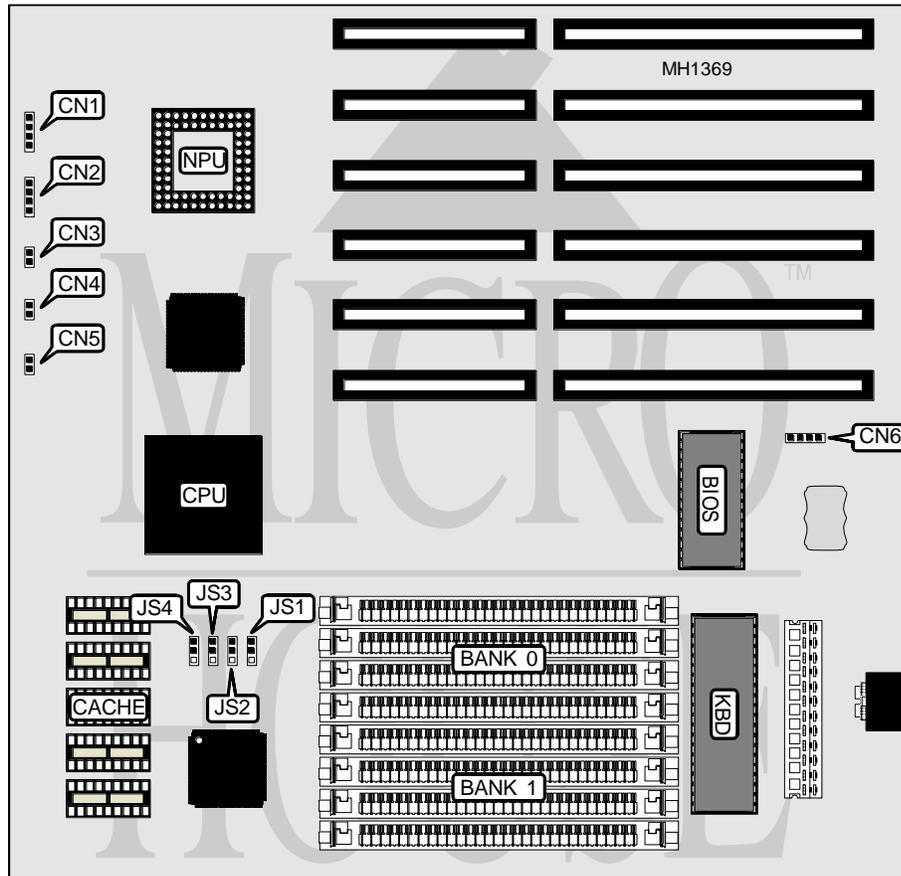

| CONNECTIONS |          |                  |          |
|-------------|----------|------------------|----------|
| Purpose     | Location | Purpose          | Location |
| Keylock     | CN1      | Turbo switch     | CN4      |
| Speaker     | CN2      | Turbo LED        | CN5      |
| Reset       | CN3      | External battery | CN6      |

Continued on next page . . .

## EVEREX SYSTEMS, INC.

## AGI METRO 486DX/33 (EV-18202)

... continued from previous page

| DRAM CONFIGURATION |              |              |
|--------------------|--------------|--------------|
| Size               | Bank 0       | Bank 1       |
| 1MB                | (4) 256K x 9 | NONE         |
| 2MB                | (4) 256K x 9 | (4) 256K x 9 |
| 4MB                | (4) 1M x 9   | NONE         |
| 5MB                | (4) 1M x 9   | (4) 256K x 9 |
| 8MB                | (4) 1M x 9   | (4) 1M x 9   |
| 16MB               | (4) 4M x 9   | NONE         |
| 17MB               | (4) 4M x 9   | (4) 256K x 9 |
| 20MB               | (4) 4M x 9   | (4) 1M x 9   |
| 32MB               | (4) 4M x 9   | (4) 4M x 9   |

| CACHE CONFIGURATION |             |                   |
|---------------------|-------------|-------------------|
| Size                | Cache       | JS1 - JS4         |
| 32KB                | (5) 8K x 8  | pins 1 & 2 closed |
| 128KB               | (5) 32K x 8 | pins 2 & 3 closed |