


EVEREX SYSTEMS, INC.
AGI METRO 386DX/33 EV-18205

Processor 80386DX
Processor Speed 33MHz
Chip Set C & T/Suntac
Max. onboard DRAM 32MB
Cache 32/128KB
BIOS AMI
Dimensions 220mm x 220mm
I/O Options None
NPU Options 80387DX

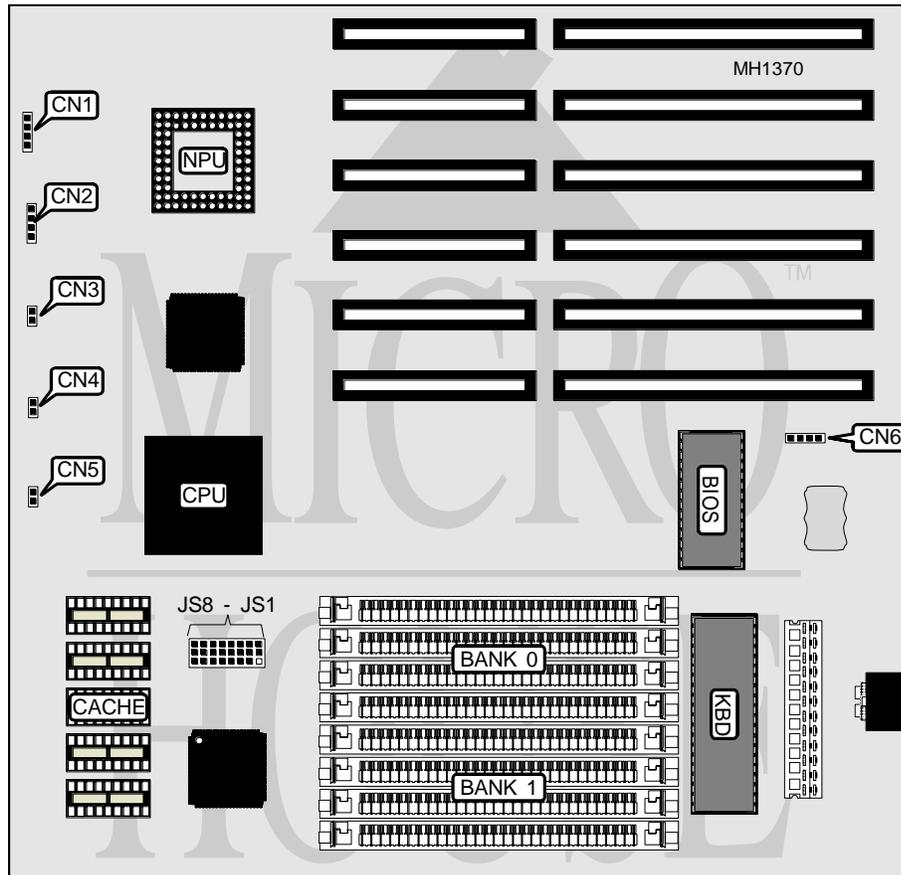

CONNECTIONS			
Purpose	Location	Purpose	Location
Keylock	CN1	Turbo switch	CN4
Speaker	CN2	Turbo LED	CN5
Reset	CN3	External battery	CN6

Continued on next page . . .

EVEREX SYSTEMS, INC.
AGI METRO 386DX/33 EV-18205

... continued from previous page

CACHE CONFIGURATION		
Size	Cache	TAG
32KB	(4) 8K x 8	(1) 8K x 8
128KB	(4) 32K x 8	(1) 32K x 8

Note: Exact location of Tag RAM is unknown.

CACHE JUMPER CONFIGURATION	
Size	JS1 - JS8
32KB	pins 1 & 2
128KB	pins 2 & 3

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
5MB	(4) 1M x 9	(4) 256K x 9
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
17MB	(4) 4M x 9	(4) 256K x 9
20MB	(4) 4M x 9	(4) 1M x 9
32MB	(4) 4M x 9	(4) 4M x 9