


UNIDENTIFIED

ELT 386B-200B

Processor	80386DX
Processor Speed	16MHz
Chip Set	C & T
Max. onboard DRAM	16MB
SRAM Cache	None
BIOS	AMI
Dimensions	330mm x 218mm
I/O Options	32-bit proprietary memory card
NPU Options	80287/80387DX

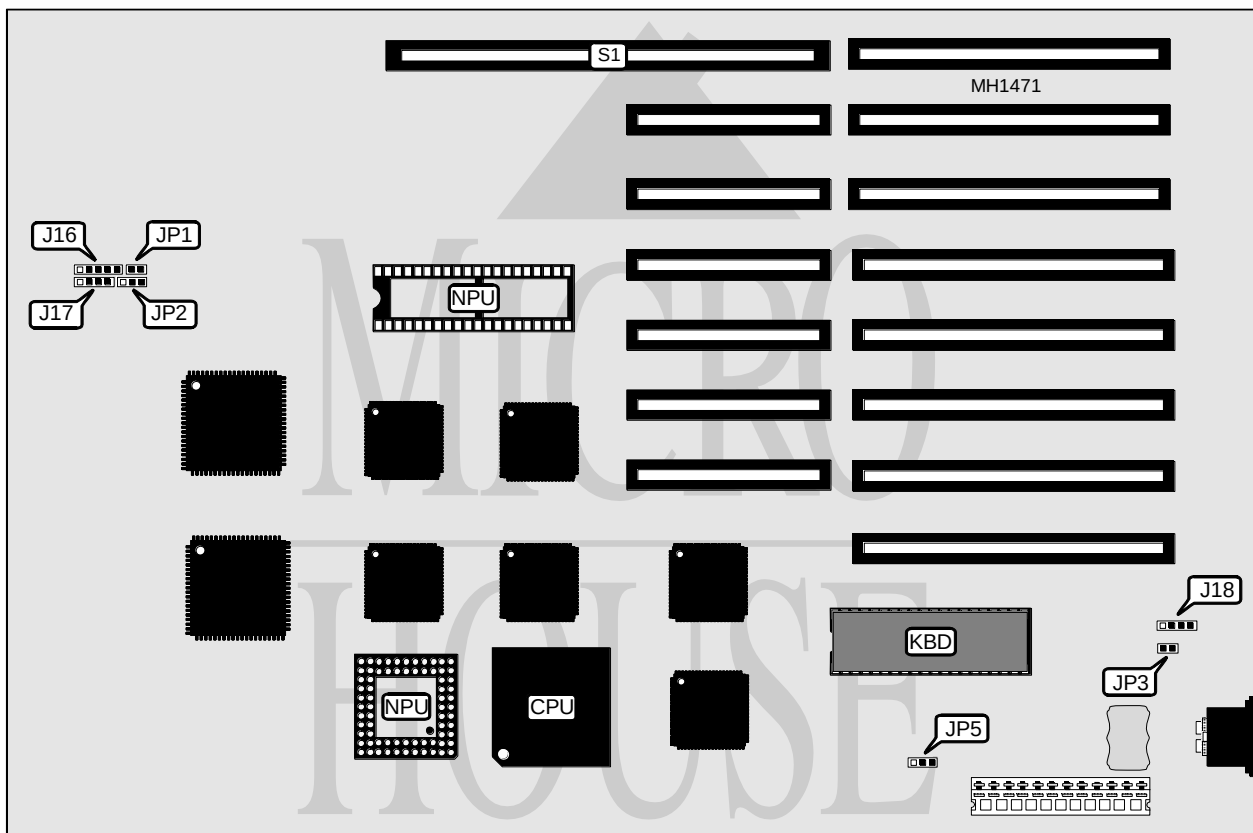



CONNECTIONS			
Purpose	Location	Purpose	Location
Reset switch	JP1	External battery	J18
Power LED & keylock	J16	32-bit proprietary memory card	S1
Speaker	J17		

Continued on next page . . .

UNIDENTIFIED
ELT 386B-200B

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper/Switch	Position
í NPU select 80387	JP2	pins 2 & 3 closed
NPU select 80287	JP2	pins 1 & 2 closed
í Monitor type select color	JP3	Closed
Monitor type select monochrome	JP3	Open
í CMOS memory normal operation	JP5	pins 1 & 2 closed
CMOS memory clear	JP5	pins 2 & 3 closed

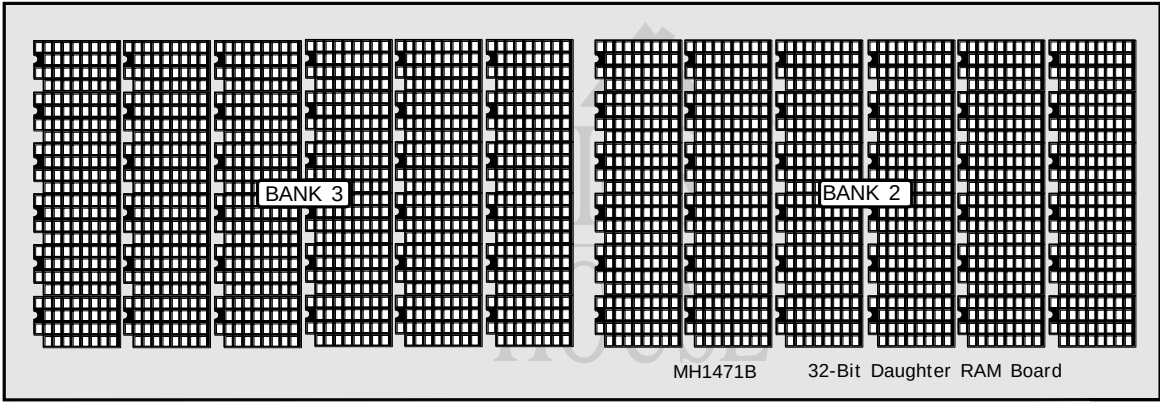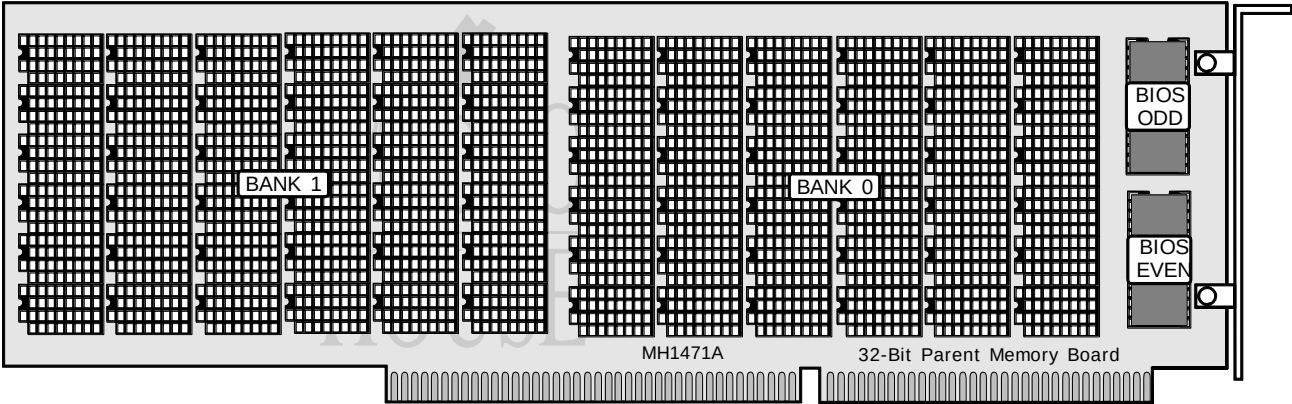

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
1MB	(36) 41256	NONE	NONE	NONE
2MB	(36) 41256	(36) 41256	NONE	NONE
4MB	(36) 41256	(36) 41256	(36) 41256	(36) 41256
4MB	(36) 411000	NONE	NONE	NONE
8MB	(36) 411000	(36) 411000	NONE	NONE
10MB	(36) 411000	(36) 411000	(36) 41256	(36) 41256
16MB	(36) 411000	(36) 411000	(36) 411000	(36) 411000