


UNIDENTIFIED CORRADO 386 (VERSION 2)

Processor 80386DX
Processor Speed 20/25MHz
Chip Set C & T
Max. onboard DRAM 10MB
Cache None
BIOS AMI
Dimensions 330mm x 218mm
I/O Options 32-bit external memory card
NPU Options 80387DX/3167

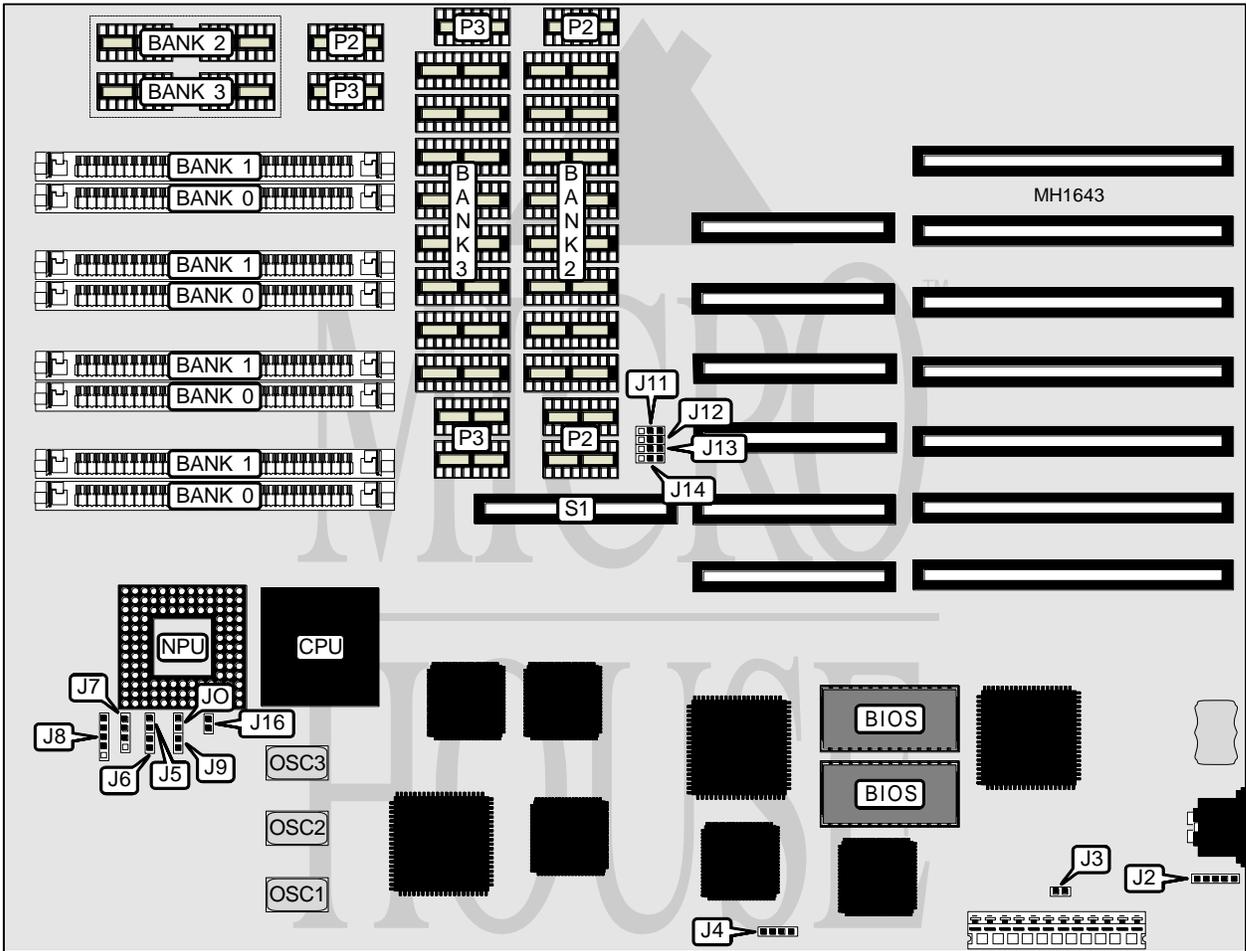

CONNECTIONS			
Purpose	Location	Purpose	Location
Reset switch	J0	Turbo Switch	J6
Keyboard pin connector	J2	Speaker	J7
External battery	J4	Power LED & keylock	J8
Turbo LED	J5	32-bit external memory card	S1

Continued on next page . . .

UNIDENTIFIED

CORRADO 386 (VERSION 2)

... continued from previous page

USER CONFIGURABLE SETTINGS

Function	Jumper	Position
í Monitor type select color	J3	Closed
Monitor type select monochrome	J3	Open
í NPU enabled	J9	Closed
NPU disabled	J9	Open
í NPU synchronous with CPU	J16	Closed
NPU asynchronous	J16	Open

DRAM CONFIGURATION

Size	Bank 0	Bank 1	Bank 2	Parity 2	Bank 3	Parity 3
1MB	(4) 256K x 9	NONE	NONE	NONE	NONE	NONE
1MB	NONE	NONE	(8) 44256	(4) 41256	NONE	NONE
2MB	(4) 256K x 9	(4) 256K x 9	NONE	NONE	NONE	NONE
2MB	NONE	NONE	(8) 44256	(4) 41256	(8) 44256	(4) 41256
4MB	(4) 1M x 9	NONE	NONE	NONE	NONE	NONE
4MB	(4) 256K x 9	(4) 256K x 9	(8) 44256	(4) 41256	(8) 44256	(4) 41256
8MB	(4) 1M x 9	(4) 1M x 9	NONE	NONE	NONE	NONE
10MB	(4) 1M x 9	(4) 1M x 9	(8) 44256	(4) 41256	(8) 44256	(4) 41256

DRAM JUMPER CONFIGURATION

Size	Type	J11	J12	J13	J14
1MB	SIMM	pins 1 & 2 closed			
1MB	DIP	pins 2 & 3 closed			
2MB	SIMM	pins 1 & 2 closed			
2MB	DIP	pins 2 & 3 closed			
4MB	SIMM	pins 1 & 2 closed			
4MB	DIP	pins 2 & 3 closed			
8MB	DIP	pins 2 & 3 closed			
10MB	DIP	pins 2 & 3 closed			