DIAMOND FLOWER, INC.
386SX-16/20/25/33DNE
386SX-33DCE

Processor	80386SX
Processor Speed	16/20/25MHz
Chip Set	Diamond Flower
Max. Onboard DRAM	16MB
Cache	None
BIOS	AMI
Dimensions	241mm x 220mm
I/O Options	None
NPU Options	80387SX

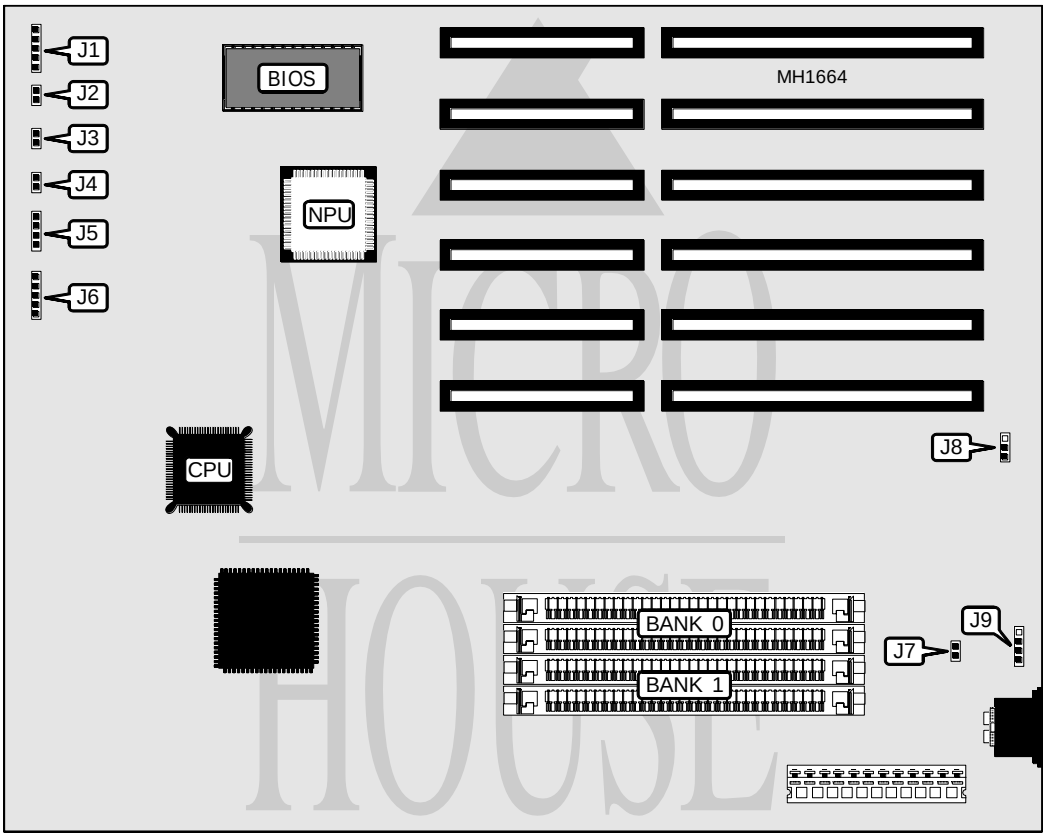

CONNECTIONS			
Purpose	Location	Purpose	Location
Keyboard connector	J1	Speaker	J5
Reset switch	J2	Power LED & keylock	J6
Turbo switch	J3	External battery	J9
Turbo LED	J4		

Continued on next page . . .

Copyright © 1992, 1993, **Micro House International** (303) 443-3388. All rights reserved. Including the right of reproduction in any form.

DIAMOND FLOWER, INC.
386SX-16/20/25/33DNE
386SX-33DCE

. . . continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select color	J7	closed
Monitor type select monochrome	J7	open
í CMOS memory normal operation (External Battery)	J8	pins 1 & 2 closed
CMOS memory normal operation (Internal Battery)	J8	pins 1 & 2 closed
CMOS memory clear	J8	Open

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
512KB	(2) 256K x 9	NONE
1MB	(2) 256K x 9	(2) 256K x 9
2MB	(2) 1M x 9	(2) 256K x 9
2.5MB	(2) 256K x 9	(2) 1M x 9
4MB	(2) 1M x 9	NONE
8MB	(2) 1M x 9	(2) 1M x 9
10MB	(2) 1M x 9	(2) 4M x 9
16MB	(2) 4M x 9	(2) 4M x 9

Copyright © 1992, 1993, **Micro House International** (303) 443-3388. All rights reserved. Including the right of reproduction in any form.