UNIDENTIFIED
OPTI 386-25/386-33

Processor	80386DX (Exact location is unknown)
Processor Speed	25/33MHz
Chip Set	OPTi
Max. Onboard DRAM	8MB
Cache	None
BIOS	AMI
Dimensions	330mm x 218mm
I/O Options	32-bit external memory card
NPU Options	80387DX/3167

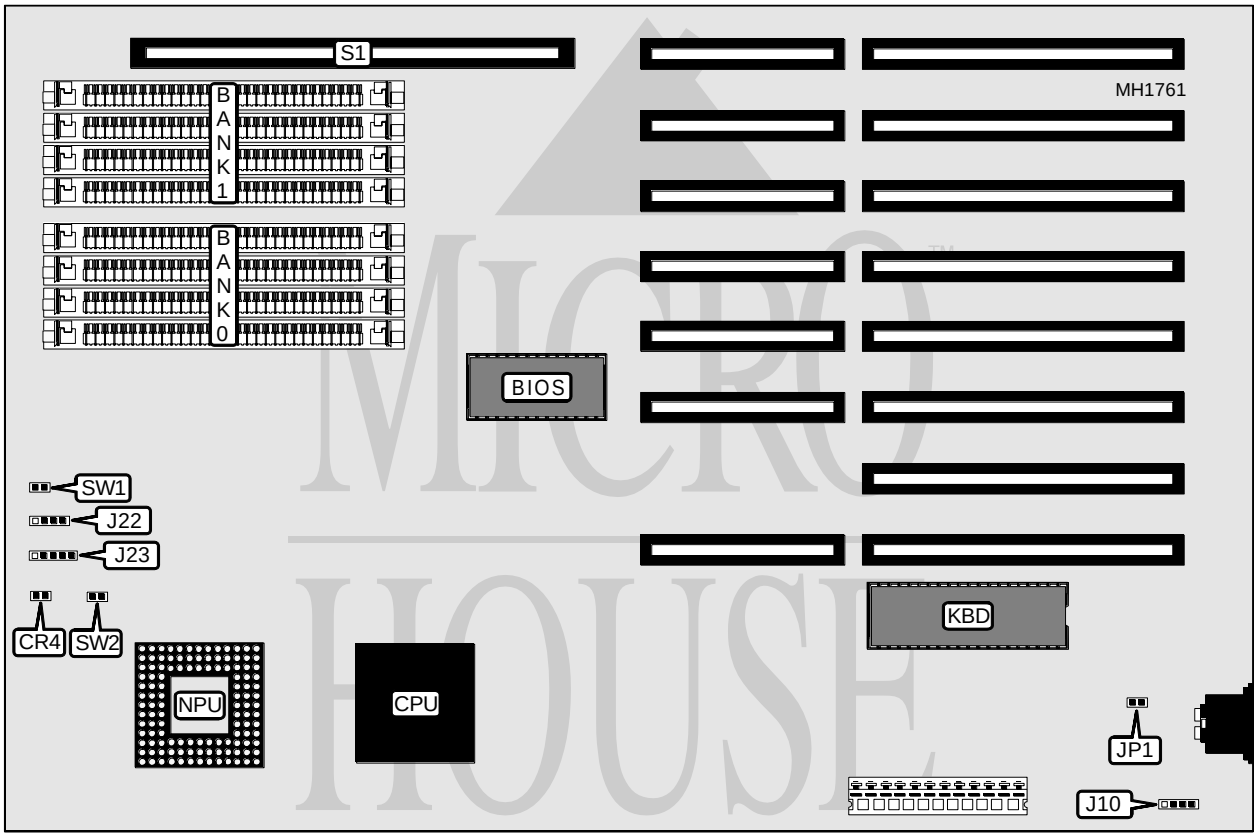

CONNECTIONS			
Purpose	Location	Purpose	Location
Turbo LED	CR4	Power LED & keylock	J23
External battery	J10	Reset switch	SW1
Speaker	J22	Turbo switch	SW2

Continued on next page . . .

Copyright © 1992, 1993, **Micro House International** (303) 443-3388. All rights reserved. Including the right of reproduction in any form.

UNIDENTIFIED
OPTI 386-25/386-33

. . . continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select color	JP1	Closed
Monitor type select monochrome	JP1	Open

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
1MB	(4) 256K x 9	NONE	NONE	NONE
2MB	(4) 256K x 9	(4) 256K x 9	NONE	NONE
3MB	(4) 256K x 9	(4) 256K x 9	(36) 41256	NONE
4MB	(4) 256K x 9	(4) 256K x 9	(36) 41256	(36) 41256
4MB	(4) 1M x 9	NONE	NONE	NONE
5MB	(4) 256K x 9	(4) 1M x 9	NONE	NONE
8MB	(4) 1M x 9	NONE	(36) 411000	NONE
8MB	(4) 1M x 9	(4) 1M x 9	NONE	NONE
16MB	(4) 1M x 9	(4) 1M x 9	(36) 411000	(36) 411000
Note: The locations of Bank 2 & Bank 3 can be found on the external memory card.				

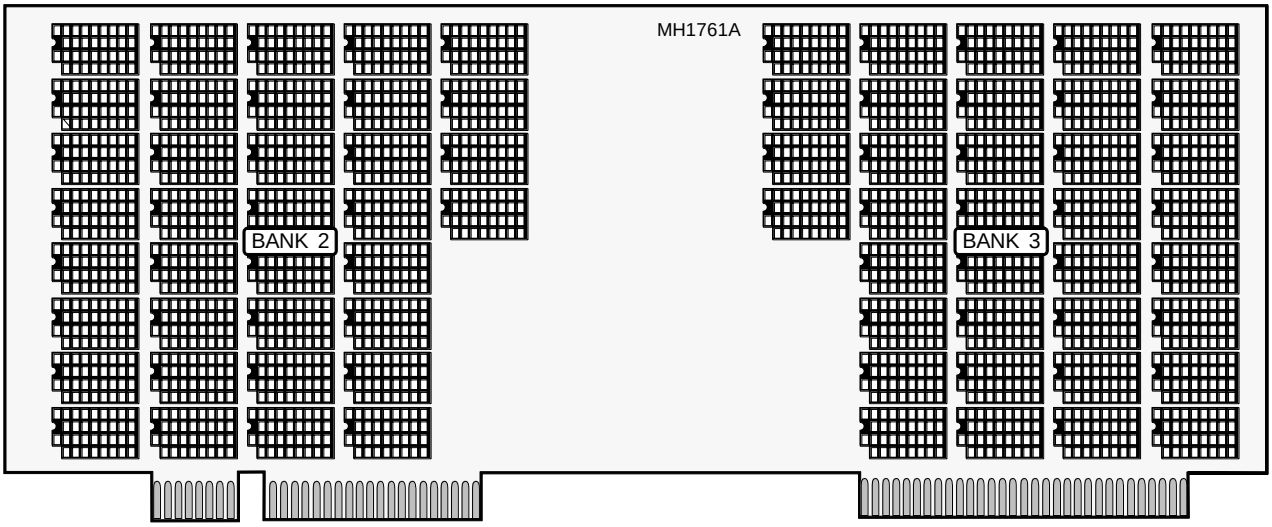

Copyright © 1992, 1993, **Micro House International** (303) 443-3388. All rights reserved. Including the right of reproduction in any form.