


UNIDENTIFIED

CGS 386

Processor	80386DX(exact location unknown)
Processor Speed	25/33/40MHz
Chip Set	Unidentified
Max. Onboard DRAM	32MB
Cache	None
BIOS	AMI
Dimensions	330mm x 218mm
I/O Options	None
NPU Options	3167

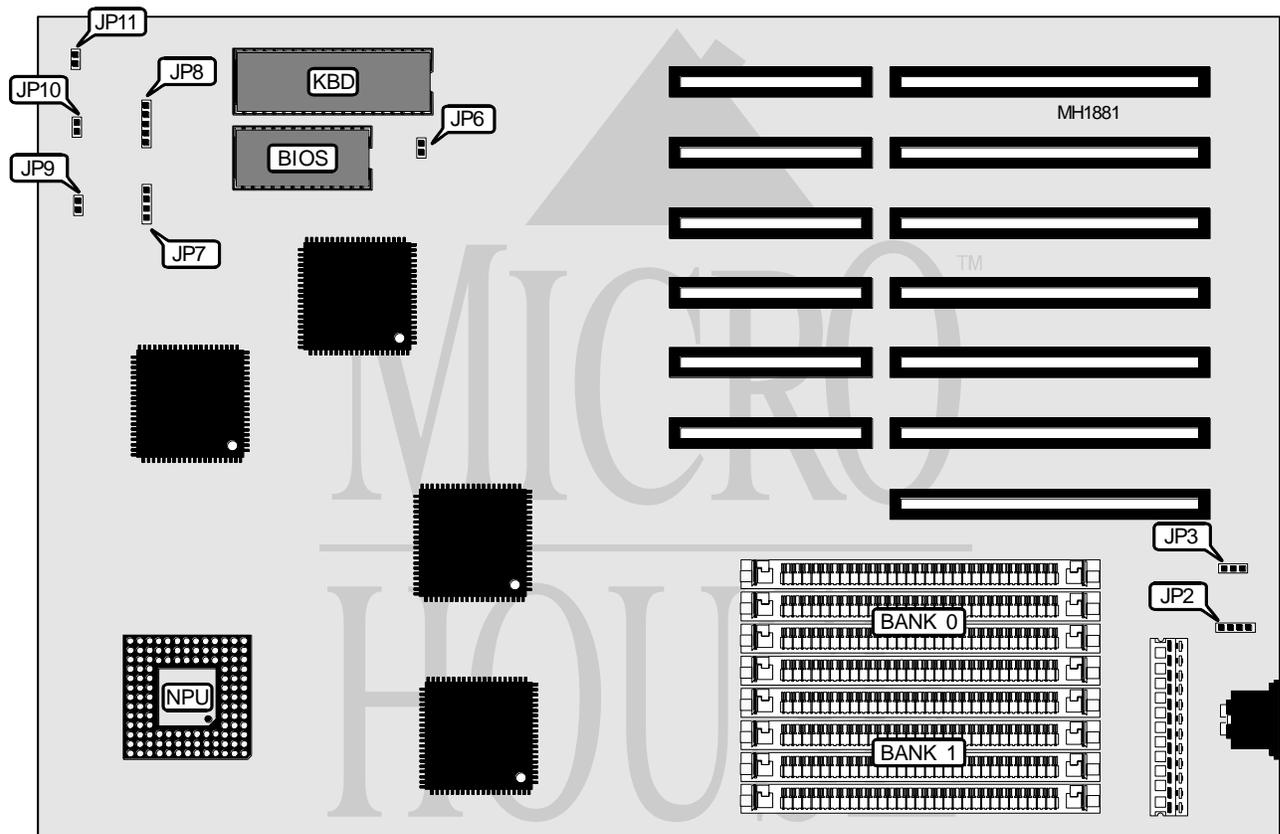

CONNECTIONS

Purpose	Location	Purpose	Location
External battery	JP2	Reset switch	JP9
Speaker	JP7	Turbo switch	JP10
Keylock & power LED	JP8	Turbo LED	JP11

Continued on next page. . .

UNIDENTIFIED

CGS 386

...continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select monochrome	JP6	Open
Monitor type select color	JP6	Closed
í CMOS memory normal operation	JP3	pins 1 & 2 closed
CMOS memory clear	JP3	pins 2 & 3 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
5MB	(4) 256K x 9	(4) 1M x 9
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
17MB	(4) 256K x 9	(4) 4M x 9
20MB	(4) 1M x 9	(4) 4M x 9
32MB	(4) 4M x 9	(4) 4M x 9