


# UNIDENTIFIED P 3 8 6 / 2 5

|                          |                                    |
|--------------------------|------------------------------------|
| <b>Processor</b>         | 80386DX                            |
| <b>Processor Speed</b>   | 25MHz                              |
| <b>Chip Set</b>          | OPTI                               |
| <b>Max. Onboard DRAM</b> | 16MB (8MB on external memory card) |
| <b>Cache</b>             | None                               |
| <b>BIOS</b>              | Phoenix                            |
| <b>Dimensions</b>        | 330mm x 218mm                      |
| <b>I/O Options</b>       | 32-bit external memory card        |
| <b>NPU Options</b>       | 80387DX/3167                       |

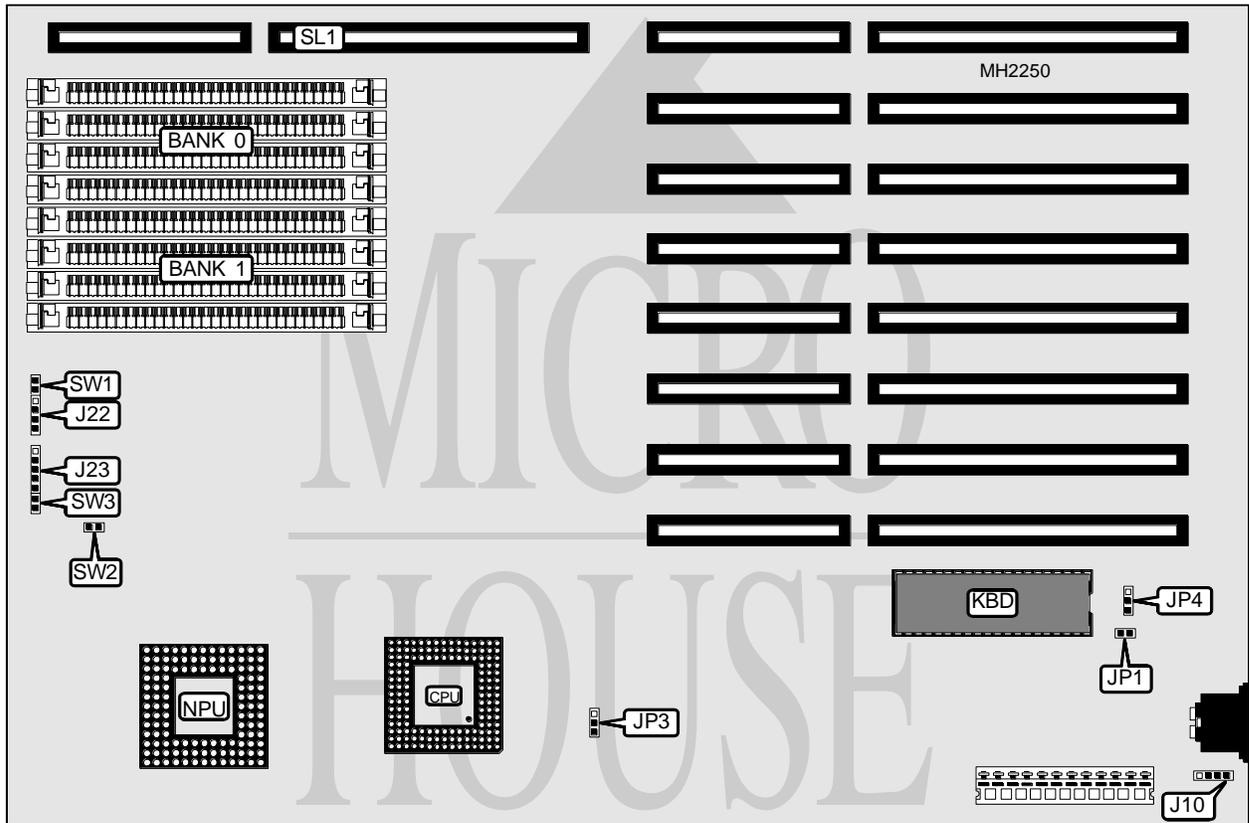

| CONNECTIONS         |          |                             |          |
|---------------------|----------|-----------------------------|----------|
| Purpose             | Location | Purpose                     | Location |
| External battery    | J10      | Turbo switch                | SW2      |
| Speaker             | J22      | Turbo LED                   | SW3      |
| Power LED & keylock | J23      | 32-bit external memory card | SL1      |
| Reset switch        | SW1      |                             |          |

Continued next page. . .

# UNIDENTIFIED

## P 3 8 6 / 2 5

... continued from previous page

| USER CONFIGURABLE SETTINGS                 |        |                   |
|--|--------|-------------------|
| Function                                   | Jumper | Position          |
| í Monitor type select CGA/EGA/VGA          | JP1    | Closed            |
| Monitor type select Hercules/monochrome    | JP1    | Open              |
| í Power good signal detect from board      | JP3    | pins 1 & 2 closed |
| Power good signal detect from power supply | JP3    | pins 2 & 3 closed |

| DRAM CONFIGURATION |              |              |              |              |
|--------------------|--------------|--------------|--------------|--------------|
| Size               | Bank 0       | Bank 1       | Bank 2       | Bank 3       |
| 1MB                | (4) 256K x 9 | NONE         | NONE         | NONE         |
| 2MB                | (4) 256K x 9 | (4) 256K x 9 | NONE         | NONE         |
| 3MB                | (4) 256K x 9 | (4) 256K x 9 | (4) 256K x 9 | NONE         |
| 4MB                | (4) 256K x 9 |
| 4MB                | (4) 1M x 9   | NONE         | NONE         | NONE         |
| 5MB                | (4) 1M x 9   | (4) 256K x 9 | NONE         | NONE         |
| 5MB                | (4) 256K x 9 | (4) 1M x 9   | NONE         | NONE         |
| 6MB                | (4) 256K x 9 | (4) 256K x 9 | (4) 1M x 9   | NONE         |
| 6MB                | (4) 256K x 9 | (4) 1M x 9   | (4) 256K x 9 | NONE         |
| 6MB                | (4) 1M x 9   | (4) 256K x 9 | (4) 256K x 9 | NONE         |
| 7MB                | (4) 256K x 9 | (4) 256K x 9 | (4) 1M x 9   | (4) 256K x 9 |
| 7MB                | (4) 256K x 9 | (4) 1M x 9   | (4) 256K x 9 | (4) 256K x 9 |
| 7MB                | (4) 1M x 9   | (4) 256K x 9 | (4) 256K x 9 | (4) 256K x 9 |
| 8MB                | (4) 1M x 9   | (4) 1M x 9   | NONE         | NONE         |
| 9MB                | (4) 256K x 9 | (4) 1M x 9   | (4) 1M x 9   | NONE         |
| 9MB                | (4) 1M x 9   | (4) 256K x 9 | (4) 1M x 9   | NONE         |
| 9MB                | (4) 1M x 9   | (4) 1M x 9   | (4) 256K x 9 | NONE         |
| 10MB               | (4) 256K x 9 | (4) 256K x 9 | (4) 1M x 9   | (4) 1M x 9   |
| 10MB               | (4) 256K x 9 | (4) 1M x 9   | (4) 1M x 9   | (4) 256K x 9 |
| 10MB               | (4) 1M x 9   | (4) 256K x 9 | (4) 256K x 9 | (4) 1M x 9   |
| 10MB               | (4) 1M x 9   | (4) 1M x 9   | (4) 256K x 9 | (4) 256K x 9 |
| 12MB               | (4) 1M x 9   | (4) 1M x 9   | (4) 1M x 9   | NONE         |
| 13MB               | (4) 256K x 9 | (4) 1M x 9   | (4) 1M x 9   | (4) 1M x 9   |
| 13MB               | (4) 1M x 9   | (4) 1M x 9   | (4) 1M x 9   | (4) 256K x 9 |
| 13MB               | (4) 1M x 9   | (4) 256K x 9 | (4) 1M x 9   | (4) 1M x 9   |
| 16MB               | (4) 1M x 9   |

Note: Banks 2 & 3 are located on the external memory card.

| BATTERY TYPE CONFIGURATION |                   |
|----------------------------|-------------------|
| Type                       | JP4               |
| 3.6v                       | pins 2 & 3 closed |
| 4.5v                       | pins 1 & 2 closed |
| 6.0v                       | Open              |