


UNIDENTIFIED M B 1 0 H

| | |
|--------------------------|---------------|
| Processor | 8088 |
| Processor Speed | 10MHz |
| Chip Set | Unidentified |
| Max. Onboard DRAM | 640KB |
| Cache | None |
| BIOS | Unidentified |
| Dimensions | 254mm x 218mm |
| I/O Options | None |
| NPU Options | 8087 |

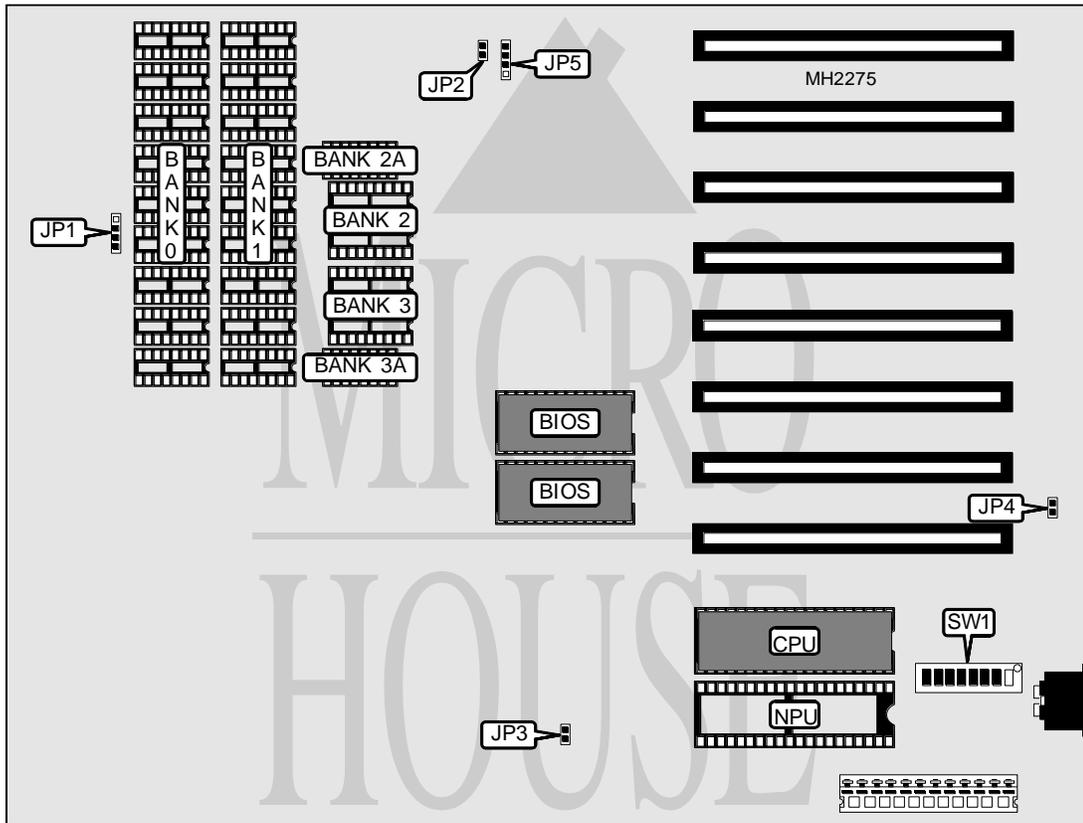

| CONNECTIONS | | | |
|--------------|----------|--------------|------------------|
| Purpose | Location | Purpose | Location |
| Speaker | JP1 | Reset switch | JP4 |
| Turbo switch | JP2 | Power LED | JP5 (pins 3 & 4) |
| Keylock | JP3 | Turbo LED | JP5 (pins 3 & 2) |

Continued on next page. . .

UNIDENTIFIED M B 1 0 H

... continued from previous page

| USER CONFIGURABLE SETTINGS | | |
|-------------------------------------|--------|----------|
| Function | Switch | Position |
| í Factory configured - do not alter | SW1/1 | Off |
| í NPU disabled | SW1/2 | On |
| NPU enabled | SW1/2 | Off |
| í Factory configured - do not alter | SW1/3 | Off |
| í Factory configured - do not alter | SW1/4 | Off |

| DRAM CONFIGURATION | | | | | | |
|--------------------|-----------|-----------|----------|----------|----------|----------|
| Size | Bank 0 | Bank 1 | Bank 2 | Bank 2A | Bank 3 | Bank 3A |
| 256KB | (9) 41256 | NONE | NONE | NONE | NONE | NONE |
| 512KB | (9) 41256 | (9) 41256 | NONE | NONE | NONE | NONE |
| 576KB | (9) 41256 | (9) 41256 | (2) 4464 | (1) 4164 | NONE | NONE |
| 640KB | (9) 41256 | (9) 41256 | (2) 4464 | (1) 4164 | (2) 4464 | (1) 4164 |

| VIDEO CONFIGURATION | | |
|---------------------|-------|-------|
| Size | SW1/5 | SW1/6 |
| None installed | On | On |
| Color (40 x 20) | Off | On |
| Color (80 x 25) | On | Off |
| Monochrome | Off | Off |

| FLOPPY DRIVE CONFIGURATION | | |
|----------------------------|-------|-------|
| Drives installed | SW1/7 | SW1/8 |
| 1 | On | On |
| 2 | Off | On |
| 3 | On | Off |
| 4 | Off | Off |