


SEANIX TECHNOLOGY, INC.

ASI-HT18

Processor	80386SX
Processor Speed	16/25MHz
Chip Set	Headland
Max. Onboard DRAM	16MB
Cache	None
BIOS	AMI
Dimensions	165mm x 110mm
I/O Options	None
NPU Options	80387SX

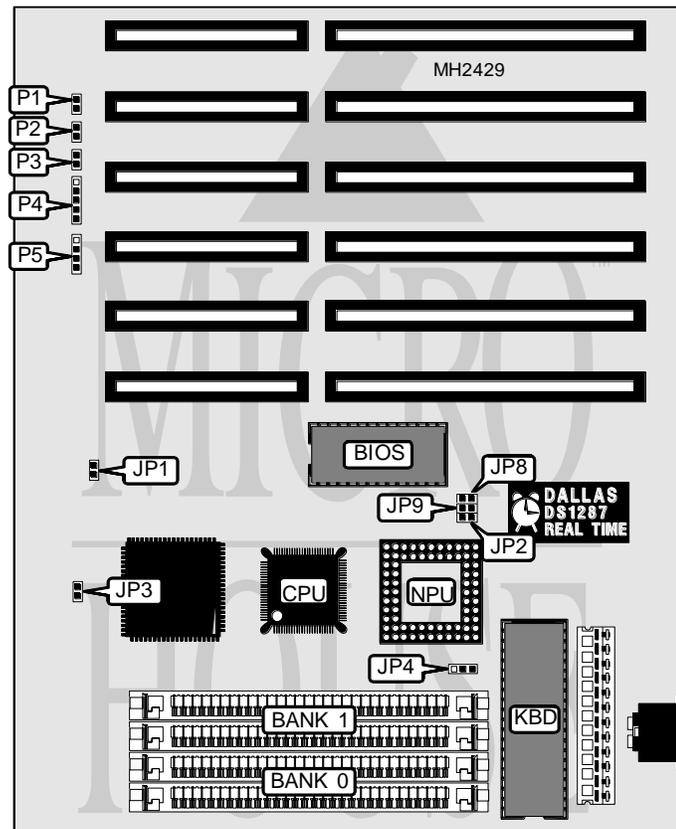

CONNECTIONS			
Purpose	Location	Purpose	Location
Reset switch	P1	Power LED & keylock	P4
Turbo LED	P2	Speaker	P5
Turbo switch	P3		

Continued on next page. . .

SEANIX TECHNOLOGY, INC.

ASI-HT18

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í CPU oscillator speed select 50MHz	JP1	Open
CPU oscillator speed select 32MHz	JP1	Closed
í Monitor type select monochrome	JP2	Open
Monitor type select color	JP2	Closed
í Factory configured - do not alter	JP3	Open
í System speed type select turbo switch	JP4	pins 2 & 3 closed
System speed type select keyboard	JP4	pins 1 & 2 closed
í Factory configured - do not alter	JP8	Open
í Factory configured - do not alter	JP9	Open

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(2) 256K x 9	(2) 256K x 9
2MB	(2) 1M x 9	NONE
4MB	(2) 1M x 9	(2) 1M x 9
8MB	(2) 4M x 9	NONE
10MB	(2) 1M x 9	(2) 4M x 9
16MB	(2) 4M x 9	(2) 4M x 9