


SIEMENS NIXDORF INFORMATIONSSYSTEME AG

S 2 6 3 6 1 - D 8 1 8

Processor	Pentium
Processor Speed	60MHz
Chip Set	Unidentified
Max. Onboard DRAM	128MB
Cache	256KB(location unidentified)
BIOS	Unidentified
Dimensions	330mm x 218mm
I/O Options	Floppy drive interface, IDE interface, parallel port, PS/2 mouse port, serial ports (2), VGA feature connector, VGA port
NPU Options	None

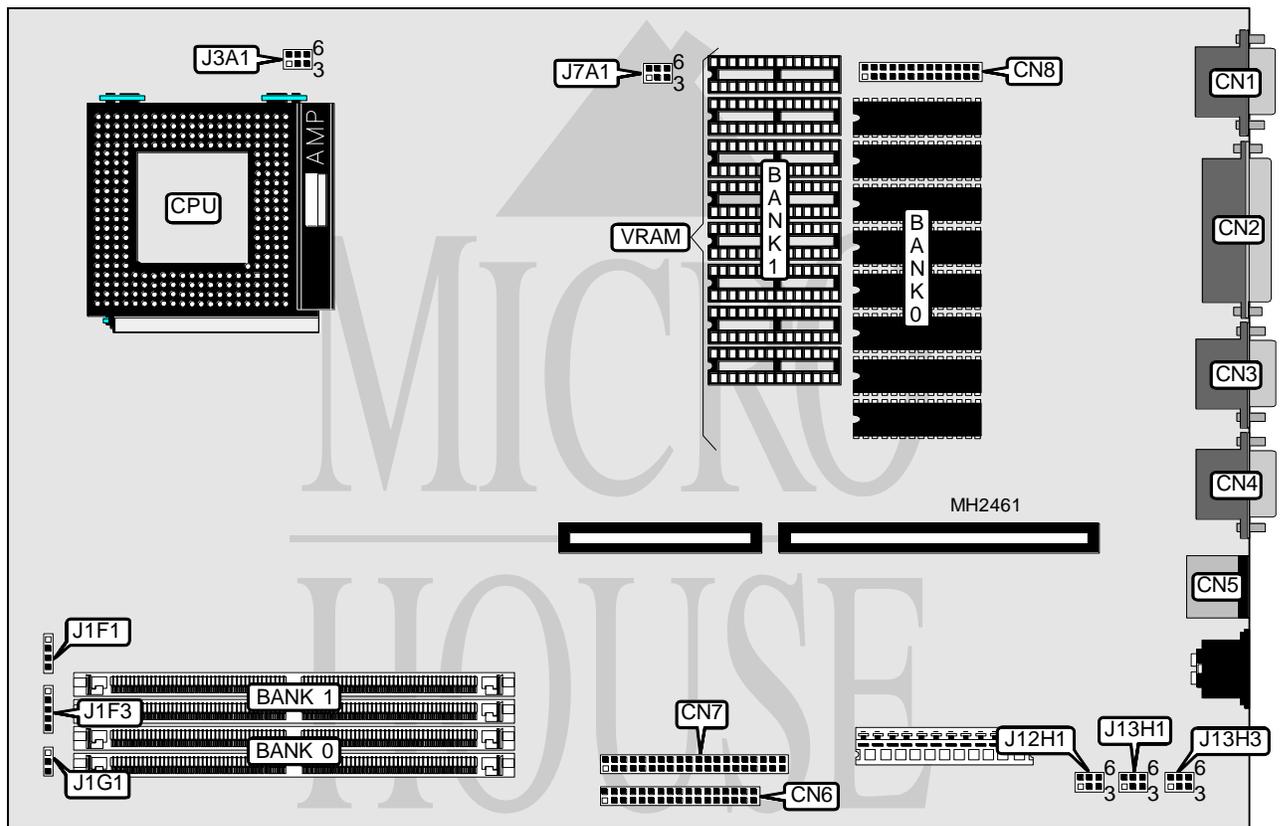

CONNECTIONS			
Purpose	Location	Purpose	Location
VGA port	CN1	IDE interface	CN7
Parallel port	CN2	VGA feature connector	CN8
Serial port 2	CN3	Speaker	J1F1
Serial port 1	CN4	Chassis fan power	J3A1
PS/2 mouse port	CN5	Power LED & keylock	J1F3
Floppy drive interface	CN6	IDE interface LED	J1G1

Continued on next page. . .

SIEMENS NIXDORF INFORMATIONSSYSTEME AG

S 2 6 3 6 1 - D 8 1 8

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Factory configured - do not alter	J7A1	pins 2 & 3 closed
í BIOS write protect enabled	J12H1	pins 1 & 2 closed
BIOS write protect disabled	J12H1	pins 2 & 3 closed
í BIOS mode select normal	J12H1	pins 5 & 6 closed
BIOS mode select recovery	J12H1	pins 4 & 5 closed
í Password enabled	J13H1	pins 1 & 2 closed
Password disabled	J13H1	pins 2 & 3 closed
í CMOS memory normal operation	J13H1	pins 4 & 5 closed
CMOS memory clear	J13H1	pins 5 & 6 closed
í BIOS setup entry enabled	J13H3	pins 1 & 2 closed
BIOS setup entry disabled	J13H3	pins 2 & 3 closed
í Monitor type select color	J13H3	pins 5 & 6 closed
Monitor type select monochrome	J13H3	pins 4 & 5 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
8MB	(2) 1M x 36	NONE
10MB	(2) 256K x 36	(2) 1M x 36
12MB	(2) 512K x 36	(2) 1M x 36
16MB	(2) 1M x 36	(2) 1M x 36
16MB	(2) 2M x 36	NONE
18MB	(2) 256K x 36	(2) 2M x 36
20MB	(2) 512K x 36	(2) 2M x 36
24MB	(2) 1M x 36	(2) 2M x 36
32MB	(2) 2M x 36	(2) 2M x 36
32MB	(2) 4M x 36	NONE
34MB	(2) 256K x 36	(2) 4M x 36
36MB	(2) 512K x 36	(2) 4M x 36
40MB	(2) 1M x 36	(2) 4M x 36
48MB	(2) 2M x 36	(2) 4M x 36
64MB	(2) 4M x 36	(2) 4M x 36
64MB	(2) 8M x 36	NONE
66MB	(2) 256K x 36	(2) 8M x 36
68MB	(2) 512K x 36	(2) 8M x 36
72MB	(2) 1M x 36	(2) 8M x 36
80MB	(2) 2M x 36	(2) 8M x 36
96MB	(2) 4M x 36	(2) 8M x 36
128MB	(2) 8M x 36	(2) 8M x 36

CACHE CONFIGURATION
Note: This board contains 256KB of cache. The location is unidentified.

Continued on next page. . .

SIEMENS NIXDORF INFORMATIONSSYSTEME AG
S 2 6 3 6 1 - D 8 1 8*... continued from previous page*

VIDEO MEMORY CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(8) 256K x 4	NONE
2MB	(8) 256K x 4	(8) 256K x 4
Note: Bank 0 is factory installed and is not configurable.		