


ICL ERGOPRO D5 P-SERIES

| | |
|--------------------------|--|
| Processor | Pentium |
| Processor Speed | 90MHz |
| Chip Set | OPTI |
| Max. Onboard DRAM | 128MB |
| Cache | 512KB |
| BIOS | ICL |
| Dimensions | 330mm x 218mm |
| I/O Options | PS/2 mouse port, parallel port, serial ports (2), VGA port, floppy drive interface, IDE interface, riser slots (2) |
| NPU Options | None |

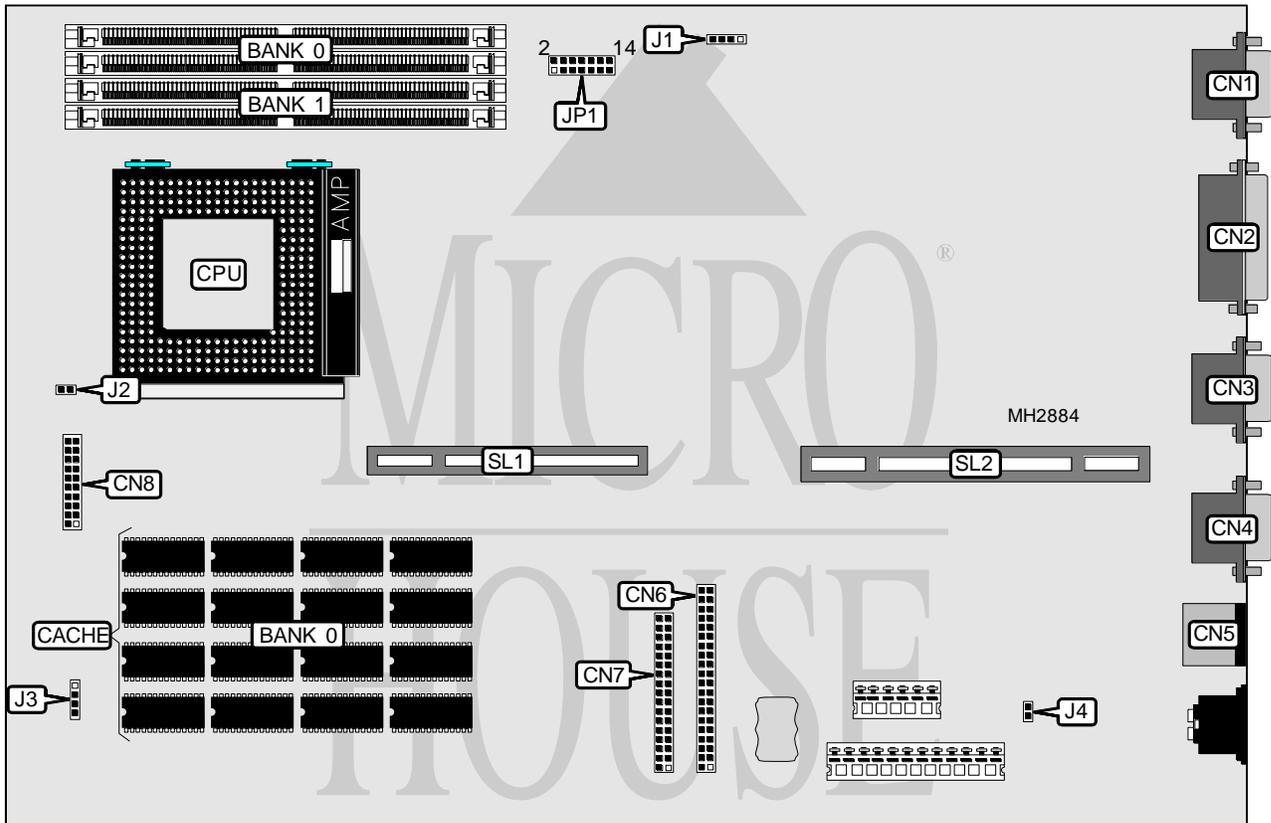

| CONNECTIONS | | | |
|-----------------|----------|------------------------|-----------|
| Purpose | Location | Purpose | Location |
| VGA port | CN1 | Floppy drive interface | CN8 |
| Parallel port | CN2 | IDE interface LED | J1 |
| Serial port 2 | CN3 | Chassis fan power | J2 |
| Serial port 1 | CN4 | Front panel connector | J3 |
| PS/2 mouse port | CN5 | Chassis fan power | J4 |
| IDE interface | CN7 | Riser Card | SL1 & SL2 |

Continued on next page. . .

ICL ERGOPRO D5 P-SERIES

... continued from previous page

| USER CONFIGURABLE SETTINGS | | |
|-------------------------------------|--------|---------------------|
| Function | Jumper | Position |
| í CMOS memory normal operation | JP1 | pins 3 & 4 closed |
| CMOS memory clear | JP1 | pins 5 & 6 closed |
| í System lock disabled | JP1 | pins 11 & 12 closed |
| System lock enabled | JP1 | pins 9 & 10 closed |
| í Boot block BL RE normal operation | JP1 | pins 13 & 14 open |
| Boot block BL RE reload enabled | JP1 | pins 13 & 14 closed |

| DRAM CONFIGURATION | | |
|--------------------|-------------|-------------|
| Size | Bank 0 | Bank 1 |
| 8MB | (2) 1M x 36 | NONE |
| 16MB | (2) 1M x 36 | (2) 1M x 36 |
| 16MB | (2) 2M x 36 | NONE |
| 24MB | (2) 2M x 36 | (2) 1M x 36 |
| 32MB | (2) 2M x 36 | (2) 2M x 36 |
| 32MB | (2) 4M x 36 | NONE |
| 40MB | (2) 1M x 36 | (2) 4M x 36 |
| 48MB | (2) 4M x 36 | (2) 2M x 36 |
| 64MB | (2) 4M x 36 | (2) 4M x 36 |
| 64MB | (2) 8M x 36 | NONE |
| 72MB | (2) 1M x 36 | (2) 8M x 36 |
| 80MB | (2) 2M x 36 | (2) 8M x 36 |
| 96MB | (2) 8M x 36 | (2) 4M x 36 |
| 128MB | (2) 8M x 36 | (2) 8M x 36 |

| CACHE CONFIGURATION | |
|---|--------------|
| Size | Bank 0 |
| 512KB | (16) 32K x 8 |
| Note: Cache is factory installed and is not configurable. | |

| CPU SPEED CONFIGURATION | |
|-------------------------|-----------------|
| Speed | JP1 |
| 90MHz | pins 7 & 8 open |