


MORSE TECHNOLOGIES, INC.

KP 386SX 20MHZ

Processor 80386SX
Processor Speed 20MHz
Chip Set Intel
Max. Onboard DRAM 20MB
Cache None
BIOS AMI
Dimensions 330mm x 218mm
I/O Options None
NPU Options 80387SX

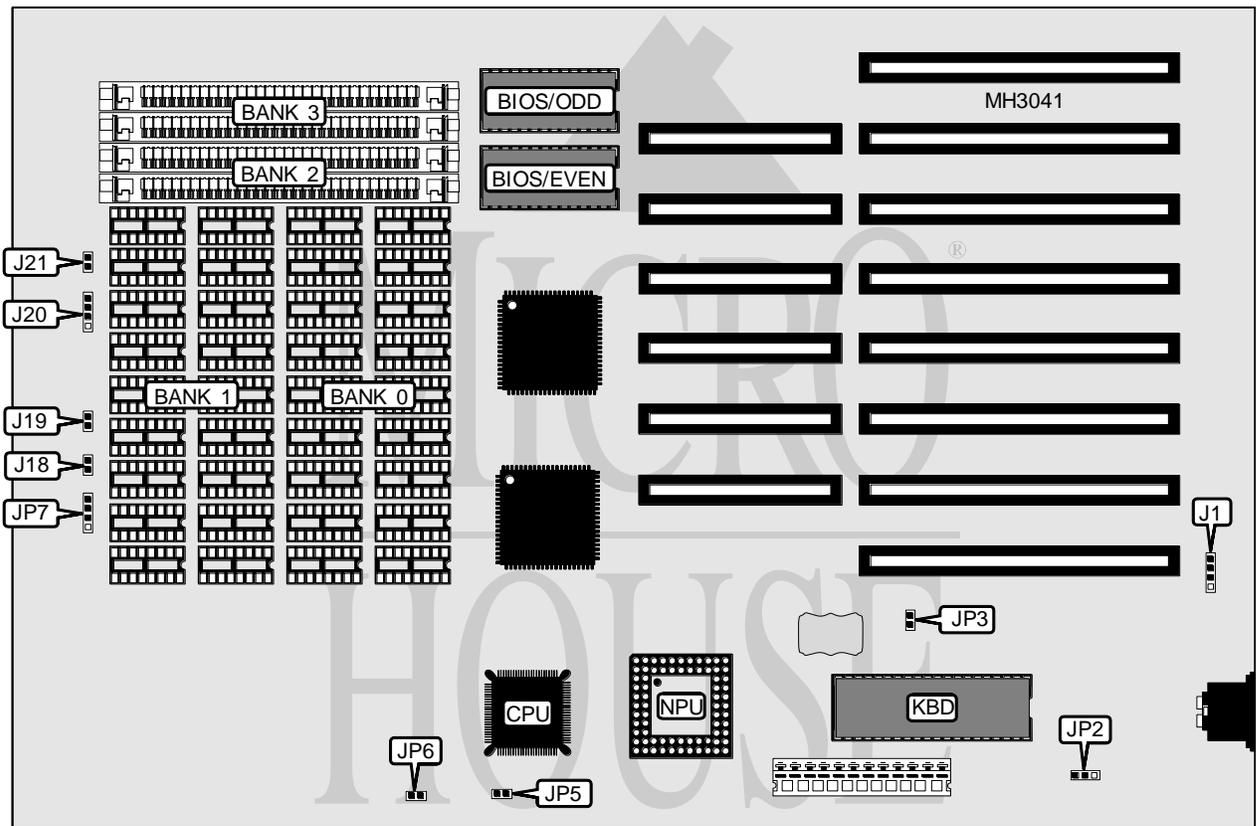

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J1	Turbo switch	J19
Power LED & keylock	JP7	Speaker	J20
Turbo LED	J18	Reset switch	J21

Continued on next page. . .

MORSE TECHNOLOGIES, INC.
 KP 386SX 20MHZ

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select color	JP2	pins 2 & 3 closed
Monitor type select monochrome	JP2	pins 1 & 2 closed
í CMOS memory normal	JP3	Open
CMOS memory clear	JP3	Closed
í Factory configured - do not alter	JP5	N/A
í Factory configured - do not alter	JP6	N/A

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
512KB	(9) 41256	NONE	NONE	NONE
512KB	NONE	NONE	NONE	(2) 256K x 9
1MB	(9) 41256	(9) 41256	NONE	NONE
1MB	NONE	NONE	(2) 256K x 9	(2) 256K x 9
1.5MB	(9) 41256	(9) 41256	(2) 256K x 9	NONE
2MB	(9) 41256	(9) 41256	(2) 256K x 9	(2) 256K x 9
2MB	(18) 41256	NONE	NONE	NONE
2MB	NONE	NONE	NONE	(2) 1M x 9
3MB	(9) 41256	(9) 41256	(2) 1M x 9	NONE
4MB	(18) 41256	(18) 41256	NONE	NONE
4MB	NONE	NONE	(2) 1M x 9	(2) 1M x 9
4.5MB	(18) 41256	(18) 41256	(2) 256K x 9	NONE
5MB	(9) 41256	(9) 41256	(2) 1M x 9	(2) 1M x 9
6MB	(18) 41256	(18) 41256	(2) 1M x 9	NONE
8MB	(18) 41256	(18) 41256	(2) 1M x 9	(2) 1M x 9
8MB	NONE	NONE	NONE	(2) 4M x 9
9MB	(9) 41256	(9) 41256	(2) 4M x 9	NONE
12MB	(18) 41256	(18) 41256	(2) 4M x 9	NONE
16MB	NONE	NONE	(2) 4M x 9	(2) 4M x 9
17MB	(9) 41256	(9) 41256	(2) 4M x 9	(2) 4M x 9
20MB	(18) 41256	(18) 41256	(2) 4M x 9	(2) 4M x 9