


DTK COMPUTER, INC.

GRAFIKA 3 A

Processor	80386SX
Processor Speed	20MHz
Chip Set	C & T
Max. Onboard DRAM	5MB
Cache	None
BIOS	DTK
Dimensions	330mm x 218mm
I/O Options	None
NPU Options	80387SX

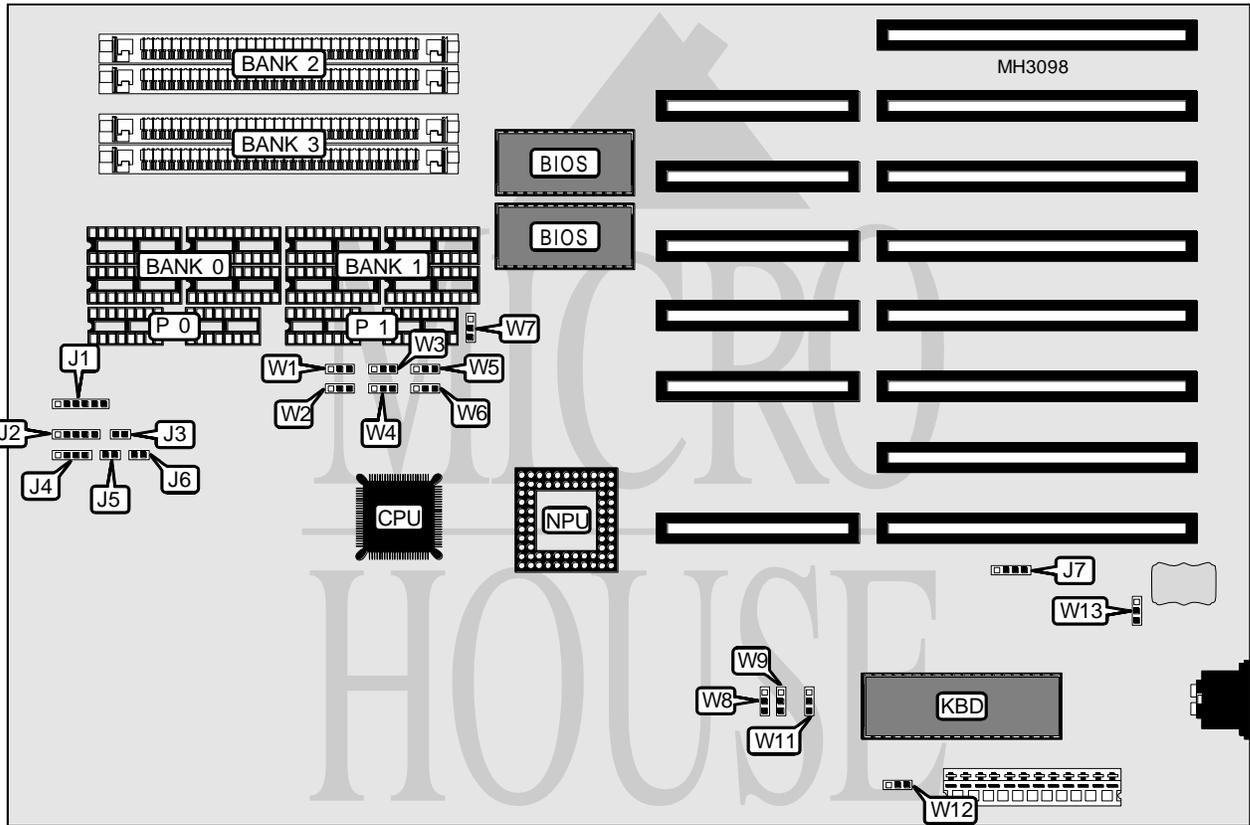

CONNECTIONS			
Purpose	Location	Purpose	Location
CPU frequency connector	J1	Turbo LED	J5
Power LED & keylock	J2	Reset switch	J6
Turbo switch	J3	External battery	J7
Speaker	J4		

Continued on next page. . .

DTK COMPUTER, INC.

GRAFKA 3A

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í BIOS type select 27256	W7	pins 1 & 2 closed
BIOS type select 27128	W7	pins 2 & 3 closed
í Pipeline mode enabled	W8	pins 2 & 3 closed
Pipeline mode disabled	W8	pins 1 & 2 closed
í NPU disabled	W9	pins 2 & 3 closed
NPU enabled	W9	pins 1 & 2 closed
í Power good signal detect from power supply	W11	pins 2 & 3 closed
Power good signal detect from board	W11	pins 1 & 2 closed
í Monitor type select monochrome	W12	pins 1 & 2 closed
Monitor type select color	W12	pins 2 & 3 closed
í Battery type select external	W13	pins 1 & 2 closed
Battery type select internal	W13	pins 2 & 3 closed

DRAM CONFIGURATION						
Size	Bank 0	P 0	Bank 1	P 1	Bank 2	Bank 3
512KB	(4) 44256	(2) 41256	NONE	NONE	NONE	NONE
640KB	(4) 44256	(2) 41256	(4) 4164	(2) 41256	NONE	NONE
1MB	(4) 44256	(2) 41256	(4) 44256	(2) 41256	NONE	NONE
1.5MB	(4) 44256	(2) 41256	(4) 44256	(2) 41256	(2) 256K x 9	NONE
2MB (A)	(4) 44256	(2) 41256	(4) 44256	(2) 41256	(2) 256K x 9	(2) 256K x 9
2MB (B)	NONE	NONE	NONE	NONE	(2) 1M x 9	NONE
3MB	(4) 44256	(2) 41256	(4) 44256	(2) 41256	(2) 1M x 9	NONE
4MB	NONE	NONE	NONE	NONE	(2) 1M x 9	(2) 1M x 9
5MB	(4) 44256	(2) 41256	(4) 44256	(2) 41256	(2) 1M x 9	(2) 1M x 9

DRAM JUMPER CONFIGURATION						
Size	W1	W2	W3	W4	W5	W6
512KB	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2
640KB	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2
1MB	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2
1.5MB	2 & 3	2 & 3	2 & 3	2 & 3	2 & 3	2 & 3
2MB (A)	2 & 3	2 & 3	2 & 3	2 & 3	2 & 3	2 & 3
2MB (B)	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2
3MB	2 & 3	2 & 3	2 & 3	2 & 3	2 & 3	2 & 3
4MB	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2
5MB	2 & 3	2 & 3	2 & 3	2 & 3	2 & 3	2 & 3

Note: Pins designated should be in the closed position.