UNIDENTIFIED
OPTI396 MODEL 1

Processor	AM386DXL/80386DX
Processor Speed	25MHz
Chip Set	OPTI
Max. Onboard DRAM	32MB
Cache	None
BIOS	AMI
Dimensions	230mm x 220mm
I/O Options	None
NPU Options	80387DX/3167

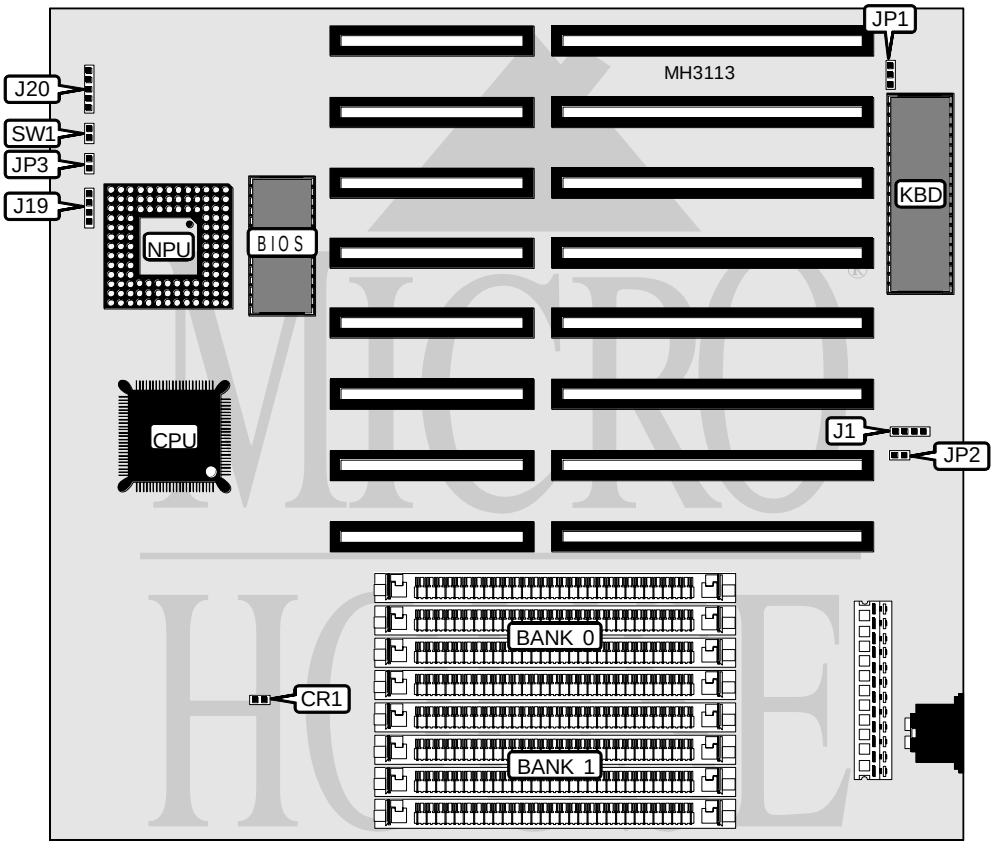

CONNECTIONS			
Purpose	Location	Purpose	Location
Turbo LED	CR1	Power LED & keylock	J20
External battery	J1	Turbo switch	JP3
Speaker	J19	Reset switch	SW1

Continued on next page. . .

Copyright © 1995, 1996, **Micro House International** (303) 443-3388. All rights reserved. Including the right of reproduction in any form.

UNIDENTIFIED
OPTI396 MODEL 1

. . . continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
Monitor type select monochrome	JP1	Open
Monitor type select color	JP1	Closed
í CMOS memory normal operation	JP2	pins 2 & 3 closed
CMOS memory clear	JP2	pins 1 & 2 closed
í Factory configured - do not alter	JP4	pins 2 & 3 closed
í Factory configured - do not alter	JP5	pins 2 & 3 closed
Note: The location of jumpers JP4 and JP5 are unidentified.		

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
5MB	(4) 256K x 9	(4) 1M x 9
5MB	(4) 1M x 9	(4) 256K x 9
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
32MB	(4) 4M x 9	(4) 4M x 9

MISCELLANEOUS TECHNICAL NOTE
Note: The location of pin 1 is unidentified.

Copyright © 1995, 1996, **Micro House International** (303) 443-3388. All rights reserved. Including the right of reproduction in any form.