


SIEMENS NIXDORF INFORMATIONSSYSTEME AG

S 2 6 3 6 1 - D 8 0 8 - A 2 1

Processor	Pentium
Processor Speed	60MHz
Chip Set	Intel
Video Chip Set	None
Maximum Onboard Memory	192MB
Maximum Video Memory	None
Cache	256KB
BIOS	Unidentified
Dimensions	330mm x 218mm
I/O Options	32-bit PCI slots (3), floppy drive interface, IDE interfaces (2), parallel port, PS/2 mouse port, serial ports (2)
NPU Options	None

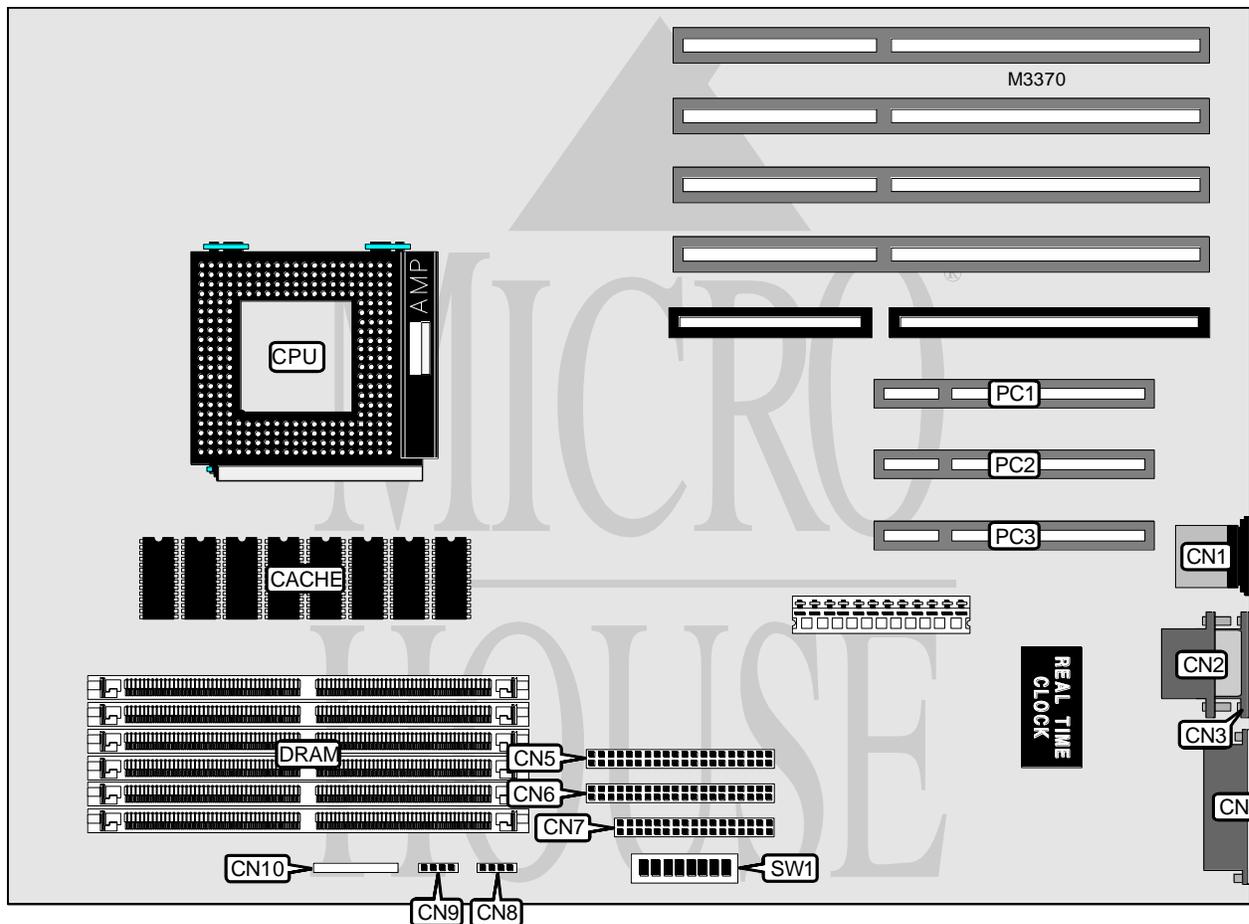

Continued on next page . . .

SIEMENS NIXDORF INFORMATIONSSYSTEME AG
S 2 6 3 6 1 - D 8 0 8 - A 2 1

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
PS/2 mouse port	CN1	Floppy drive interface	CN7
Serial port	CN2	Chassis fan power	CN8
Serial port	CN3	Speaker	CN9
Parallel port	CN4	Front panel connector	CN10
IDE interface 2	CN5	32-bit PCI slots	PC1 - PC3
IDE interface 1	CN6		

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Flash BIOS normal operation	SW1/1	Off
Flash BIOS recovery mode	SW1/1	On
í Password enabled	SW1/2	Off
Password disabled	SW1/2	On
í Port 0C91H bit select bit 2 set to 1	SW1/3	Off
Port 0C91H bit select bit 2 set to 0	SW1/3	On
í Port 0C91H bit select bit 3 set to 1	SW1/4	Off
Port 0C91H bit select bit 3 set to 0	SW1/4	On
í Flash BIOS write protect disabled	SW1/5	Off
Flash BIOS write protect enabled	SW1/5	On
í Floppy drive write protect disabled	SW1/6	Off
Floppy drive write protect enabled	SW1/6	On
í Factory configured - do not alter	SW1/7	Off
í System normal operation	SW1/8	Off
System runs loops of POST	SW1/8	On

DRAM CONFIGURATION			
Size	Bank 0	Bank 1	Bank 2
8MB	(2) 1M x 36	None	None
16MB	(2) 1M x 36	(2) 1M x 36	None
16MB	(2) 2M x 36	None	None
24MB	(2) 2M x 36	(2) 1M x 36	None
24MB	(2) 1M x 36	(2) 2M x 36	None
24MB	(2) 1M x 36	(2) 1M x 36	(2) 1M x 36
32MB	(2) 4M x 36	None	None
32MB	(2) 2M x 36	(2) 2M x 36	None
40MB	(2) 4M x 36	(2) 1M x 36	None
40MB	(2) 1M x 36	(2) 4M x 36	None
48MB	(2) 4M x 36	(2) 2M x 36	None
48MB	(2) 4M x 36	(2) 1M x 36	(2) 1M x 36
48MB	(2) 1M x 36	(2) 4M x 36	(2) 1M x 36
48MB	(2) 1M x 36	(2) 1M x 36	(2) 4M x 36
56MB	(2) 2M x 36	(2) 4M x 36	(2) 1M x 36

Continued on next page...

SIEMENS NIXDORF INFORMATIONSSYSTEME AG

S 2 6 3 6 1 - D 8 0 8 - A 2 1

... continued from previous page

DRAM CONFIGURATION (CON'T)			
Size	Bank 0	Bank 1	Bank 2
56MB	(2) 2M x 36	(2) 1M x 36	(2) 4M x 36
56MB	(2) 4M x 36	(2) 1M x 36	(2) 2M x 36
56MB	(2) 4M x 36	(2) 2M x 36	(2) 1M x 36
56MB	(2) 1M x 36	(2) 2M x 36	(2) 4M x 36
56MB	(2) 1M x 36	(2) 4M x 36	(2) 2M x 36
64MB	(2) 8M x 36	None	None
64MB	(2) 4M x 36	(2) 4M x 36	None
64MB	(2) 4M x 36	(2) 2M x 36	(2) 2M x 36
64MB	(2) 2M x 36	(2) 4M x 36	(2) 2M x 36
64MB	(2) 2M x 36	(2) 2M x 36	(2) 4M x 36
80MB	(2) 2M x 36	(2) 8M x 36	None
80MB	(2) 8M x 36	(2) 2M x 36	None
80MB	(2) 1M x 36	(2) 8M x 36	(2) 1M x 36
80MB	(2) 1M x 36	(2) 1M x 36	(2) 8M x 36
80MB	(2) 8M x 36	(2) 1M x 36	(2) 1M x 36
88MB	(2) 8M x 36	(2) 2M x 36	(2) 1M x 36
88MB	(2) 1M x 36	(2) 2M x 36	(2) 8M x 36
88MB	(2) 2M x 36	(2) 8M x 36	(2) 1M x 36
88MB	(2) 2M x 36	(2) 1M x 36	(2) 8M x 36
88MB	(2) 8M x 36	(2) 1M x 36	(2) 2M x 36
96MB	(2) 8M x 36	(2) 4M x 36	None
96MB	(2) 4M x 36	(2) 8M x 36	None
96MB	(2) 4M x 36	(2) 4M x 36	(2) 4M x 36
96MB	(2) 8M x 36	(2) 2M x 36	(2) 2M x 36
96MB	(2) 2M x 36	(2) 8M x 36	(2) 2M x 36
104MB	(2) 1M x 36	(2) 4M x 36	(2) 8M x 36
104MB	(2) 4M x 36	(2) 1M x 36	(2) 8M x 36
104MB	(2) 8M x 36	(2) 1M x 36	(2) 4M x 36
104MB	(2) 8M x 36	(2) 4M x 36	(2) 1M x 36
112MB	(2) 8M x 36	(2) 2M x 36	(2) 4M x 36
112MB	(2) 4M x 36	(2) 8M x 36	(2) 2M x 36
112MB	(2) 4M x 36	(2) 2M x 36	(2) 8M x 36
112MB	(2) 2M x 36	(2) 4M x 36	(2) 8M x 36
112MB	(2) 8M x 36	(2) 4M x 36	(2) 2M x 36
112MB	(2) 2M x 36	(2) 8M x 36	(2) 4M x 36
128MB	(2) 4M x 36	(2) 4M x 36	(2) 8M x 36
128MB	(2) 4M x 36	(2) 8M x 36	(2) 4M x 36
128MB	(2) 8M x 36	(2) 4M x 36	(2) 4M x 36
136MB	(2) 8M x 36	(2) 1M x 36	(2) 8M x 36
136MB	(2) 1M x 36	(2) 8M x 36	(2) 8M x 36
136MB	(2) 8M x 36	(2) 8M x 36	(2) 1M x 36
192MB	(2) 8M x 36	(2) 8M x 36	(2) 8M x 36

Continued on next page...

SIEMENS NIXDORF INFORMATIONSSYSTEME AG
S 2 6 3 6 1 - D 8 0 8 - A 2 1

. . . continued from previous page

CACHE CONFIGURATION

Note: 256KB cache is factory installed and is not configurable.

MISCELLANEOUS TECHNICAL NOTE

Note: The location of pin 1 on the connectors and switch are unidentified.